



OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id
VOLKSWAGEN ALEX VOLKSWAGEN CORRADO

Component
Gasoline Engine

Fluid
CASTROL EDGE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal. The wear metal levels do not reflect the suspected bearing problem.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0727213	---	---
Sample Date	Client Info			05 Jul 2023	---	---
Machine Age	mls	Client Info		127000	---	---
Oil Age	mls	Client Info		300	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Glycol	WC Method			NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	18	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>40	6	---	---
Lead	ppm	ASTM D5185m	>50	1	---	---
Copper	ppm	ASTM D5185m	>155	3	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
Cadmium	ppm	ASTM D5185m		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		79	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		124	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		388	---	---
Calcium	ppm	ASTM D5185m		1126	---	---
Phosphorus	ppm	ASTM D5185m		661	---	---
Zinc	ppm	ASTM D5185m		821	---	---
Sulfur	ppm	ASTM D5185m		2282	---	---



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	17	---	---
Sodium	ppm	ASTM D5185m	>400	4	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Fuel	%	ASTM D3524	>4.0	<1.0	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	4.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	13.3	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	6.9	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		7.12	---	---







OIL ANALYSIS REPORT

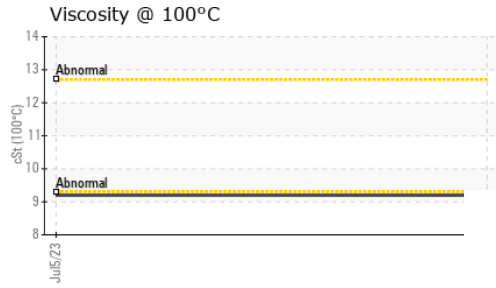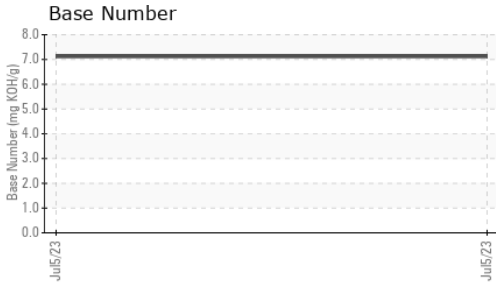

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	9.2	---	---

GRAPHS

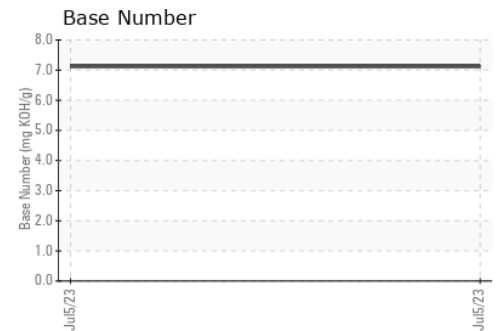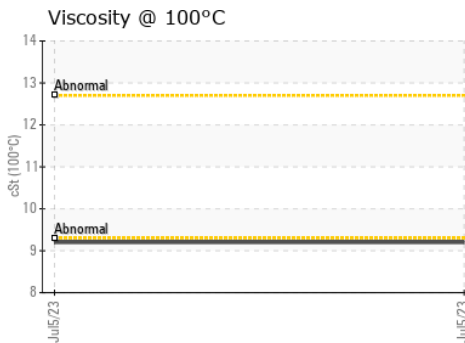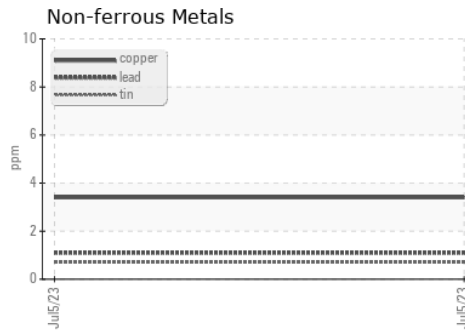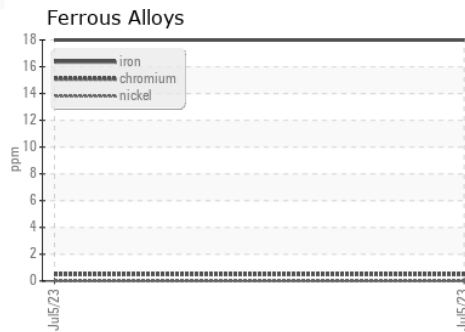

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0727213 **Received** : 20 Jul 2023
Lab Number : 05903429 **Diagnosed** : 25 Jul 2023
Unique Number : 10564785 **Diagnostician** : Doug Bogart
Test Package : IND 2 (Additional Tests: FuelDilution, PercentFuel)

JOHN HENRY FOSTER MINNESOTA INC.
 3103 MIKE COLLINS DRIVE
 EAGAN, MN
 US 55121
 Contact: MARTY ADAM
 marty.adam@jhfooster.com
 T: (651)681-5745
 F: (651)681-0536

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)