

PROBLEM SUMMARY

Sample Rating Trend

WEAR


••••••

Martinsville [Martinsville] Oil - Starboard Main Engine

Starboard Main Engine

DIESEL ENGINE OIL SAE 15W40 (150 GAL)

COMPONENT CONDITION SUMMARY

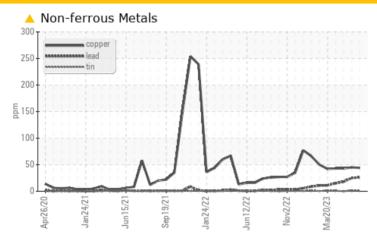

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC T	EST RE	SULTS				
Sample Status				MARGINAL	ABNORMAL	NORMAL
Lead	ppm	ASTM D5185m	>18	^ 26	<u>^</u> 25	18

Customer Id: MARCAT Sample No.: WC0769181 Lab Number: 05903431 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

13 Jun 2023 Diag: Jonathan Hester

WEAR



No corrective action is recommended at this time. Resample at the next service interval to monitor. Bearing and/or bushing wear is indicated. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.



15 May 2023 Diag: Don Baldridge

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.



18 Apr 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

SAMPLE INFORMATION method

Sample Rating Trend

WEAR

Martinsville

[Martinsville] Oil - Starboard Main Engine

Starboard Main Engine

DIESEL ENGINE OIL SAE 15W40 (150 GAL)

Recommendation

DIAGNOSIS

No corrective action is recommended at this time. Resample at the next service interval to monitor.


Bearing and/or bushing wear is indicated.

Contamination

There is no indication of any contamination in the

Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.



	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0769181	WC0769441	WC0683411
Sample Date		Client Info		10 Jul 2023	13 Jun 2023	15 May 2023
Machine Age	hrs	Client Info		16120	15506	14928
Oil Age	hrs	Client Info		7446	728	6252
Oil Changed		Client Info		N/A	Not Changd	N/A
Sample Status				MARGINAL	ABNORMAL	NORMAL
CONTAMINATION		method	limit/base	O LIVE OUT	biotom/1	hiotom (O
	V			current	history1	history2
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Glycol		WC Method		NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>75	50	50	42
Chromium	ppm	ASTM D5185m	>8	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	<1	0
Titanium	ppm	ASTM D5185m	>3	<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	1	2	2
Lead	ppm	ASTM D5185m	>18	^ 26	<u>^</u> 25	18
Copper	ppm	ASTM D5185m	>80	44	45	43
Tin	ppm	ASTM D5185m	>14	1	1	0
Vanadium	ppm	ASTM D5185m		<1	<1	<1
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history2
ADDITIVES Boron	ppm				history1	history2 67
Boron	ppm	ASTM D5185m	250	60	69	history2 67
Boron Barium	ppm	ASTM D5185m ASTM D5185m	250 10	60 0	69 0	67
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	250	60 0 84	69 0 87	67 0 81
Boron Barium Molybdenum Manganese	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	250 10 100	60 0 84 <1	69 0 87 1	67 0 81 <1
Boron Barium Molybdenum	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	250 10	60 0 84 <1 1379	69 0 87	67 0 81
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	250 10 100 450	60 0 84 <1	69 0 87 1 1481	67 0 81 <1 1374
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	250 10 100 450 3000	60 0 84 <1 1379 1587	69 0 87 1 1481 1728	67 0 81 <1 1374 1523
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	250 10 100 450 3000 1150	60 0 84 <1 1379 1587 1002	69 0 87 1 1481 1728 1076	67 0 81 <1 1374 1523 969
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	250 10 100 450 3000 1150 1350 4250	60 0 84 <1 1379 1587 1002 1239 3429	69 0 87 1 1481 1728 1076 1360 3709	67 0 81 <1 1374 1523 969 1253 3450
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	250 10 100 450 3000 1150 1350 4250 limit/base	60 0 84 <1 1379 1587 1002 1239 3429	69 0 87 1 1481 1728 1076 1360 3709 history1	67 0 81 <1 1374 1523 969 1253 3450 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	250 10 100 450 3000 1150 1350 4250 limit/base >20	60 0 84 <1 1379 1587 1002 1239 3429 current 5	69 0 87 1 1481 1728 1076 1360 3709 history1	67 0 81 <1 1374 1523 969 1253 3450 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	250 10 100 450 3000 1150 1350 4250 limit/base >20 >158	60 0 84 <1 1379 1587 1002 1239 3429 current 5 4	69 0 87 1 1481 1728 1076 1360 3709 history1 5	67 0 81 <1 1374 1523 969 1253 3450 history2 6 4
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	250 10 100 450 3000 1150 1350 4250 limit/base >20 >158 >20	60 0 84 <1 1379 1587 1002 1239 3429 current 5 4 <1	69 0 87 1 1481 1728 1076 1360 3709 history1 5 4	67 0 81 <1 1374 1523 969 1253 3450 history2 6 4
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	250 10 100 450 3000 1150 1350 4250 limit/base >20 >158	60 0 84 <1 1379 1587 1002 1239 3429 current 5 4 <1	69 0 87 1 1481 1728 1076 1360 3709 history1 5 4 2	67 0 81 <1 1374 1523 969 1253 3450 history2 6 4 2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	250 10 100 450 3000 1150 1350 4250 limit/base >20 >158 >20 limit/base	60 0 84 <1 1379 1587 1002 1239 3429 current 5 4 <1 current 0.5	69 0 87 1 1481 1728 1076 1360 3709 history1 5 4 2 history1 0.5	67 0 81 <1 1374 1523 969 1253 3450 history2 6 4 2 history2 0.5
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m method *ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	250 10 100 450 3000 1150 1350 4250 limit/base >20 >158 >20 limit/base	60 0 84 <1 1379 1587 1002 1239 3429 current 5 4 <1 current 0.5 14.0	69 0 87 1 1481 1728 1076 1360 3709 history1 5 4 2 history1 0.5 13.6	67 0 81 <1 1374 1523 969 1253 3450 history2 6 4 2 history2 0.5 13.6
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	250 10 100 450 3000 1150 1350 4250 limit/base >20 >158 >20 limit/base	60 0 84 <1 1379 1587 1002 1239 3429 current 5 4 <1 current 0.5	69 0 87 1 1481 1728 1076 1360 3709 history1 5 4 2 history1 0.5	67 0 81 <1 1374 1523 969 1253 3450 history2 6 4 2 history2 0.5
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m method *ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	250 10 100 450 3000 1150 1350 4250 limit/base >20 >158 >20 limit/base	60 0 84 <1 1379 1587 1002 1239 3429 current 5 4 <1 current 0.5 14.0	69 0 87 1 1481 1728 1076 1360 3709 history1 5 4 2 history1 0.5 13.6	67 0 81 <1 1374 1523 969 1253 3450 history2 6 4 2 history2 0.5 13.6
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m Method ASTM D5185m ASTM D7844 *ASTM D7624 *ASTM D7415	250 10 100 450 3000 1150 1350 4250 limit/base >20 >158 >20 limit/base	60 0 84 <1 1379 1587 1002 1239 3429 current 5 4 <1 current 0.5 14.0 27.1	69 0 87 1 1481 1728 1076 1360 3709 history1 5 4 2 history1 0.5 13.6 28.6	67 0 81 <1 1374 1523 969 1253 3450 history2 6 4 2 history2 0.5 13.6 28.1
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation FLUID DEGRADA Oxidation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m Method *ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method *ASTM D7844 *ASTM D7844 *ASTM D7844 *ASTM D7844 *ASTM D7844	250 10 100 450 3000 1150 1350 4250 limit/base >20 >158 >20 limit/base >20 >imit/base >20 >imit/base	60 0 84 <1 1379 1587 1002 1239 3429 current 5 4 <1 current 0.5 14.0 27.1 current	69 0 87 1 1481 1728 1076 1360 3709 history1 5 4 2 history1 0.5 13.6 28.6 history1	67 0 81 <1 1374 1523 969 1253 3450 history2 6 4 2 history2 0.5 13.6 28.1 history2




OIL ANALYSIS REPORT

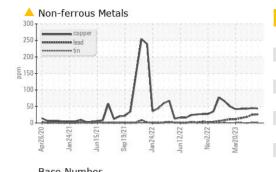



VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG


12.0 - Abn	ormal	_	1	^	1		
10.0 Bass 8.0 Abn	7			V		1	~
6.0							
4.0 - Abn	ormal						
2.0-							
2.0		1					Mar20/23




Ferrous Alloys







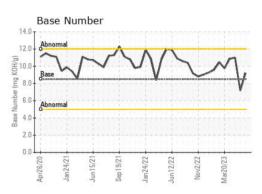





Certificate L2367

Laboratory Sample No. Lab Number Unique Number

Test Package : IND 2

: WC0769181 : 05903431 : 10564787

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 20 Jul 2023 : 25 Jul 2023 Diagnosed Diagnostician : Doug Bogart

MARATHON PETROLEUM CO.

101 12TH ST CATLETTSBURG, KY US 41169

Contact: CORY GUMBERT

cagumbert@marathonpetroleum.com T: (606)585-3950

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x: