




# OIL ANALYSIS REPORT



Area  
**OKLAHOMA/102/EG - DOZER**  
 Machine Id  
**38.83 [OKLAHOMA^102^EG - DOZER]**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

Sample Rating Trend

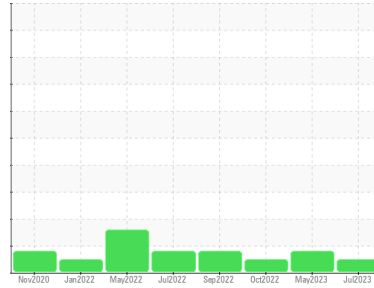

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: 9017 hrs )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0746897</b>	WC0746730	WC0673602
Sample Date	Client Info	<b>15 Jul 2023</b>	10 May 2023	03 Oct 2022
Machine Age	hrs	<b>9017</b>	8662	8217
Oil Age	hrs	<b>8217</b>	8217	8217
Oil Changed	Client Info	<b>N/A</b>	N/A	Not Changd
Sample Status		<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	<b>36</b>	42	25
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	6	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>3</b>	1	<1
Lead	ppm	ASTM D5185m >40	<b>0</b>	6	0
Copper	ppm	ASTM D5185m >330	<b>121</b>	▲ 352	225
Tin	ppm	ASTM D5185m >15	<b>2</b>	3	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 250	<b>20</b>	23	43
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>43</b>	42	40
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 450	<b>552</b>	520	486
Calcium	ppm	ASTM D5185m 3000	<b>1835</b>	1860	1758
Phosphorus	ppm	ASTM D5185m 1150	<b>742</b>	763	743
Zinc	ppm	ASTM D5185m 1350	<b>978</b>	968	886
Sulfur	ppm	ASTM D5185m 4250	<b>2622</b>	2362	2956

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>7</b>	9	4
Sodium	ppm	ASTM D5185m >158	<b>5</b>	12	2
Potassium	ppm	ASTM D5185m >20	<b>0</b>	<1	0

## INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	<b>1.5</b>	1.4	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.4</b>	11.6	7.2
Sulfation	Abs:.1mm	*ASTM D7415 >30	<b>23.3</b>	24.2	24.2

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs:.1mm	*ASTM D7414 >25	<b>21.3</b>	22.8	20.6
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>8.7</b>	9.0	11.0







# OIL ANALYSIS REPORT

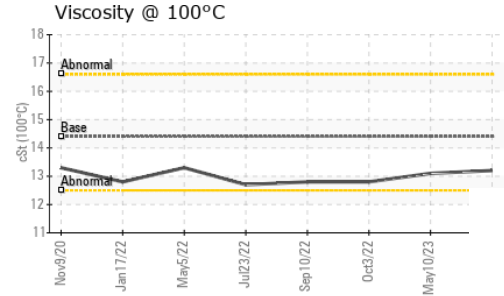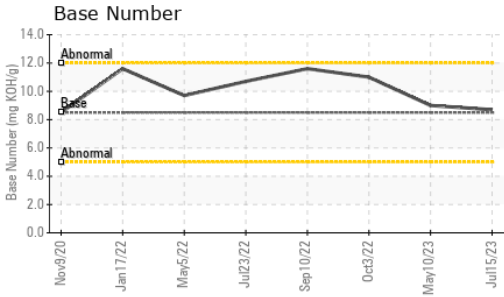

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.2</b>	13.1	12.8

## GRAPHS

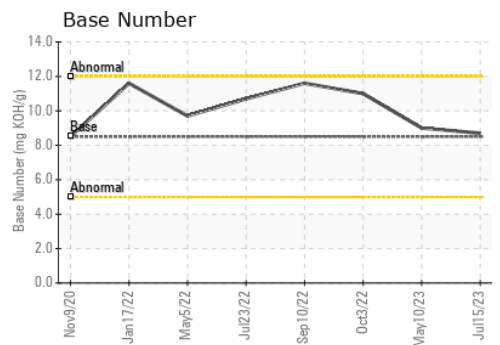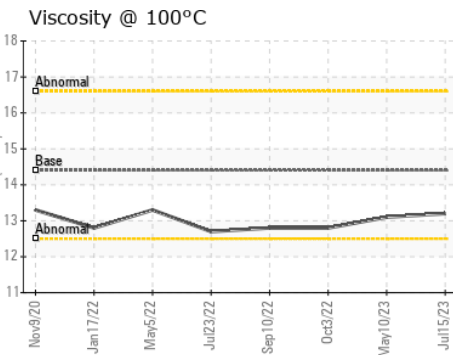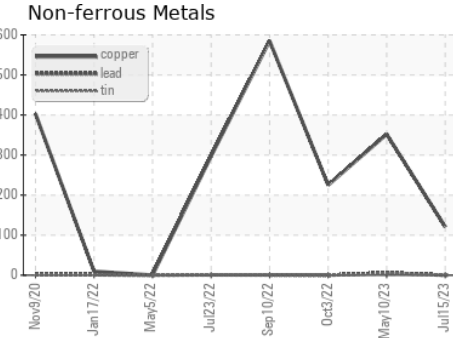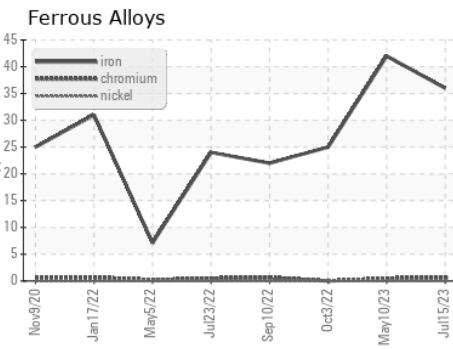

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0746897 **Received** : 20 Jul 2023  
**Lab Number** : 05903665 **Diagnosed** : 24 Jul 2023  
**Unique Number** : 10565021 **Diagnostician** : Don Baldrige  
**Test Package** : CONST ( Additional Tests: TBN )

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)