


OIL ANALYSIS REPORT

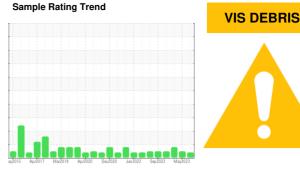

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in

Moderate concentration of visible dirt/debris present

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

All component wear rates are normal.

DIAGNOSIS

this sample. Wear

in the oil. Fluid Condition

Contamination

CATERPILLAR 980H LOADER 6583 (S/N JMS05055) Component Hydraulic System

TULCO LUBSOIL SUPER HYDRAULIC HZ 46 (--- GAL)

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO10002310	TO10002227	TO10001792
Sample Date		Client Info		14 Jul 2023	03 May 2023	16 Feb 2023
Machine Age	hrs	Client Info		33615	33129	32610
Oil Age	hrs	Client Info		4023	3537	3018
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				ABNORMAL	NORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	10	14	13
Chromium	ppm	ASTM D5185m	>10	<1	1	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	2	3	2
Lead	ppm	ASTM D5185m	>10	0	2	0
Copper	ppm	ASTM D5185m	>75	1	3	3
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		140	63	42
Calcium	ppm	ASTM D5185m		204	174	153
Phosphorus	ppm	ASTM D5185m		597	493	375
Zinc	ppm	ASTM D5185m		741	587	467
Sulfur	ppm	ASTM D5185m		2816	1895	1770
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	7	7	6
Sodium	ppm	ASTM D5185m		2	3	<1
Potassium	ppm	ASTM D5185m	>20	<1	3	<1
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000		2197	▲ 7055
Particles >6µm		ASTM D7647	>1300		188	919
Particles >14µm		ASTM D7647	>160		14	23
Particles >21µm		ASTM D7647	>40		3	3
Particles >38µm		ASTM D7647	>10		0	0
Particles >71µm		ASTM D7647	>3		0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14		18/15/11	▲ 20/17/12
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.72	0.56	0.48
	0 0					


Report Id: ANCTUL [WUSCAR] 05903737 (Generated: 07/26/2023 12:04:51) Rev: 1



0.00

Dec7/15

OIL ANALYSIS REPORT

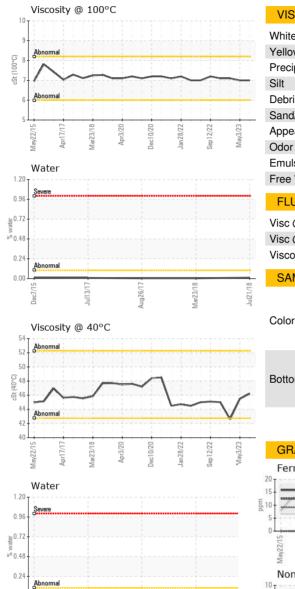


Aug26/17

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	A MODER	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		46.2	45.5	42.6
Visc @ 100°C	cSt	ASTM D445		7	7	7.1
Viscosity Index (VI)	Scale	ASTM D2270		108	111	127
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color						001792



Bottom

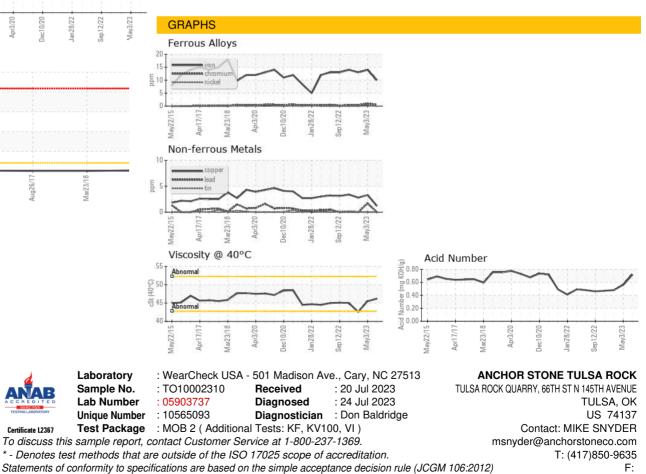

Certificate L2367

Submitted By: SKIP SAENGERHAUSEN