

## **OIL ANALYSIS REPORT**

### Sample Rating Trend





Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Aug2020	Jul2021	Mar2022 Oct2022	Jul2023			
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		KCPA003219	KCP47910D	KCP44008		
Sample Date		Client Info		05 Jul 2023	20 Oct 2022	16 Mar 2022		
Machine Age	hrs	Client Info		20805	16565	12889		
Oil Age	hrs	Client Info		0	7314	3638		
Oil Changed		Client Info		N/A	Changed	Not Changd		
Sample Status				NORMAL	NORMAL	NORMAL		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	1	<1	1		
Chromium	ppm	ASTM D5185m	>10	0	<1	0		
Nickel	ppm	ASTM D5185m	>3	0	<1	0		
Titanium	ppm	ASTM D5185m	>3	0	<1	0		
Silver	ppm	ASTM D5185m	>2	0	<1	0		
Aluminum	ppm	ASTM D5185m	>10	2	2	2		
Lead	ppm	ASTM D5185m	>10	0	0	0		
Copper	ppm	ASTM D5185m	>50	8	12	6		
Tin	ppm	ASTM D5185m	>10	0	<1	<1		
Antimony	ppm	ASTM D5185m	-					
Vanadium	ppm	ASTM D5185m		0	<1	0		
Cadmium	ppm	ASTM D5185m		0	<1	0		
ADDITIVES	44.11	method	limit/base		history1	history2		
			iimivbase					
Boron	ppm	ASTM D5185m		0	0	0		
Barium	ppm	ASTM D5185m	90	0	0	0		
Molybdenum	ppm	ASTM D5185m		0	<1	0		
Manganese	ppm	ASTM D5185m		1	2	<1		
Magnesium	ppm	ASTM D5185m	90	9	0	11		
Calcium	ppm	ASTM D5185m	2	0	0	0		
Phosphorus	ppm	ASTM D5185m		6	4	7		
Zinc	ppm	ASTM D5185m		2	16	49		
Sulfur	ppm	ASTM D5185m		22022	20248	16446		
CONTAMINANTS		method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	0	2	<1		
Sodium	ppm	ASTM D5185m		4	3	4		
Potassium	ppm	ASTM D5185m	>20	<1	1	2		
Water	%	ASTM D6304	>0.05	0.008	0.008	0.005		
ppm Water	ppm	ASTM D6304	>500	85.7	85.9	55.9		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2		
Particles >4µm		ASTM D7647		2039	1345	1316		
Particles >6µm		ASTM D7647	>1300	670	415	394		
Particles >14µm		ASTM D7647	>80	59	36	37		
Particles >21µm		ASTM D7647	>20	17	6	6		
Particles >38µm		ASTM D7647	>4	0	0	0		
Particles >71µm		ASTM D7647	>3	0	0	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/17/13	18/16/12	16/12		
FLUID DEGRADA		method	limit/base	current	history1	history2		
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.45	0.37	0.37		
:08:55) Rev: 1					Contact/Location: TED HARRIS - DATEM			


Report Id: DATEMI [WUSCAR] 05903790 (Generated: 07/24/2023 14:08:55) Rev: 1


Contact/Location: TED HARRIS - DATEMI



# **OIL ANALYSIS REPORT**

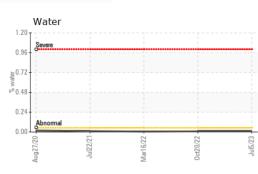


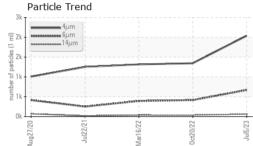

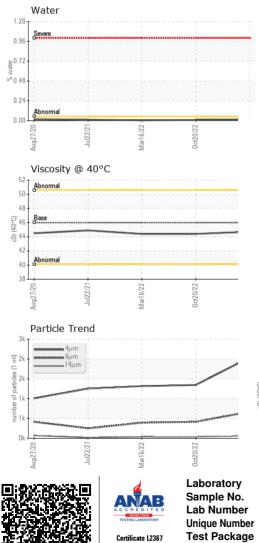

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.7	44.4	44.4
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color				J		3
Bottom						



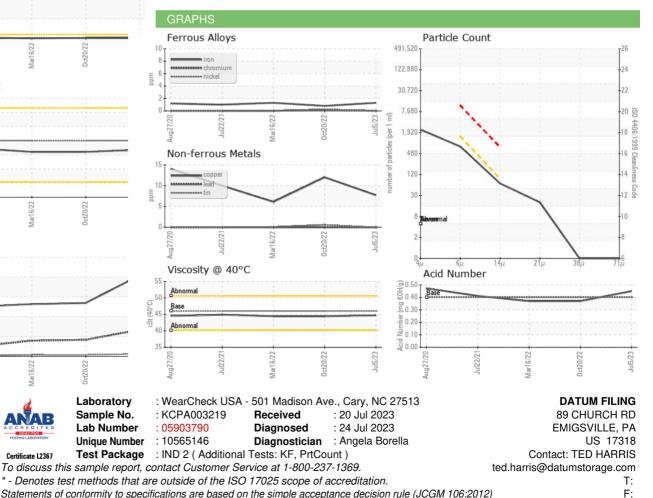

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)