




Machine Id **4762247 (S/N 1003)** Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

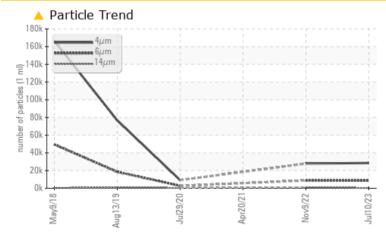

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Sample Rating Trend ISO

PROBLEMATIC TEST RESULTS							
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL		
Particles >6µm	ASTM D7647 >	>1300	<u> </u>	▲ 8864			
Particles >14µm	ASTM D7647 >	>80	A 312	9 20			
Particles >21µm	ASTM D7647 >	>20	<u> </u>	A 307			
Oil Cleanliness	ISO 4406 (c) >	>/17/13	<u> </u>	🔺 22/20/17			

Customer Id: CHEBALMAR Sample No.: KCPA004261 Lab Number: 05903805 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

09 Nov 2022 Diag: Angela Borella

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

20 Apr 2021 Diag: Doug Bogart

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

29 Jul 2020 Diag: Don Baldridge

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report









OIL ANALYSIS REPORT

Sample Rating Trend ISO

Machine Id 4762247 (S/N 1003) Component Compressor

Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA004261	KCP47723	KCP28128
Sample Date		Client Info		10 Jul 2023	09 Nov 2022	20 Apr 2021
Machine Age	hrs	Client Info		87234	53520	44901
Oil Age	hrs	Client Info		0	3446	3843
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	2	2	3
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	2	1	1
Lead	ppm	ASTM D5185m	>10	0	<1	0
Copper	ppm	ASTM D5185m	>50	14	14	7
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	14
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	100	4	24	36
Calcium	ppm	ASTM D5185m	0	0	0	<1
Phosphorus	ppm	ASTM D5185m	0	0	7	8
Zinc	ppm	ASTM D5185m	0	0	30	18
Sulfur	ppm	ASTM D5185m	23500	26545	25056	17779
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm					
		$\Delta S I M D 5 185m$	<25	-1	1	~1
		ASTM D5185m ASTM D5185m	>25	<1 2	9	<1 10
Sodium	ppm	ASTM D5185m		2	9	10
Sodium Potassium	ppm ppm	ASTM D5185m ASTM D5185m	>20	2 0	9 2	10 1
Sodium Potassium Water	ppm	ASTM D5185m	>20 >0.05	2	9	10
Sodium Potassium Water ppm Water	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304	>20 >0.05 >500	2 0 0.007 79.2	9 2 0.014 146.7	10 1 0.017 170.2
Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>20 >0.05	2 0 0.007 79.2 current	9 2 0.014 146.7 history1	10 1 0.017
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>20 >0.05 >500 limit/base	2 0 0.007 79.2 current 28532	9 2 0.014 146.7 history1 27888	10 1 0.017 170.2 history2
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300	2 0 0.007 79.2 <u>current</u> 28532 ▲ 8690	9 2 0.014 146.7 history1 27888 ▲ 8864	10 1 0.017 170.2 history2
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80	2 0 0.007 79.2 <u>current</u> 28532 ▲ 8690 ▲ 312	9 2 0.014 146.7 27888 ▲ 8864 ▲ 920	10 1 0.017 170.2 history2
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80	2 0 0.007 79.2 28532 ▲ 8690 ▲ 312 ▲ 67	9 2 0.014 146.7 27888 ▲ 8864 ▲ 920 ▲ 307	10 1 0.017 170.2 history2
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80 >20 >4	2 0 0.007 79.2 28532 ▲ 8690 ▲ 312 ▲ 67 2	9 2 0.014 146.7 27888 ▲ 8864 ▲ 920	10 1 0.017 170.2 history2
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80 >20 >4	2 0 0.007 79.2 28532 ▲ 8690 ▲ 312 ▲ 67	9 2 0.014 146.7 27888 ▲ 8864 ▲ 920 ▲ 307 ▲ 17	10 1 0.017 170.2 history2
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm Oil Cleanliness	ppm ppm % ppm ESS	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ISO 4406 (c)	>20 >0.05 >500 limit/base >1300 >80 >20 >4 >3 >/17/13	2 0 0.007 79.2 28532 ▲ 8690 ▲ 312 ▲ 67 2 0 0 ▲ 22/20/15	9 2 0.014 146.7 27888 ▲ 8864 ▲ 920 ▲ 307 ▲ 17 0 22/20/17	10 1 0.017 170.2 history2
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm % ppm ESS	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80 >20 >4 >3 >/17/13 limit/base	2 0 0.007 79.2 28532 ▲ 8690 ▲ 312 ▲ 67 2 0	9 2 0.014 146.7 27888 ▲ 8864 ▲ 920 ▲ 307 ▲ 17 0	10 1 0.017 170.2 history2


Report Id: CHEBALMAR [WUSCAR] 05903805 (Generated: 07/27/2023 19:29:12) Rev: 1

Contact/Location: KENNETH WAGNER - CHEBALMAR



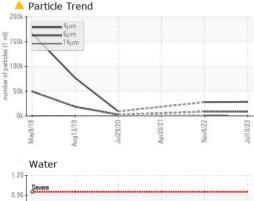

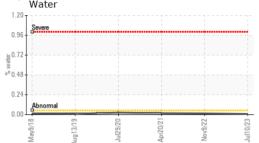

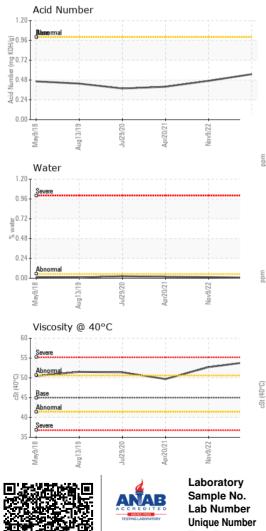

OIL ANALYSIS REPORT

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	54.1	52.7	49.7
SAMPLE IMAGES	5	method	limit/base	current	history1	history2
Color						
				1		1998

Bottom

