PROBLEM SUMMARY

Sample Rating Trend

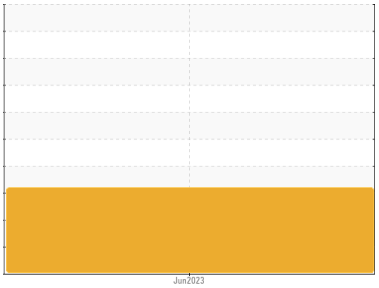

WATER

Machine Id
6135593 (S/N 1034)
Component
Compressor
Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

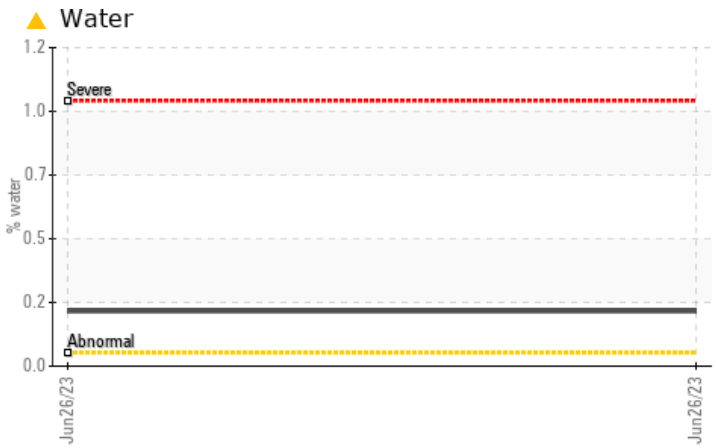

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. There is too much water present in this sample to perform a particle count. We recommend an early resample in 500 hours to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				**ABNORMAL**	---	---
Water	%	ASTM D6304	>0.05	▲ **0.207**	---	---
ppm Water	ppm	ASTM D6304	>500	▲ **2070**	---	---
Emulsified Water	scalar	*Visual	>0.05	▲ **0.2%**	---	---
Free Water	scalar	*Visual		▲ **20.0**	---	---

Customer Id: CNYDAN
Sample No.: KC77670
Lab Number: 05903810
Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data:
Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

KAESER COMPRESSORS
Built for a lifetime.

OIL ANALYSIS REPORT

Sample Rating Trend

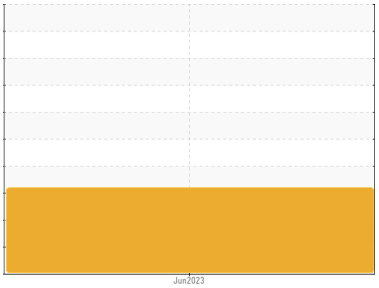

WATER

Machine Id
6135593 (S/N 1034)
Component
Compressor
Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

▲ Recommendation
Oil and filter change at the time of sampling has been noted. There is too much water present in this sample to perform a particle count. We recommend an early resample in 500 hours to monitor this condition.

Wear
All component wear rates are normal.

▲ Contamination
There is a moderate concentration of water present in the oil. Excessive free water present.

Fluid Condition
The AN level is acceptable for this fluid.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**KC77670**	---	---
Sample Date		Client Info		**26 Jun 2023**	---	---
Machine Age	hrs	Client Info		**1429**	---	---
Oil Age	hrs	Client Info		**0**	---	---
Oil Changed		Client Info		**Changed**	---	---
Sample Status				**ABNORMAL**	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	**0**	---	---
Chromium	ppm	ASTM D5185m	>10	**0**	---	---
Nickel	ppm	ASTM D5185m	>3	**0**	---	---
Titanium	ppm	ASTM D5185m	>3	**0**	---	---
Silver	ppm	ASTM D5185m	>2	**0**	---	---
Aluminum	ppm	ASTM D5185m	>10	**0**	---	---
Lead	ppm	ASTM D5185m	>10	**0**	---	---
Copper	ppm	ASTM D5185m	>50	**0**	---	---
Tin	ppm	ASTM D5185m	>10	**0**	---	---
Vanadium	ppm	ASTM D5185m		**0**	---	---
Cadmium	ppm	ASTM D5185m		**0**	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		**0**	---	---
Barium	ppm	ASTM D5185m	90	**0**	---	---
Molybdenum	ppm	ASTM D5185m		**0**	---	---
Manganese	ppm	ASTM D5185m		**0**	---	---
Magnesium	ppm	ASTM D5185m	90	**2**	---	---
Calcium	ppm	ASTM D5185m	2	**4**	---	---
Phosphorus	ppm	ASTM D5185m		**315**	---	---
Zinc	ppm	ASTM D5185m		**0**	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	**0**	---	---
Sodium	ppm	ASTM D5185m		**<1**	---	---
Potassium	ppm	ASTM D5185m	>20	**0**	---	---
Water	%	ASTM D6304	>0.05	▲ **0.207**	---	---
ppm Water	ppm	ASTM D6304	>500	▲ **2070**	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	**0.86**	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	---	---
Yellow Metal	scalar	*Visual	NONE	**NONE**	---	---
Precipitate	scalar	*Visual	NONE	**NONE**	---	---
Silt	scalar	*Visual	NONE	**NONE**	---	---
Debris	scalar	*Visual	NONE	**NONE**	---	---
Sand/Dirt	scalar	*Visual	NONE	**NONE**	---	---
Appearance	scalar	*Visual	NORML	**NORML**	---	---
Odor	scalar	*Visual	NORML	**NORML**	---	---
Emulsified Water	scalar	*Visual	>0.05	▲ **0.2%**	---	---
Free Water	scalar	*Visual		▲ **20.0**	---	---

OIL ANALYSIS REPORT

Water

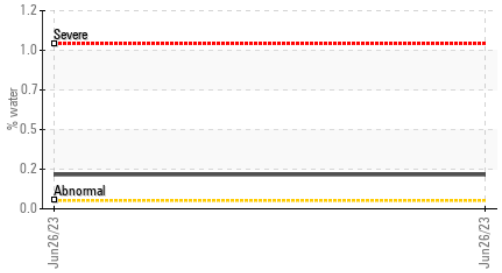

Acid Number

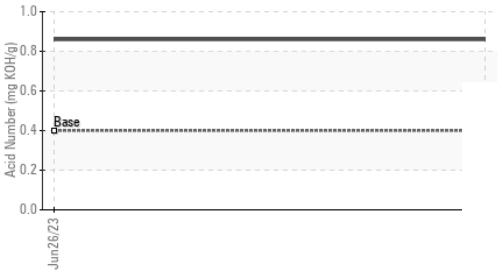

Viscosity @ 40°C

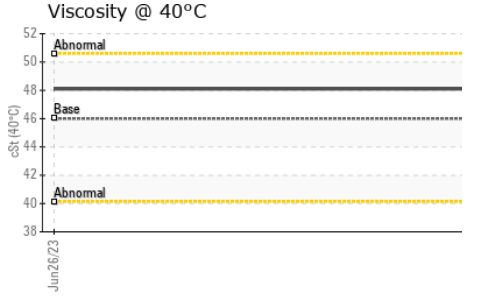

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	**48.1**	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				*no image*	*no image*
Bottom				*no image*	*no image*

GRAPHS

Ferrous Alloys

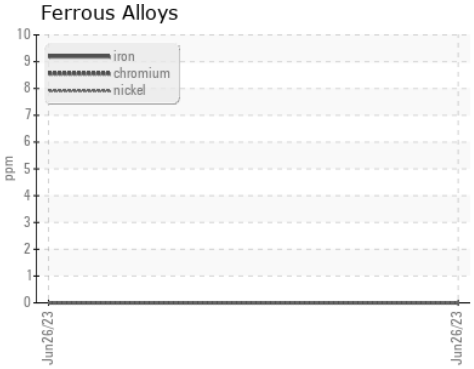

Non-ferrous Metals

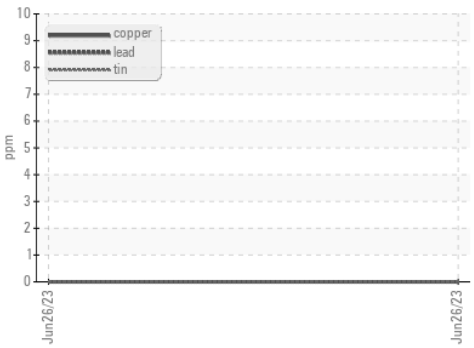

Viscosity @ 40°C

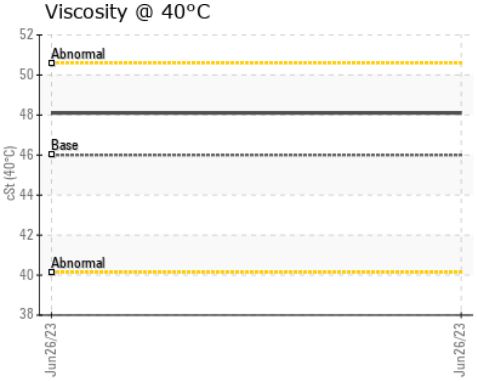

Acid Number

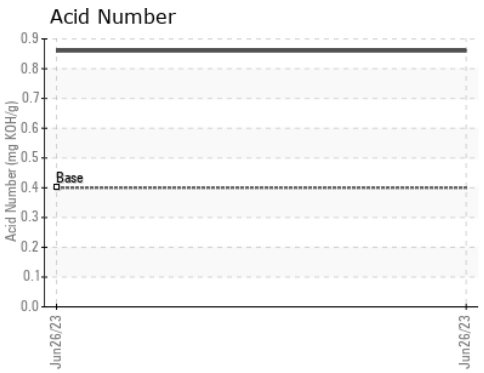

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC77670
Lab Number : 05903810
Unique Number : 10565166
Test Package : IND 2

Received : 20 Jul 2023
Diagnosed : 31 Jul 2023
Diagnostician : Doug Bogart

C & N YACHT REFINISHING INC
750 NE 7TH AVE
DANIA BEACH, FL
US 33004
Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: