




# OIL ANALYSIS REPORT



Area  
**OKLAHOMA/102/EG - MOTOR GRADER**  
 Machine Id  
**78.255 [OKLAHOMA^102^EG - MOTOR GRADER]**  
 Component  
**Left Tandem**  
 Fluid  
**MOBIL 50W (--- GAL)**

## Sample Rating Trend

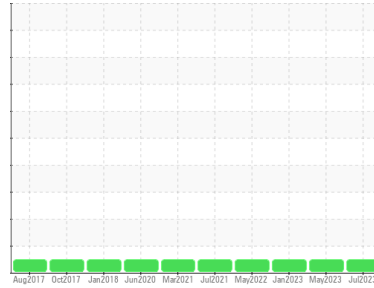

**NORMAL**



### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: 9667 hrs )

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0746899</b>	WC0807915	WC0603250
Sample Date	Client Info		<b>15 Jul 2023</b>	25 May 2023	17 Jan 2023
Machine Age	hrs	Client Info	<b>9667</b>	9450	9210
Oil Age	hrs	Client Info	<b>9450</b>	7854	7614
Oil Changed	Client Info		<b>N/A</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >425	<b>45</b>	38	36
Chromium	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >5	<b>1</b>	0	1
Lead	ppm	ASTM D5185m	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >8	<b>0</b>	0	<1
Tin	ppm	ASTM D5185m	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>8</b>	7	7
Barium	ppm	ASTM D5185m	<b>0</b>	0	1
Molybdenum	ppm	ASTM D5185m	<b>4</b>	4	4
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>27</b>	30	25
Calcium	ppm	ASTM D5185m	<b>2966</b>	2947	2568
Phosphorus	ppm	ASTM D5185m	<b>1027</b>	1051	825
Zinc	ppm	ASTM D5185m	<b>1232</b>	1322	1072
Sulfur	ppm	ASTM D5185m	<b>13408</b>	15485	11623

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>4</b>	5	4
Sodium	ppm	ASTM D5185m	<b>2</b>	4	4
Potassium	ppm	ASTM D5185m >20	<b>1</b>	2	0

### VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	MODER
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

### FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	<b>189</b>	190	190






# OIL ANALYSIS REPORT

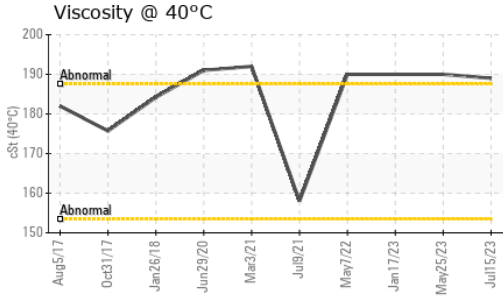

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

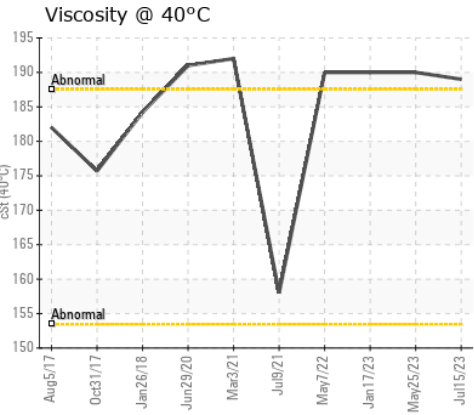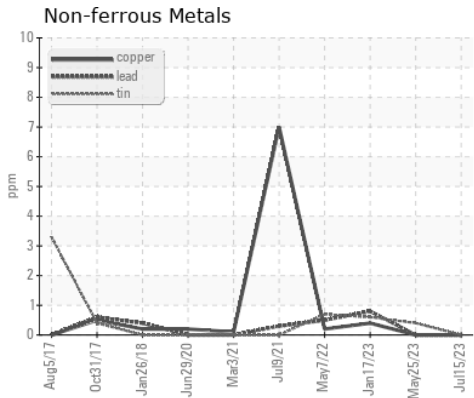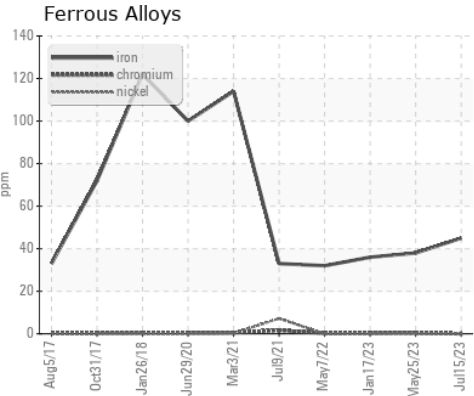

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0746899 **Received** : 20 Jul 2023  
**Lab Number** : **05904012** **Diagnosed** : 24 Jul 2023  
**Unique Number** : 10565368 **Diagnostician** : Don Baldrige  
**Test Package** : CONST

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)