




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

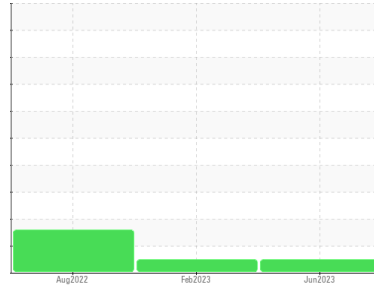

Machine Id
9217385

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		IL05904089	IL05775879	IL05646854
Sample Date	Client Info		14 Jun 2023	23 Feb 2023	05 Aug 2022
Machine Age	mls	Client Info	130038	0	0
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	0.6
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	24	28	61
Chromium	ppm	ASTM D5185m >20	1	1	3
Nickel	ppm	ASTM D5185m >4	<1	<1	<1
Titanium	ppm	ASTM D5185m	<1	0	<1
Silver	ppm	ASTM D5185m >3	0	<1	1
Aluminum	ppm	ASTM D5185m >20	7	18	48
Lead	ppm	ASTM D5185m >40	3	4	6
Copper	ppm	ASTM D5185m >330	2	7	18
Tin	ppm	ASTM D5185m >15	1	2	4
Vanadium	ppm	ASTM D5185m	<1	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	26	8	31
Barium	ppm	ASTM D5185m 10	0	1	0
Molybdenum	ppm	ASTM D5185m 100	51	79	66
Manganese	ppm	ASTM D5185m	1	1	5
Magnesium	ppm	ASTM D5185m 450	584	813	438
Calcium	ppm	ASTM D5185m 3000	1742	1353	1797
Phosphorus	ppm	ASTM D5185m 1150	793	962	943
Zinc	ppm	ASTM D5185m 1350	966	1210	1227
Sulfur	ppm	ASTM D5185m 4250	2851	3163	3176

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	10	14	▲ 43
Sodium	ppm	ASTM D5185m	4	0	5
Potassium	ppm	ASTM D5185m >20	20	48	137

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.6	0.5	0.6
Nitration	Abs/cm	*ASTM D7624 >20	9.9	9.2	10.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.3	21.3	24.1

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	21.3	17.4	20.1
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	8.4	8.2	6.6







OIL ANALYSIS REPORT

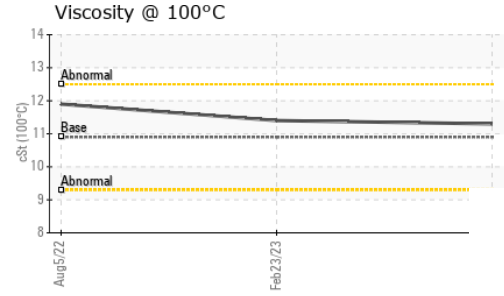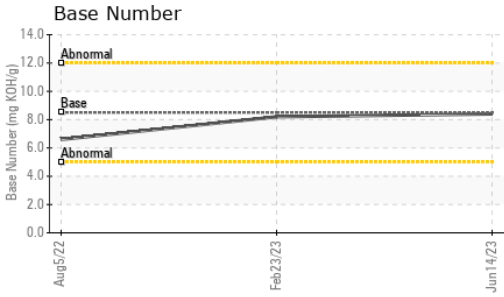

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	11.3	11.4	11.9

GRAPHS

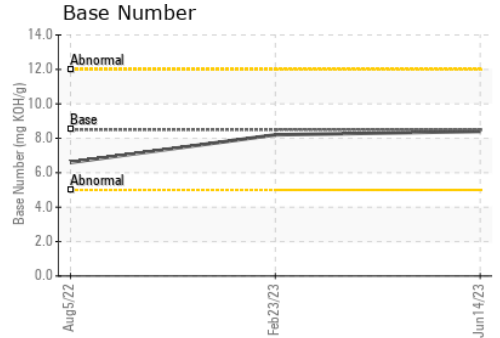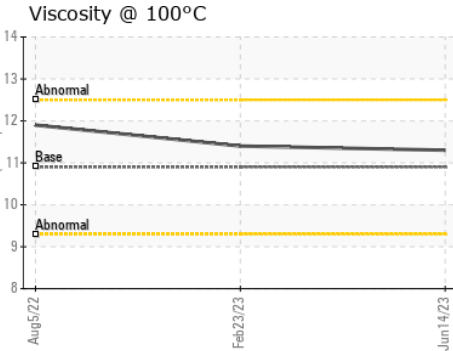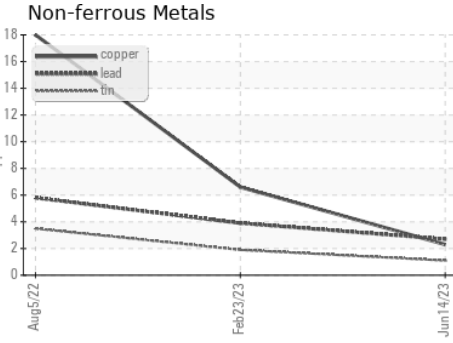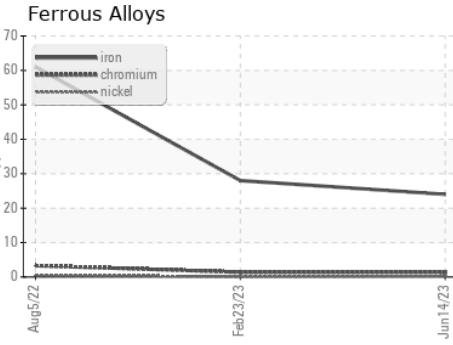

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL05904089 **Received** : 21 Jul 2023
Lab Number : **05904089** **Diagnosed** : 25 Jul 2023
Unique Number : 10565445 **Diagnostician** : Wes Davis
Test Package : FLEET

IDEALEASE-NORCROSS
 4571 NORTH BUFORD HWY
 NORCROSS, GA
 US 30071-2808
 Contact: RICK MARKS

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (770)300-0614