




# OIL ANALYSIS REPORT

Sample Rating Trend

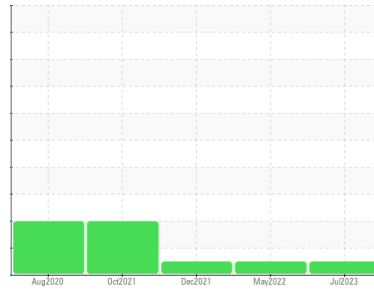

**NORMAL**



Machine Id  
**6818669**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 10W30 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>IL05904093</b>	IL05574714	IL05437717
Sample Date	Client Info			<b>11 Jul 2023</b>	23 May 2022	16 Dec 2021
Machine Age	mls	Client Info		<b>287906</b>	0	0
Oil Age	mls	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>13</b>	47	39
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>5</b>	21	16
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>330	<b>1</b>	2	2
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	0
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>37</b>	24	21
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>48</b>	44	32
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>518</b>	524	632
Calcium	ppm	ASTM D5185m	3000	<b>1760</b>	1647	1227
Phosphorus	ppm	ASTM D5185m	1150	<b>771</b>	676	723
Zinc	ppm	ASTM D5185m	1350	<b>917</b>	919	875
Sulfur	ppm	ASTM D5185m	4250	<b>2843</b>	2265	2794



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>7</b>	9	9
Sodium	ppm	ASTM D5185m		<b>4</b>	14	5
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	41	22

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	1.3	1.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.8</b>	15.3	12.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.0</b>	27.6	27.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>25.6</b>	29.5	22.9
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>8.1</b>	6.3	5.7







# OIL ANALYSIS REPORT

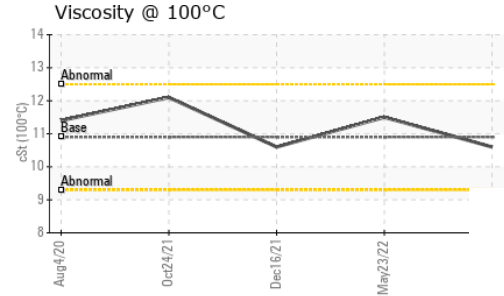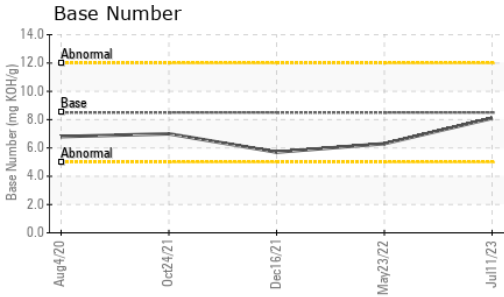

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	<b>10.6</b>	11.5	10.6

### GRAPHS

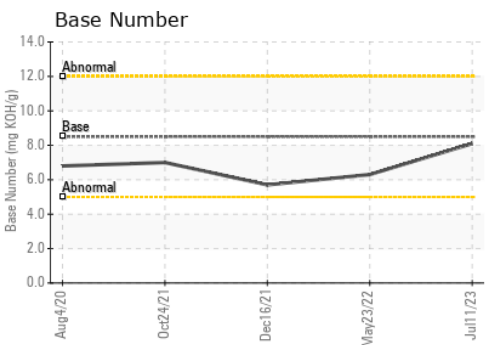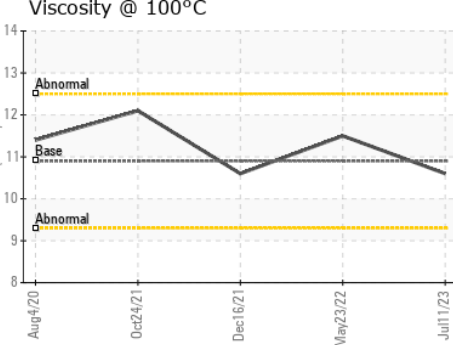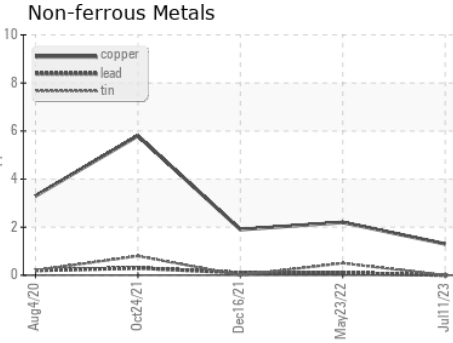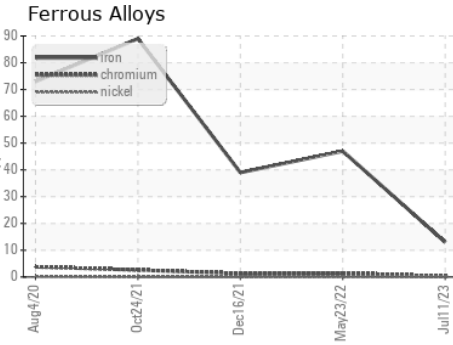

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : IL05904093 **Received** : 21 Jul 2023  
**Lab Number** : **05904093** **Diagnosed** : 26 Jul 2023  
**Unique Number** : 10565449 **Diagnostician** : Angela Borella  
**Test Package** : FLEET

**IDEALEASE-NORCROSS**  
 4571 NORTH BUFORD HWY  
 NORCROSS, GA  
 US 30071-2808  
 Contact: RICK MARKS

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (770)300-0614