




# OIL ANALYSIS REPORT

Sample Rating Trend

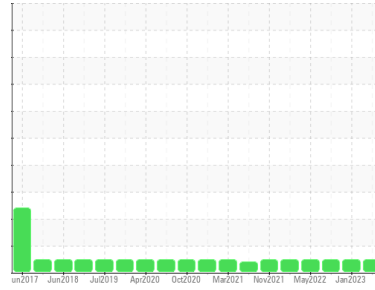

**NORMAL**



Machine Id  
**ISUZU 441269**

Component  
**Front Diesel Engine**

Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (10 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>IL0030430</b>	IL0026604	IL0022937
Sample Date	Client Info		<b>28 Jun 2023</b>	23 Jan 2023	13 Oct 2022
Machine Age	mls	Client Info	<b>441269</b>	121425	118584
Oil Age	mls	Client Info	<b>441269</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>27</b>	21	36
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	1	7
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	2	2
Copper	ppm	ASTM D5185m >330	<b>2</b>	1	1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>5</b>	10	13
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>68</b>	65	54
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m 0	<b>1022</b>	962	775
Calcium	ppm	ASTM D5185m	<b>1270</b>	1312	1377
Phosphorus	ppm	ASTM D5185m	<b>1095</b>	1038	902
Zinc	ppm	ASTM D5185m	<b>1295</b>	1361	1122
Sulfur	ppm	ASTM D5185m	<b>4064</b>	4105	3305

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	4	6
Sodium	ppm	ASTM D5185m	<b>3</b>	1	4
Potassium	ppm	ASTM D5185m >20	<b>0</b>	1	0

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.2</b>	0.6	1.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.6</b>	8.4	10.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.0</b>	18.2	23.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.8</b>	13.3	20.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	<b>10.4</b>	11.6	12.4







# OIL ANALYSIS REPORT

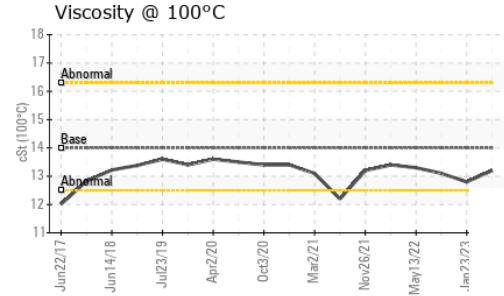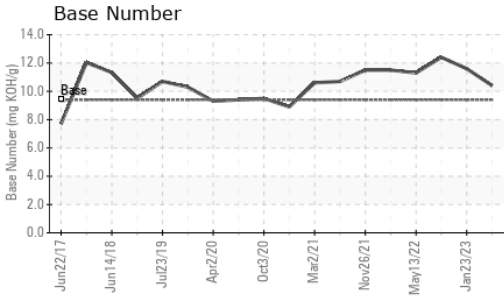

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14	<b>13.2</b>	12.8	13.1

## GRAPHS

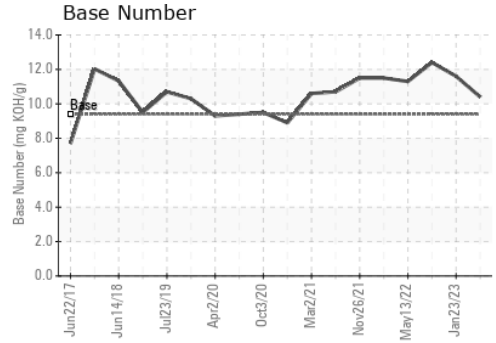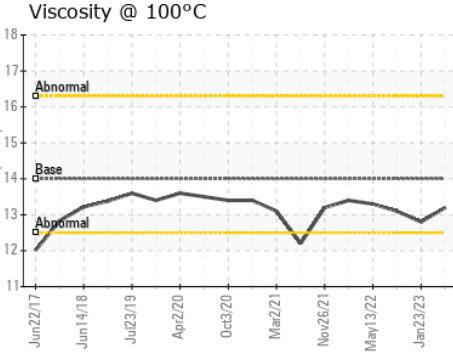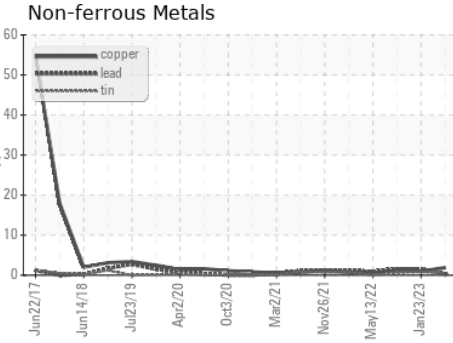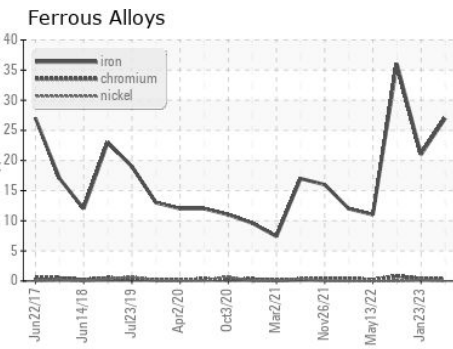

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : IL0030430  
**Lab Number** : 05904108  
**Unique Number** : 10565464  
**Test Package** : FLEET

**RUSH TRUCK LEASING - CHARLOTTE IDEALEASE**  
 1333 AMERON DR  
 CHARLOTTE, NC  
 US 28206  
 Contact: JERRY DIXON  
 dixonj@rushenterprises.com  
 T: (704)333-4507  
 F: (704)333-4508

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)