




PROBLEM SUMMARY


Area
Store 8 - Pikeville [140780]
 Machine Id
KLEEMANN MC100Ri K011.0035
 Component
Hydraulic System
 Fluid
WIRTGEN GROUP HYDRAULIC OIL HVLP 46 (58 GAL)

Sample Rating Trend

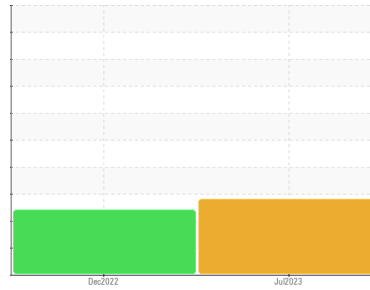

COMPONENT CONDITION SUMMARY

▲ Particle Trend

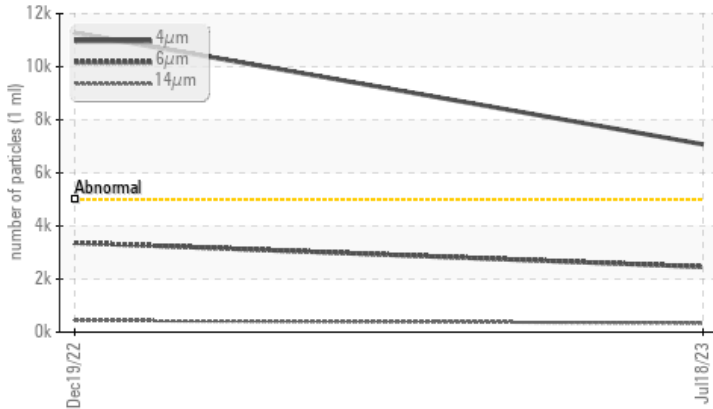

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status	ASTM D7647		ABNORMAL	ABNORMAL	---
Particles >4µm	ASTM D7647	>5000	▲ 7075	▲ 11274	---
Particles >6µm	ASTM D7647	>1300	▲ 2462	▲ 3371	---
Particles >14µm	ASTM D7647	>160	▲ 342	▲ 441	---
Particles >21µm	ASTM D7647	>40	▲ 135	▲ 140	---
Particles >38µm	ASTM D7647	>10	▲ 12	▲ 15	---
Particles >71µm	ASTM D7647	>3	▲ 2	1	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 20/18/16	▲ 21/19/16	---

Customer Id: LESMAROH
 Sample No.: LEC0042255
 Lab Number: 05904284
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

19 Dec 2022 Diag: Don Baldrige

ISO



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report






OIL ANALYSIS REPORT

Sample Rating Trend

ISO

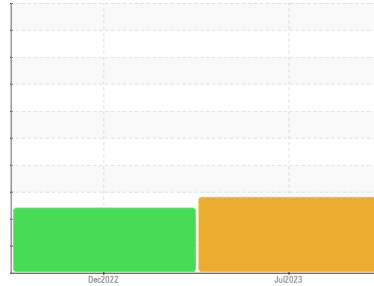

Area
Store 8 - Pikeville [140780]
 Machine Id
KLEEMANN MC100Ri K011.0035

Component
Hydraulic System
 Fluid
WIRTGEN GROUP HYDRAULIC OIL HVLP 46 (58 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oils additive package is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	LEC0042255	LEC0037795	---
Sample Date	Client Info	18 Jul 2023	19 Dec 2022	---
Machine Age	hrs	Client Info	1401	756
Oil Age	hrs	Client Info	1401	756
Oil Changed	Client Info	Not Chngd	Not Chngd	---
Sample Status		ABNORMAL	ABNORMAL	---

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184	12	8	---
Iron	ppm	ASTM D5185m >20	0	<1
Chromium	ppm	ASTM D5185m >10	0	0
Nickel	ppm	ASTM D5185m >10	0	0
Titanium	ppm	ASTM D5185m	<1	0
Silver	ppm	ASTM D5185m	0	0
Aluminum	ppm	ASTM D5185m >10	<1	0
Lead	ppm	ASTM D5185m >10	0	<1
Copper	ppm	ASTM D5185m >75	2	2
Tin	ppm	ASTM D5185m >10	0	0
Vanadium	ppm	ASTM D5185m	<1	0
Cadmium	ppm	ASTM D5185m	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0
Barium	ppm	ASTM D5185m	0	0
Molybdenum	ppm	ASTM D5185m	0	0
Manganese	ppm	ASTM D5185m	<1	0
Magnesium	ppm	ASTM D5185m	<1	0
Calcium	ppm	ASTM D5185m	37	35
Phosphorus	ppm	ASTM D5185m	274	276
Zinc	ppm	ASTM D5185m	350	351
Sulfur	ppm	ASTM D5185m	1100	1132

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	2	3
Sodium	ppm	ASTM D5185m	1	0
Potassium	ppm	ASTM D5185m >20	0	<1






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	▲ 7075	▲ 11274	---
Particles >6µm	ASTM D7647 >1300	▲ 2462	▲ 3371	---
Particles >14µm	ASTM D7647 >160	▲ 342	▲ 441	---
Particles >21µm	ASTM D7647 >40	▲ 135	▲ 140	---
Particles >38µm	ASTM D7647 >10	▲ 12	▲ 15	---
Particles >71µm	ASTM D7647 >3	▲ 2	▲ 1	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	▲ 20/18/16	▲ 21/19/16	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.31	0.34


OIL ANALYSIS REPORT

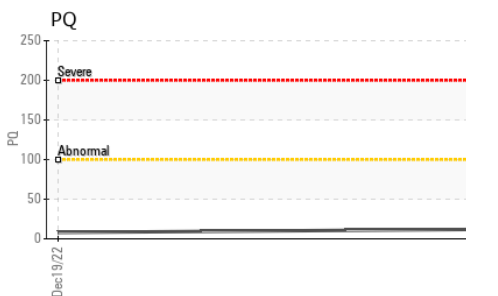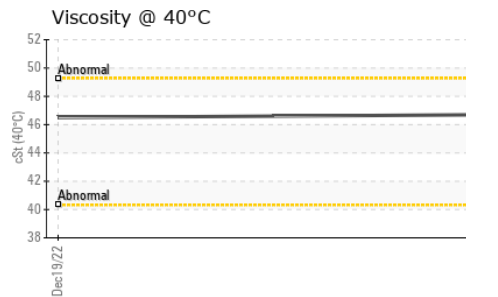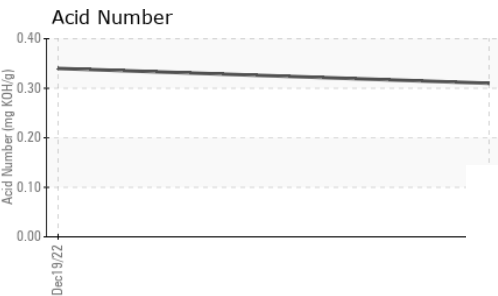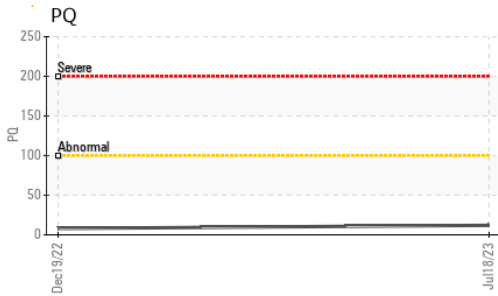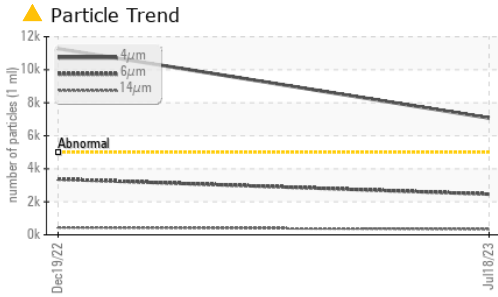





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.7	46.5	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

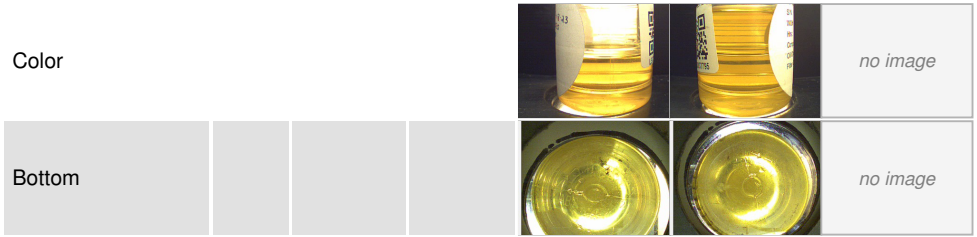

GRAPHS

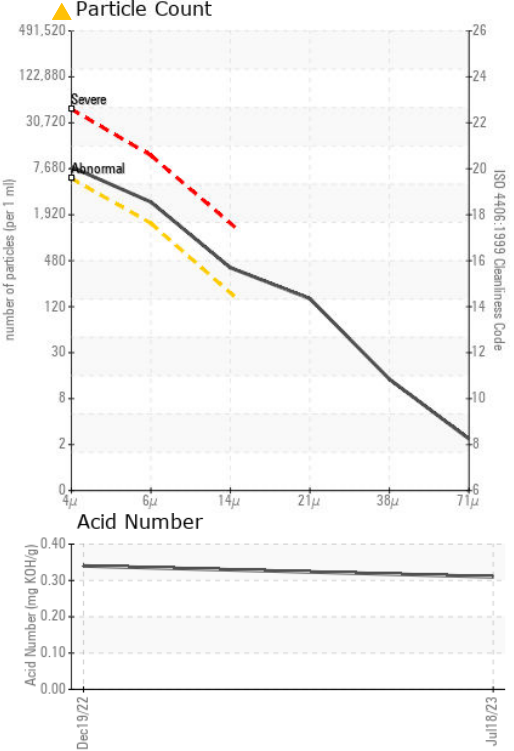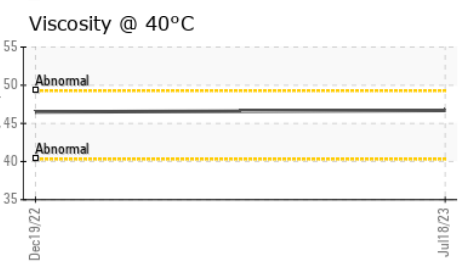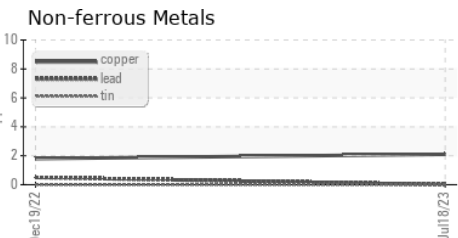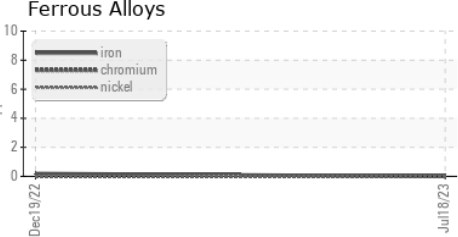

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0042255 **Received** : 21 Jul 2023
Lab Number : 05904284 **Diagnosed** : 02 Aug 2023
Unique Number : 10565640 **Diagnostician** : Jonathan Hester
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)