




OIL ANALYSIS REPORT

Sample Rating Trend

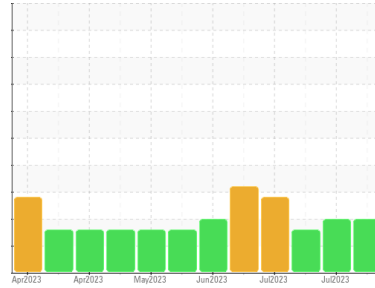

ISO



Area
RIG 879
 Machine Id
R879-P-01

Component
Pump Drive
 Fluid
BRENNTAG COASTAL CHEMICAL HBC GEAR OIL 320 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0011969	KL0011973	KL0011976
Sample Date	Client Info		17 Jul 2023	13 Jul 2023	11 Jul 2023
Machine Age	days	Client Info	45129	45120	45118
Oil Age	days	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	21	69	76
Chromium	ppm	ASTM D5185m >15	0	<1	<1
Nickel	ppm	ASTM D5185m >10	0	0	<1
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >20	2	7	8
Lead	ppm	ASTM D5185m	0	0	0
Copper	ppm	ASTM D5185m >35	2	3	3
Tin	ppm	ASTM D5185m >4	0	0	0
Vanadium	ppm	ASTM D5185m	<1	<1	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	4	0	0
Barium	ppm	ASTM D5185m	0	5	0
Molybdenum	ppm	ASTM D5185m	4	11	11
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	6	11	13
Calcium	ppm	ASTM D5185m	103	230	244
Phosphorus	ppm	ASTM D5185m	113	48	53
Zinc	ppm	ASTM D5185m	33	32	29
Sulfur	ppm	ASTM D5185m	10570	10299	10608

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	17	38	40
Sodium	ppm	ASTM D5185m	97	245	265
Potassium	ppm	ASTM D5185m >20	0	1	6

FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 247903	▲ 306528	214865
Particles >6µm	ASTM D7647	>5000	▲ 92874	▲ 158543	▲ 133002
Particles >14µm	ASTM D7647	>640	▲ 2357	▲ 4638	▲ 5463
Particles >21µm	ASTM D7647	>160	▲ 429	▲ 819	▲ 754
Particles >38µm	ASTM D7647	>40	14	25	6
Particles >71µm	ASTM D7647	>10	1	3	0
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 25/24/18	▲ 25/24/19	▲ 24/20

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.19	0.17	0.08



OIL ANALYSIS REPORT

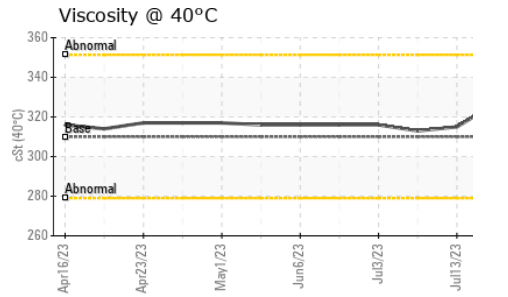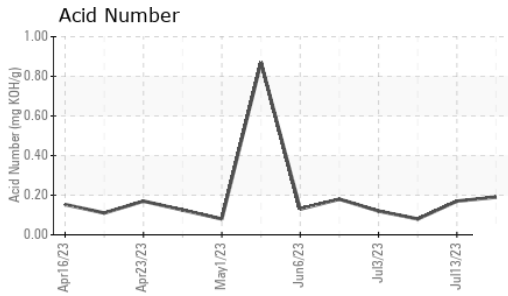
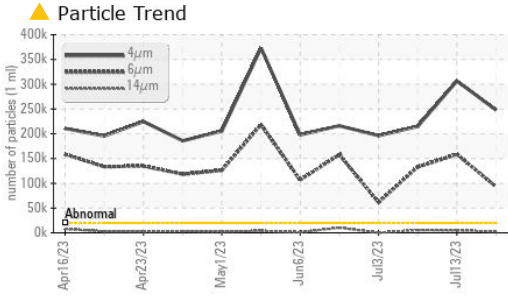
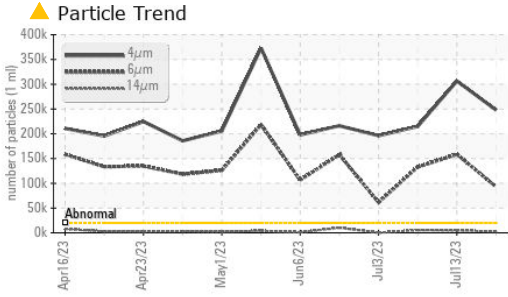


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	310	327	315

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

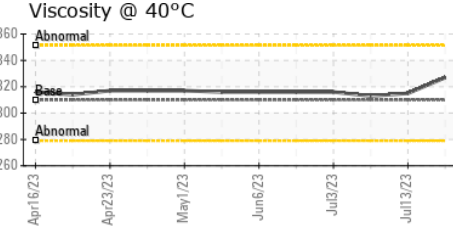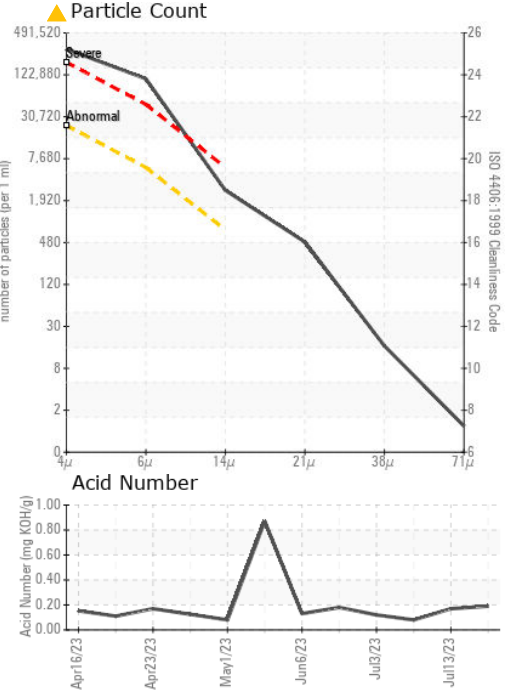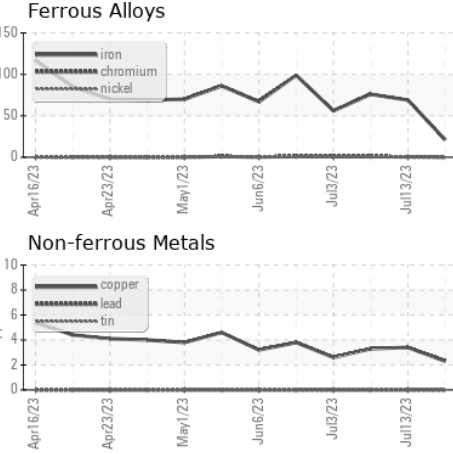

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0011969 **Received** : 21 Jul 2023
Lab Number : 05904313 **Diagnosed** : 24 Jul 2023
Unique Number : 10565669 **Diagnostician** : Doug Bogart
Test Package : MOB 2 (Additional Tests: PrtCount)

PATTERSON - UTI DRILLING
 9915 WEST INDUSTRIAL
 MIDLAND, TX
 US 79706
 Contact: MICHEAL EASTMAN
 micheal.eastman@patenergy.com
 T: (325)716-8686
 F: (432)561-9388

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)