




OIL ANALYSIS REPORT



Area
KANSAS/44/EG - EXCAVATOR
 Machine Id
20.24W [KANSAS^44^EG - EXCAVATOR]
 Component
Rear Left Final Drive
 Fluid
MOBIL MOBILTRANS HD 50 (--- GAL)

Sample Rating Trend

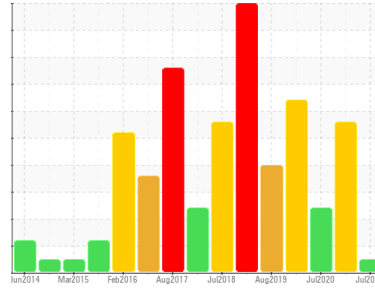

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0832383	WC0564876	WC0453782
Sample Date	Client Info		11 Jul 2023	06 May 2021	08 Jul 2020
Machine Age	hrs	Client Info	7114	6255	5782
Oil Age	hrs	Client Info	5782	0	0
Oil Changed	Client Info		N/A	Not Changd	Changed
Sample Status			NORMAL	SEVERE	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >800	199	405	367
Chromium	ppm	ASTM D5185m >10	2	3	3
Nickel	ppm	ASTM D5185m >5	1	2	2
Titanium	ppm	ASTM D5185m >15	2	7	4
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >75	24	▲ 108	▲ 56
Lead	ppm	ASTM D5185m >10	<1	<1	<1
Copper	ppm	ASTM D5185m >75	<1	1	1
Tin	ppm	ASTM D5185m >8	0	0	0
Antimony	ppm	ASTM D5185m >50	---	0	0
Vanadium	ppm	ASTM D5185m	0	<1	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	4	3	4
Barium	ppm	ASTM D5185m	2	<1	<1
Molybdenum	ppm	ASTM D5185m	<1	<1	<1
Manganese	ppm	ASTM D5185m	2	4	3
Magnesium	ppm	ASTM D5185m	15	40	21
Calcium	ppm	ASTM D5185m	3250	3254	3167
Phosphorus	ppm	ASTM D5185m	1106	1008	1007
Zinc	ppm	ASTM D5185m	1313	1204	1236
Sulfur	ppm	ASTM D5185m	7782	11918	11681

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >400	158	◆ 436	▲ 275
Sodium	ppm	ASTM D5185m	0	9	8
Potassium	ppm	ASTM D5185m >20	11	38	23

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	MODER	LIGHT
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG



OIL ANALYSIS REPORT

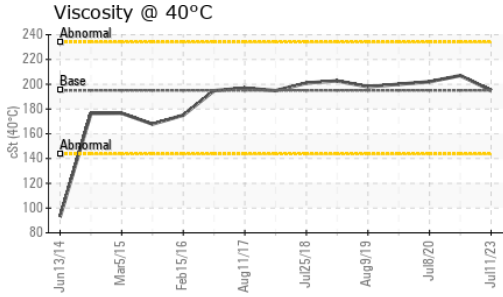




FLUID PROPERTIES	method	limit/base	current	history1	history2
------------------	--------	------------	---------	----------	----------

Visc @ 40°C	cSt	ASTM D445	195	195	207	202
-------------	-----	-----------	-----	------------	-----	-----

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

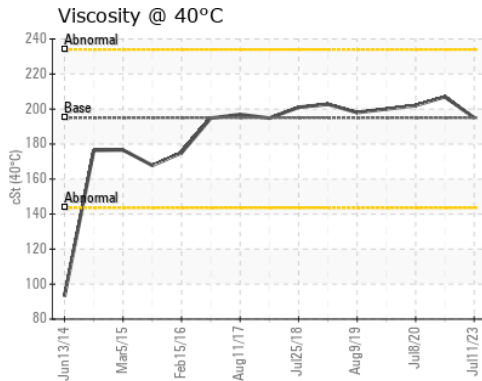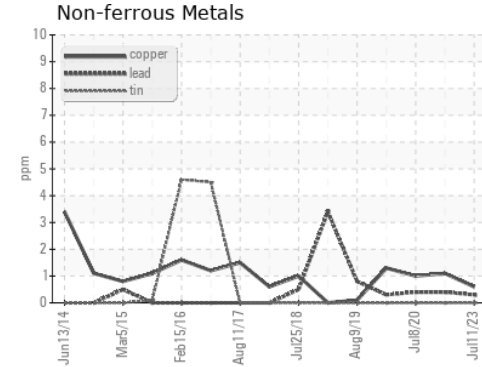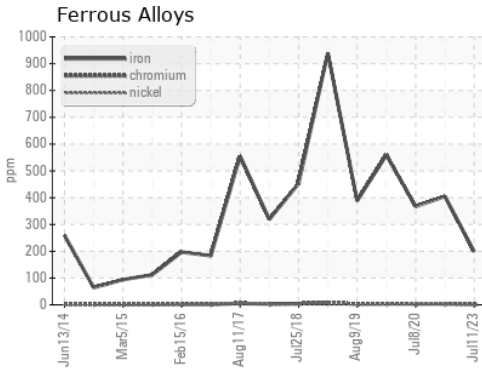

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0832383
Lab Number : 05904639
Unique Number : 10565995
Test Package : CONST

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)