




OIL ANALYSIS REPORT

Sample Rating Trend

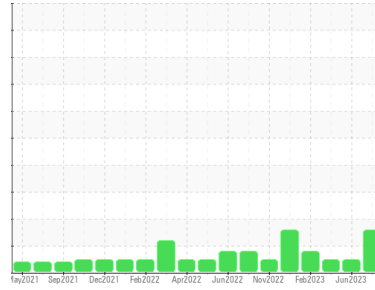

ISO



Area
GUAY SON/Yavaros [CONHER]
 Machine Id
Pacifico Ind - Admiralty HS

Component
Hydraulic System
 Fluid
QUAKER STATE DUPLEX AW HYDRAULIC 68 (1400 LTR)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0012397	KL0012376	KL0012348
Sample Date	Client Info		08 Jul 2023	02 Jun 2023	26 Apr 2023
Machine Age	mths	Client Info	33	32	30
Oil Age	mths	Client Info	33	32	30
Oil Changed	Client Info		Not Changed	Not Changed	Not Changed
Sample Status			ABNORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	2	<1	1
Chromium	ppm	ASTM D5185m >10	0	0	0
Nickel	ppm	ASTM D5185m >10	0	0	<1
Titanium	ppm	ASTM D5185m	0	<1	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >10	0	<1	0
Lead	ppm	ASTM D5185m >10	<1	0	<1
Copper	ppm	ASTM D5185m >75	4	3	3
Tin	ppm	ASTM D5185m >10	0	0	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 4.0	0	0	0
Barium	ppm	ASTM D5185m 0.0	2	0	0
Molybdenum	ppm	ASTM D5185m 0.0	0	0	<1
Manganese	ppm	ASTM D5185m	0	0	<1
Magnesium	ppm	ASTM D5185m 0.1	2	0	4
Calcium	ppm	ASTM D5185m 54	26	21	21
Phosphorus	ppm	ASTM D5185m 272	151	146	154
Zinc	ppm	ASTM D5185m 357	183	154	165
Sulfur	ppm	ASTM D5185m 2434	1660	1655	1755

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<1	<1	<1
Sodium	ppm	ASTM D5185m	0	<1	5
Potassium	ppm	ASTM D5185m >20	<1	0	2

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		130238	5490	5488
Particles >6µm	ASTM D7647	>1300	▲ 46333	1045	988
Particles >14µm	ASTM D7647	>160	▲ 2853	45	32
Particles >21µm	ASTM D7647	>40	▲ 545	9	8
Particles >38µm	ASTM D7647	>10	10	1	1
Particles >71µm	ASTM D7647	>3	0	0	1
Oil Cleanliness	ISO 4406 (c)	>17/14	▲ 23/19	17/13	17/12


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.5	0.15	0.12	0.14




OIL ANALYSIS REPORT


▲ Particle Trend

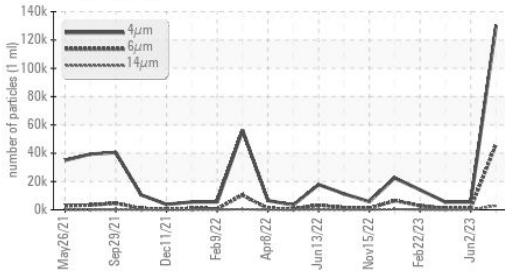


▲ Particle Trend

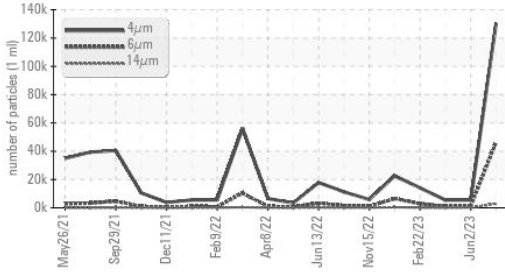

Acid Number

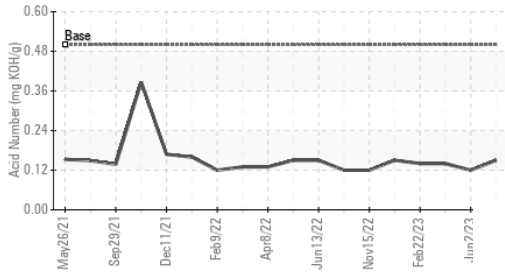


Viscosity @ 40°C

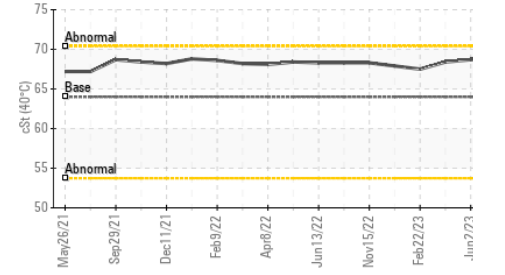

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 64	68.8	68.7	68.4

SAMPLE IMAGES

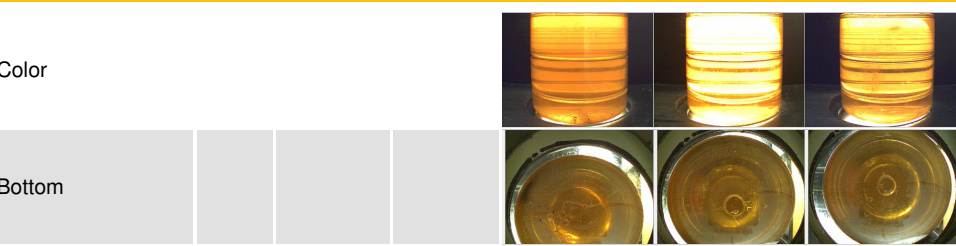


GRAPHS


Ferrous Alloys

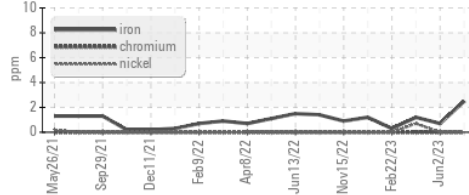


Non-ferrous Metals

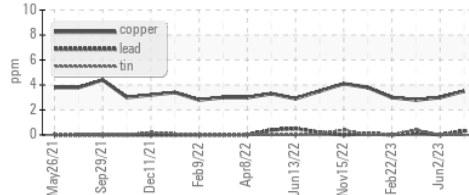


Viscosity @ 40°C

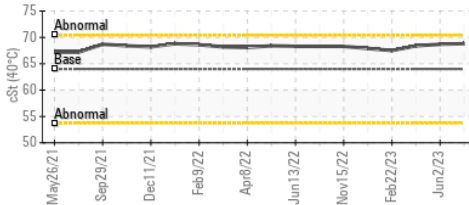

▲ Particle Count

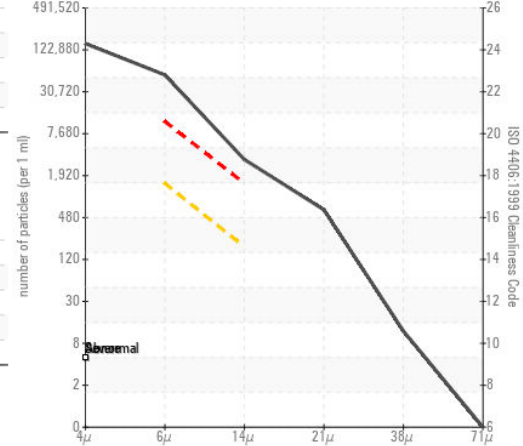

Acid Number

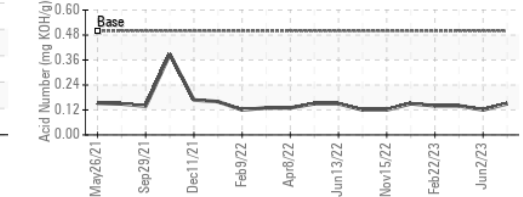

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : KL0012397
 Lab Number : 05904898
 Unique Number : 10566254
 Test Package : MOB 2

Received : 21 Jul 2023
 Diagnosed : 25 Jul 2023
 Diagnostician : Don Baldrige

CONOR
 JUAREZ 348
 HERMOSILLO,
 MX 83140
 Contact: EDUARDO GARCIA
 egarcia.comsa@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (526)622-1581 x:81
 F: x: