




OIL ANALYSIS REPORT

Sample Rating Trend

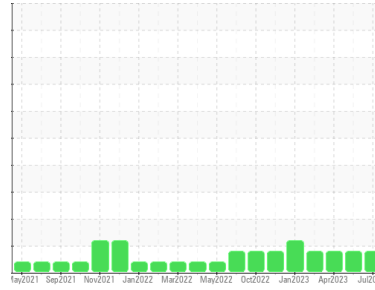

ISO



Area
GUAY SON/Yavaros [CONHER]
 Machine Id
Pacifico Ind - Azteca HS

Component
Hydraulic System
 Fluid
QUAKER STATE DUPLEX AW HYDRAULIC 68 (1200 LTR)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	KL0012405	KL0012377	KL0012349	
Sample Date	Client Info	14 Jul 2023	03 Jun 2023	26 Apr 2023	
Machine Age	hrs	Client Info	0	0	
Oil Age	hrs	Client Info	6554	5570	4658
Oil Changed	Client Info	Not Changed	Not Changed	Not Changed	
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL	

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >20	1	<1	1
Chromium	ppm	ASTM D5185m >10	0	0	0
Nickel	ppm	ASTM D5185m >10	0	0	<1
Titanium	ppm	ASTM D5185m	0	<1	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >10	0	<1	0
Lead	ppm	ASTM D5185m >10	<1	0	1
Copper	ppm	ASTM D5185m >75	8	6	6
Tin	ppm	ASTM D5185m >10	<1	0	1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 4.0	0	0	0
Barium	ppm	ASTM D5185m 0.0	2	0	0
Molybdenum	ppm	ASTM D5185m 0.0	<1	0	<1
Manganese	ppm	ASTM D5185m	0	0	<1
Magnesium	ppm	ASTM D5185m 0.1	1	0	3
Calcium	ppm	ASTM D5185m 54	49	46	43
Phosphorus	ppm	ASTM D5185m 272	210	211	225
Zinc	ppm	ASTM D5185m 357	271	252	273
Sulfur	ppm	ASTM D5185m 2434	1660	1780	1948

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >20	<1	<1	<1
Sodium	ppm	ASTM D5185m	0	1	5
Potassium	ppm	ASTM D5185m >20	<1	0	2

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	34145	33013	36678
Particles >6µm	ASTM D7647 >1300	▲ 3722	▲ 3645	▲ 3887
Particles >14µm	ASTM D7647 >160	89	62	41
Particles >21µm	ASTM D7647 >40	24	12	4
Particles >38µm	ASTM D7647 >10	1	2	0
Particles >71µm	ASTM D7647 >3	0	0	0
Oil Cleanliness	ISO 4406 (c) >17/14	▲ 19/14	▲ 19/13	▲ 19/13


FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.5	0.20	0.17	0.21




OIL ANALYSIS REPORT


▲ Particle Trend

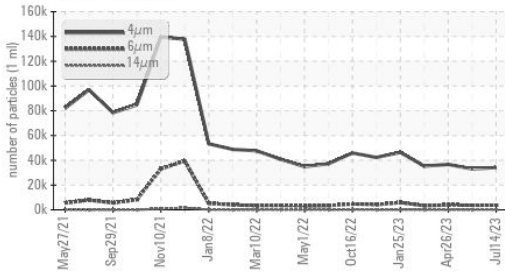


▲ Particle Trend

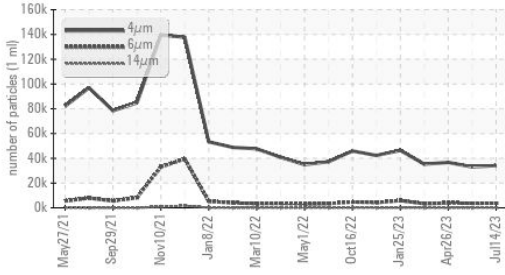

Acid Number

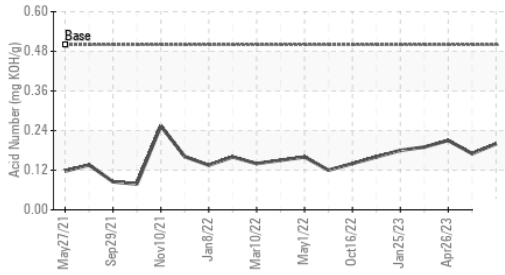


Viscosity @ 40°C

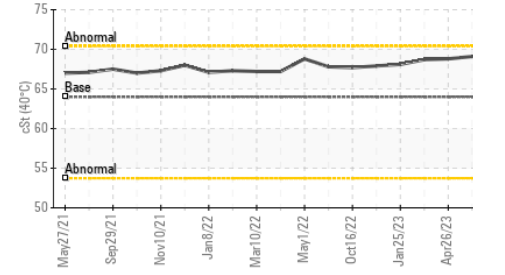

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 64	69.3	69.1	68.8

SAMPLE IMAGES

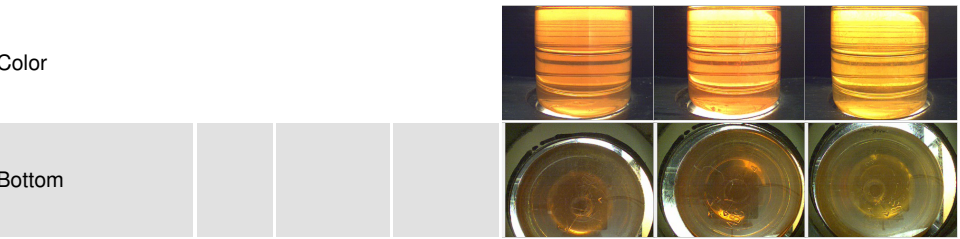


GRAPHS


Ferrous Alloys

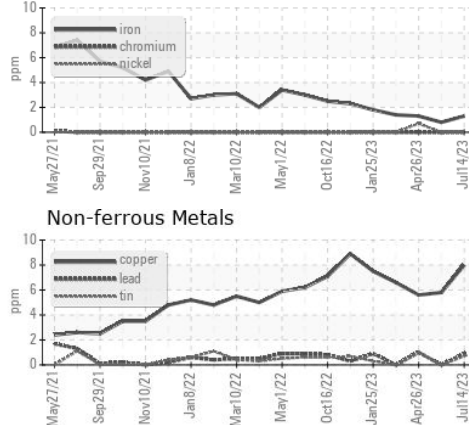


Non-ferrous Metals

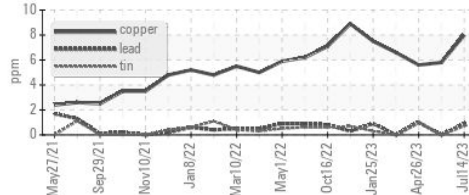


Viscosity @ 40°C

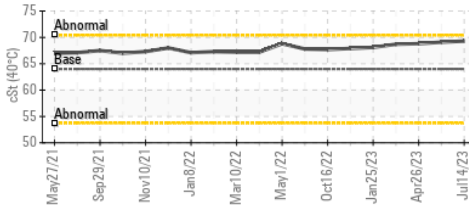

▲ Particle Count

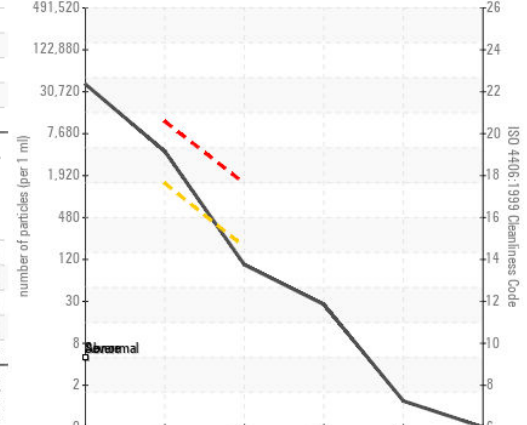

Acid Number

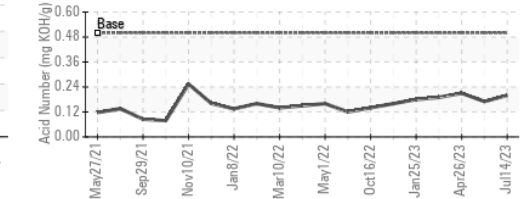

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : KL0012405 Received : 21 Jul 2023
 Lab Number : 05904899 Diagnosed : 25 Jul 2023
 Unique Number : 10566255 Diagnostician : Don Baldrige
 Test Package : MOB 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CONOR
 JUAREZ 348
 HERMOSILLO,
 MX 83140

Contact: EDUARDO GARCIA
 egarcia.comsa@gmail.com

T: (526)622-1581 x:81

F: x: