

PROBLEM SUMMARY

Sample Rating Trend


ISO

KAESER AS 20T 6486764 (S/N 1092)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

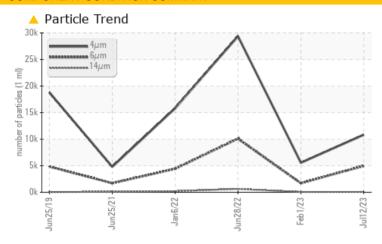

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TE	ST RESULTS				
Sample Status			ABNORMAL	ATTENTION	ABNORMAL
Particles >6μm	ASTM D7647	>1300	4969	<u>▲</u> 1710	△ 10096
Oil Cleanliness	ISO 4406 (c)	>/17/13	21/19/13	20/18/13	22/21/16

Customer Id: UNIMED Sample No.: KC109398 Lab Number: 05904934 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid			?	Oil and filter change at the time of sampling has been noted.
Change Filter			?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

01 Feb 2023 Diag: Doug Bogart





No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



28 Jun 2022 Diag: Don Baldridge

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



06 Jan 2022 Diag: Don Baldridge

ISO




No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

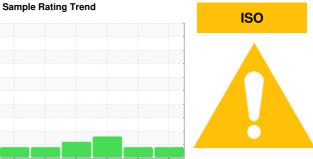

KAESER AS 20T 6486764 (S/N 1092)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Jun 2019	Jun2021 Jan2022	Jun2022 Feb2023	Jul2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC109398	KC101616	KC95213
Sample Date		Client Info		12 Jul 2023	01 Feb 2023	28 Jun 2022
Machine Age	hrs	Client Info		14017	12879	11210
Oil Age	hrs	Client Info		2800	1600	2852
Oil Changed		Client Info		Changed	Not Changd	Changed
Sample Status				ABNORMAL	ATTENTION	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	6	3	5
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	0	40	18
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	100	10	52	30
Calcium	ppm	ASTM D5185m	0	0	2	1
Phosphorus	ppm	ASTM D5185m	0	0	2	5
Zinc	ppm	ASTM D5185m	0	6	10	12
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	9	8	5
Sodium	ppm	ASTM D5185m		5	29	14
Potassium	ppm	ASTM D5185m	>20	<1	5	<1
Water	%	ASTM D6304	>0.05	0.007	0.007	0.019
ppm Water	ppm	ASTM D6304	>500	74.7	70.9	198.2
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		10831	5559	29376
Particles >6µm		ASTM D7647	>1300	4969	<u>▲</u> 1710	△ 10096
Particles >14μm		ASTM D7647	>80	69	57	△ 632
Particles >21µm		ASTM D7647	>20	6	8	<u> 111</u>
Particles >38μm		ASTM D7647	>4	0	0	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 21/19/13	2 0/18/13	<u>△</u> 22/21/16
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.37	0.34	0.31



OIL ANALYSIS REPORT

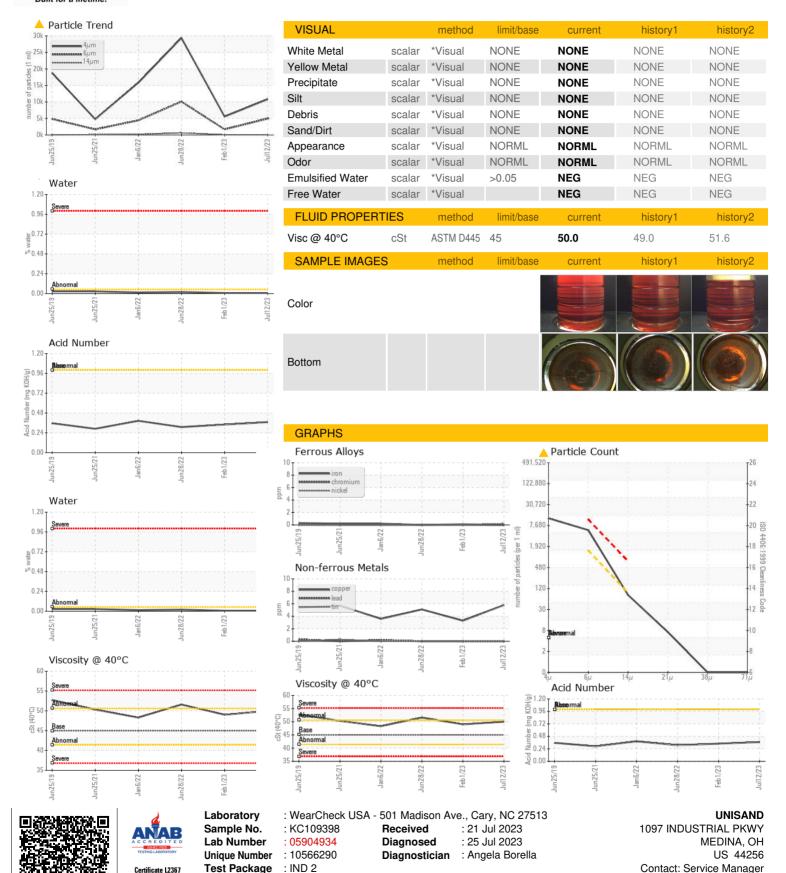

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: