




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

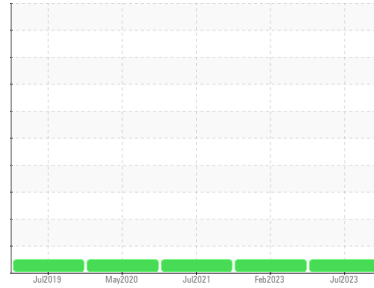

Machine Id  
**KENWORTH T-880 T-792 (S/N 1NKZXPEX1HJ176562)**

Component  
**Diesel Engine**

Fluid  
**DURALENE Dura-Max 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>WC0804167</b>   | WC0693455   | WC0517988   |
| Sample Date        | Client Info |             |            | <b>12 Jul 2023</b> | 17 Feb 2023 | 23 Jul 2021 |
| Machine Age        | mls         | Client Info |            | <b>0</b>           | 232565      | 155656      |
| Oil Age            | mls         | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Changed        | Client Info |             |            | <b>Changed</b>     | Changed     | Changed     |
| Sample Status      |             |             |            | <b>NORMAL</b>      | NORMAL      | NORMAL      |

| CONTAMINATION |           | method | limit/base | current        | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel          | WC Method | >5     |            | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Glycol        | WC Method |        |            | <b>NEG</b>     | NEG      | NEG      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >100       | <b>26</b>    | 21       | 17       |
| Chromium    | ppm | ASTM D5185m | >20        | <b>&lt;1</b> | <1       | <1       |
| Nickel      | ppm | ASTM D5185m | >4         | <b>0</b>     | <1       | 0        |
| Titanium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | <1       |
| Silver      | ppm | ASTM D5185m | >3         | <b>0</b>     | 0        | 0        |
| Aluminum    | ppm | ASTM D5185m | >20        | <b>5</b>     | 3        | 4        |
| Lead        | ppm | ASTM D5185m | >40        | <b>&lt;1</b> | <1       | <1       |
| Copper      | ppm | ASTM D5185m | >330       | <b>2</b>     | <1       | 1        |
| Tin         | ppm | ASTM D5185m | >15        | <b>&lt;1</b> | <1       | <1       |
| Antimony    | ppm | ASTM D5185m |            | <b>---</b>   | ---      | 0        |
| Vanadium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | 0        |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |

| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m |            | <b>0</b>     | <1       | 6        |
| Barium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm | ASTM D5185m |            | <b>4</b>     | 3        | 3        |
| Manganese  | ppm | ASTM D5185m |            | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm | ASTM D5185m |            | <b>51</b>    | 50       | 53       |
| Calcium    | ppm | ASTM D5185m |            | <b>2531</b>  | 2223     | 2600     |
| Phosphorus | ppm | ASTM D5185m |            | <b>960</b>   | 840      | 974      |
| Zinc       | ppm | ASTM D5185m |            | <b>1150</b>  | 1030     | 1130     |
| Sulfur     | ppm | ASTM D5185m |            | <b>4516</b>  | 3541     | 3446     |



| CONTAMINANTS |     | method      | limit/base | current  | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >25        | <b>7</b> | 5        | 4        |
| Sodium       | ppm | ASTM D5185m |            | <b>2</b> | <1       | 1        |
| Potassium    | ppm | ASTM D5185m | >20        | <b>4</b> | 4        | 9        |

| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 | >3         | <b>0.7</b>  | 0.5      | 0.6      |
| Nitration | Abs/cm   | *ASTM D7624 | >20        | <b>9.5</b>  | 9.4      | 9.2      |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30        | <b>23.3</b> | 23.3     | 22.5     |

| FLUID DEGRADATION |          | method      | limit/base | current     | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation         | Abs/.1mm | *ASTM D7414 | >25        | <b>14.5</b> | 14.2     | 12.6     |
| Base Number (BN)  | mg KOH/g | ASTM D2896  |            | <b>5.7</b>  | 5.7      | 6.1      |







# OIL ANALYSIS REPORT

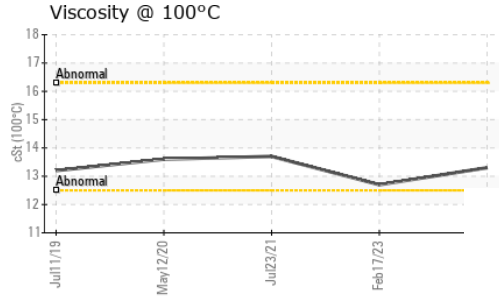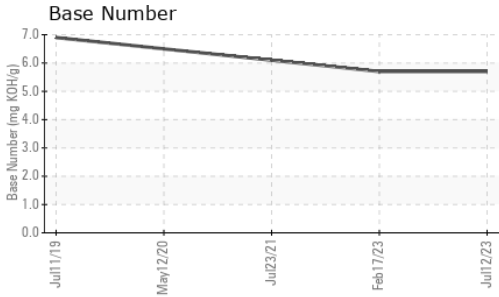

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current     | history1 | history2 |
|------------------|--------|------------|-------------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | <b>13.3</b> | 12.7     | 13.7     |

### GRAPHS

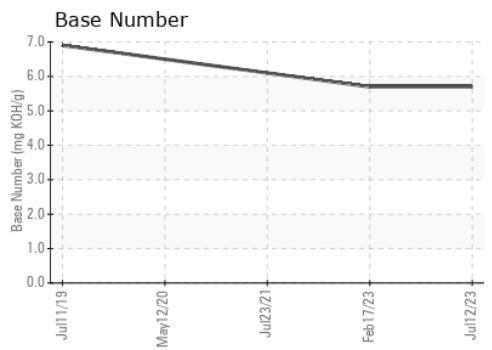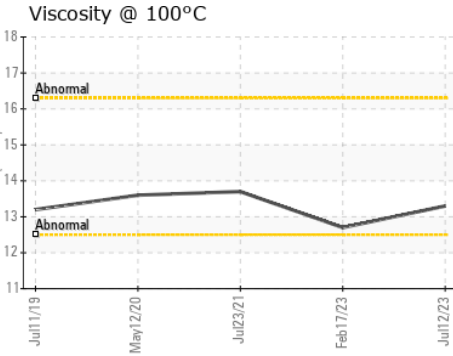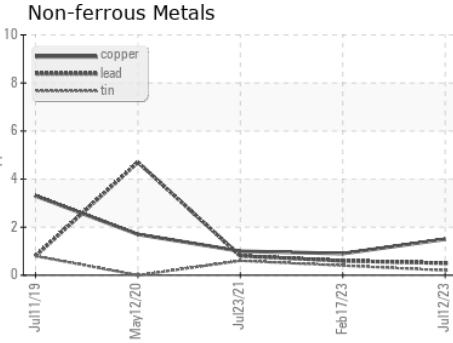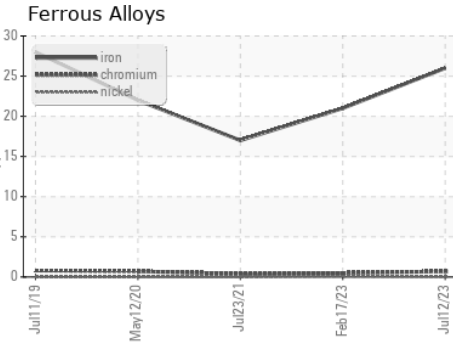

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0804167 **Received** : 24 Jul 2023  
**Lab Number** : **05905134** **Diagnosed** : 24 Jul 2023  
**Unique Number** : 10566490 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**EAI EQUIPMENT A DIV OF PLEASANT CONSTRUCTION INC**  
 24024 FREDERICK ROAD  
 CLARKSBURG, MD  
 US 20871  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: