




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

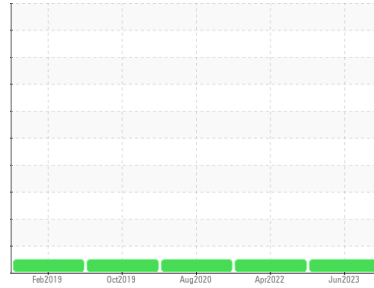

Machine Id
KENWORTH T-880 T-793 (S/N 1NKZXPEX3HJ176563)

Component
Diesel Engine

Fluid
DURALENE Dura-Max 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0804168	WC0686794	WC0456810
Sample Date	Client Info			28 Jun 2023	09 Apr 2022	11 Aug 2020
Machine Age	mls	Client Info		221795	177457	124689
Oil Age	mls	Client Info		0	0	0
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	19	19	3
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	2
Aluminum	ppm	ASTM D5185m	>20	9	4	0
Lead	ppm	ASTM D5185m	>40	<1	2	<1
Copper	ppm	ASTM D5185m	>330	56	11	<1
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	5	6
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		6	5	6
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		55	63	79
Calcium	ppm	ASTM D5185m		2410	2364	2163
Phosphorus	ppm	ASTM D5185m		897	916	886
Zinc	ppm	ASTM D5185m		1079	1062	948
Sulfur	ppm	ASTM D5185m		4051	3428	3253



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	6	3
Sodium	ppm	ASTM D5185m		38	33	2
Potassium	ppm	ASTM D5185m	>20	22	10	4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6	0.9	0.1
Nitration	Abs/cm	*ASTM D7624	>20	9.7	11.9	7
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.4	28.3	17

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.4	17.9	10
Base Number (BN)	mg KOH/g	ASTM D2896		6.1	5.6	8







OIL ANALYSIS REPORT

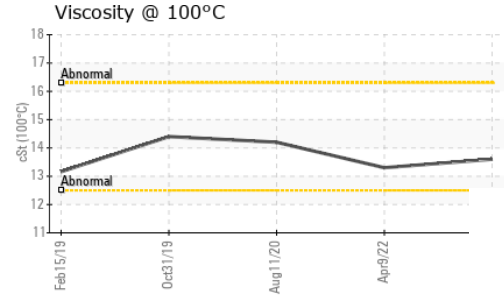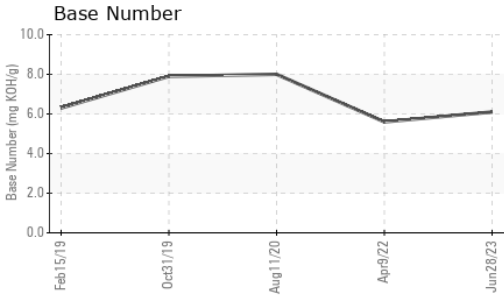

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.6	13.3	14.2

GRAPHS

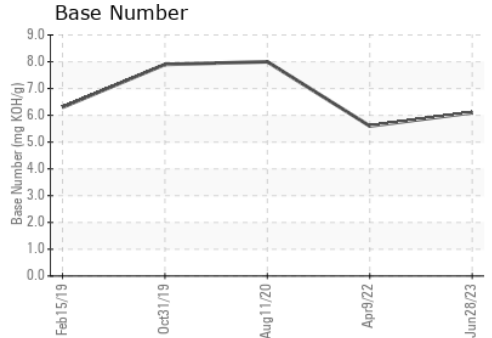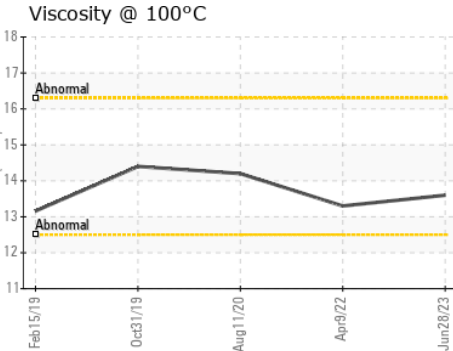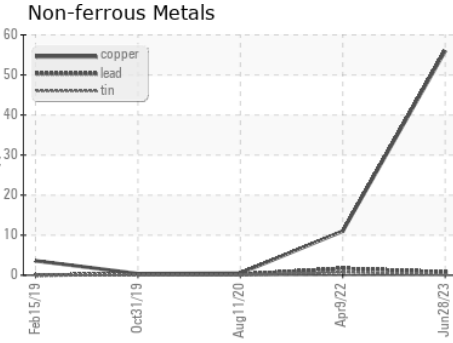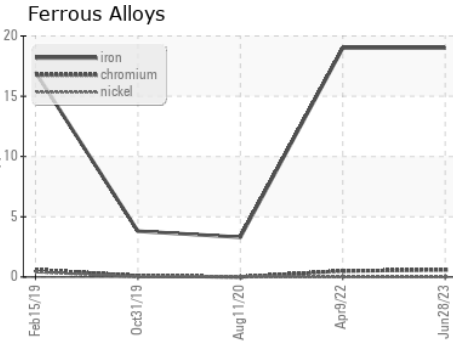

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0804168 **Received** : 24 Jul 2023
Lab Number : 05905136 **Diagnosed** : 24 Jul 2023
Unique Number : 10566492 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: TBN)

EAI EQUIPMENT A DIV OF PLEASANT CONSTRUCTION INC
 24024 FREDERICK ROAD
 CLARKSBURG, MD
 US 20871
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: