

OIL ANALYSIS REPORT

SAMPLE INFORMA

Sample Rating Trend

NORMAL

Machine Id

KENWORTH T880 T-887 (S/N 1XKZD40X3PJ225506)

Component

Diesel Engine

DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

506)	
RT Sample Hating Trend	

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0804169		
Sample Date		Client Info		11 Jul 2023		
Machine Age	mls	Client Info		70188		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINATION	١	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Glycol		WC Method		NEG		
-		mothod	limit/bass	OLIKKO OT	history	hiotomyO
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	27		
Chromium	ppm	ASTM D5185m	>20	3		
Nickel	ppm	ASTM D5185m	>4	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>20	21		
Lead	ppm	ASTM D5185m	>40	2		
Copper	ppm	ASTM D5185m	>330	3		
Tin	ppm	ASTM D5185m	>15	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		ام مطلم مص	lineit/lesses		Introduction of	history2
ADDITIVES		method	limit/base	current	history1	HISTOLYZ
Boron	ppm	ASTM D5185m	250	current	nistory i	
	ppm				•	,
Boron	• •	ASTM D5185m	250	0		
Boron Barium	ppm	ASTM D5185m ASTM D5185m	250 10	0 0		
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	250 10	0 0 4		
Boron Barium Molybdenum Manganese	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	250 10 100	0 0 4 1		
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	250 10 100 450	0 0 4 1 59		
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	250 10 100 450 3000	0 0 4 1 59 2502		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	250 10 100 450 3000 1150	0 0 4 1 59 2502 939		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	250 10 100 450 3000 1150	0 0 4 1 59 2502 939 1110		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	250 10 100 450 3000 1150 1350 4250	0 0 4 1 59 2502 939 1110 4313		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	250 10 100 450 3000 1150 1350 4250 limit/base >25	0 0 4 1 59 2502 939 1110 4313	 history1	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	250 10 100 450 3000 1150 1350 4250 limit/base >25 >158	0 0 4 1 59 2502 939 1110 4313 current	 history1	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	250 10 100 450 3000 1150 1350 4250 limit/base >25 >158	0 0 4 1 59 2502 939 1110 4313 current	 history1	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	250 10 100 450 3000 1150 1350 4250 limit/base >25 >158 >20 limit/base	0 0 4 1 59 2502 939 1110 4313 current 10 7 48	history1	history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	250 10 100 450 3000 1150 1350 4250 limit/base >25 >158 >20 limit/base >3	0 0 4 1 59 2502 939 1110 4313 current 10 7 48 current 0.4	history1 history1	history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	250 10 100 450 3000 1150 1350 4250 limit/base >25 >158 >20 limit/base >3	0 0 4 1 59 2502 939 1110 4313 current 10 7 48	history1 history1	history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m Method ASTM D5185m ASTM D7844 *ASTM D7624 *ASTM D7415	250 10 100 450 3000 1150 1350 4250 limit/base >25 >158 >20 limit/base >3 >20 >30	0 0 4 1 59 2502 939 1110 4313 current 10 7 48 current 0.4 8.7 23.1	history1 history1	history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation FLUID DEGRADA	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m Method *ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method *ASTM D7844 *ASTM D7624 *ASTM D7415 Method	250 10 100 450 3000 1150 1350 4250 limit/base >25 >158 >20 limit/base >3 >20 >30 limit/base	0 0 4 1 59 2502 939 1110 4313 current 10 7 48 current 0.4 8.7 23.1 current	history1 history1 history1	history2 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m Method ASTM D5185m ASTM D7844 *ASTM D7624 *ASTM D7415	250 10 100 450 3000 1150 1350 4250 limit/base >25 >158 >20 limit/base >3 >20 >30 limit/base >25	0 0 4 1 59 2502 939 1110 4313 current 10 7 48 current 0.4 8.7 23.1	history1 history1	history2 history2





OIL ANALYSIS REPORT

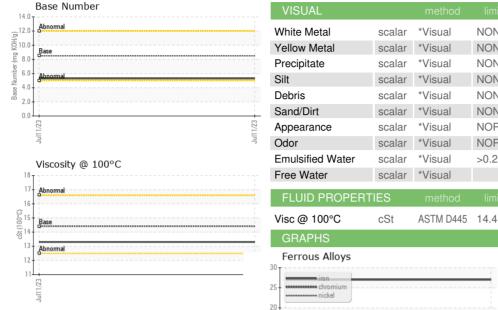



VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.2	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	TIES	method	limit/base	current	history1	history2

13.3











Certificate L2367

Laboratory Sample No. Lab Number Unique Number : 10566493

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 05905137

: WC0804169

Received Diagnosed

: 24 Jul 2023 Diagnostician : Wes Davis Test Package : CONST (Additional Tests: TBN)

: 24 Jul 2023

EAI EQUIPMENT A DIIV OF PLEASANT CONSTRUCTION INC 24024 FREDERICK ROAD

CLARKSBURG, MD US 20871

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: