




# PROBLEM SUMMARY

Sample Rating Trend

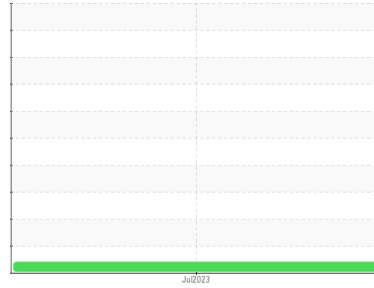

VIS DEBRIS



Machine Id

**T-B23 (S/N 1.00000383E-012)**

Component

**Agitator Gearbox**

Fluid

**NOT GIVEN (--- GAL)**

## COMPONENT CONDITION SUMMARY

No relevant graphs to display

## RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

## PROBLEMATIC TEST RESULTS

|               |        |         |      |                 |     |     |
|---------------|--------|---------|------|-----------------|-----|-----|
| Sample Status |        |         |      | <b>ABNORMAL</b> | --- | --- |
| Debris        | scalar | *Visual | NONE | <b>▲ HEAVY</b>  | --- | --- |

Customer Id: AVEMIL  
 Sample No.: WC05905405  
 Lab Number: 05905405  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:

Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

| Action        | Status | Date | Done By | Description   |
|---------------|--------|------|---------|---|
| Change Filter | ---    | ---  | ?       | We recommend you service the filters on this component if applicable.                                       |
| Alert         | ---    | ---  | ?       | We were unable to perform a particle count due to a high concentration of particles present in this sample. |

## HISTORICAL DIAGNOSIS




# OIL ANALYSIS REPORT

Sample Rating Trend

VIS DEBRIS

Machine Id  
**T-B23 (S/N 1.00000383E-012)**

Component  
**Agitator Gearbox**  
Fluid  
**NOT GIVEN (--- GAL)**

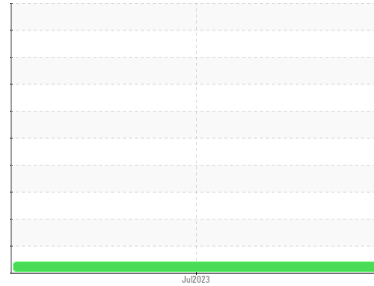

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

### Wear

All component wear rates are normal.

### Contamination

High concentration of visible dirt/debris present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

| method        | limit/base       | current            | history1 | history2 |
|---------------|------------------|--------------------|----------|----------|
| Sample Number | Client Info      | <b>WC05905405</b>  | ---      | ---      |
| Sample Date   | Client Info      | <b>23 Jul 2023</b> | ---      | ---      |
| Machine Age   | mths Client Info | <b>0</b>           | ---      | ---      |
| Oil Age       | mths Client Info | <b>0</b>           | ---      | ---      |
| Oil Changed   | Client Info      | <b>N/A</b>         | ---      | ---      |
| Sample Status |                  | <b>ABNORMAL</b>    | ---      | ---      |

## WEAR METALS

| method                   | limit/base | current      | history1 | history2 |
|--------------------------|------------|--------------|----------|----------|
| Iron ppm ASTM D5185m     | >150       | <b>68</b>    | ---      | ---      |
| Chromium ppm ASTM D5185m | >10        | <b>&lt;1</b> | ---      | ---      |
| Nickel ppm ASTM D5185m   | >10        | <b>0</b>     | ---      | ---      |
| Titanium ppm ASTM D5185m |            | <b>0</b>     | ---      | ---      |
| Silver ppm ASTM D5185m   |            | <b>&lt;1</b> | ---      | ---      |
| Aluminum ppm ASTM D5185m | >25        | <b>0</b>     | ---      | ---      |
| Lead ppm ASTM D5185m     | >100       | <b>0</b>     | ---      | ---      |
| Copper ppm ASTM D5185m   | >50        | <b>0</b>     | ---      | ---      |
| Tin ppm ASTM D5185m      | >10        | <b>0</b>     | ---      | ---      |
| Vanadium ppm ASTM D5185m |            | <b>0</b>     | ---      | ---      |
| Cadmium ppm ASTM D5185m  |            | <b>0</b>     | ---      | ---      |

## ADDITIVES

| method                     | limit/base | current      | history1 | history2 |
|----------------------------|------------|--------------|----------|----------|
| Boron ppm ASTM D5185m      |            | <b>7</b>     | ---      | ---      |
| Barium ppm ASTM D5185m     |            | <b>&lt;1</b> | ---      | ---      |
| Molybdenum ppm ASTM D5185m |            | <b>0</b>     | ---      | ---      |
| Manganese ppm ASTM D5185m  |            | <b>2</b>     | ---      | ---      |
| Magnesium ppm ASTM D5185m  |            | <b>1</b>     | ---      | ---      |
| Calcium ppm ASTM D5185m    |            | <b>7</b>     | ---      | ---      |
| Phosphorus ppm ASTM D5185m |            | <b>282</b>   | ---      | ---      |
| Zinc ppm ASTM D5185m       |            | <b>49</b>    | ---      | ---      |
| Sulfur ppm ASTM D5185m     |            | <b>12352</b> | ---      | ---      |

## CONTAMINANTS

| method                    | limit/base | current  | history1 | history2 |
|---------------------------|------------|----------|----------|----------|
| Silicon ppm ASTM D5185m   | >50        | <b>2</b> | ---      | ---      |
| Sodium ppm ASTM D5185m    |            | <b>0</b> | ---      | ---      |
| Potassium ppm ASTM D5185m | >20        | <b>1</b> | ---      | ---      |

## FLUID DEGRADATION



| method                               | limit/base | current     | history1 | history2 |
|--------------------------------------|------------|-------------|----------|----------|
| Acid Number (AN) mg KOH/g ASTM D8045 |            | <b>0.91</b> | ---      | ---      |

## VISUAL

| method                          | limit/base | current        | history1 | history2 |
|---------------------------------|------------|----------------|----------|----------|
| White Metal scalar *Visual      | NONE       | <b>NONE</b>    | ---      | ---      |
| Yellow Metal scalar *Visual     | NONE       | <b>NONE</b>    | ---      | ---      |
| Precipitate scalar *Visual      | NONE       | <b>NONE</b>    | ---      | ---      |
| Silt scalar *Visual             | NONE       | <b>NONE</b>    | ---      | ---      |
| Debris scalar *Visual           | NONE       | <b>▲ HEAVY</b> | ---      | ---      |
| Sand/Dirt scalar *Visual        | NONE       | <b>NONE</b>    | ---      | ---      |
| Appearance scalar *Visual       | NORML      | <b>NORML</b>   | ---      | ---      |
| Odor scalar *Visual             | NORML      | <b>NORML</b>   | ---      | ---      |
| Emulsified Water scalar *Visual | >0.1       | <b>NEG</b>     | ---      | ---      |
| Free Water scalar *Visual       |            | <b>NEG</b>     | ---      | ---      |



# OIL ANALYSIS REPORT



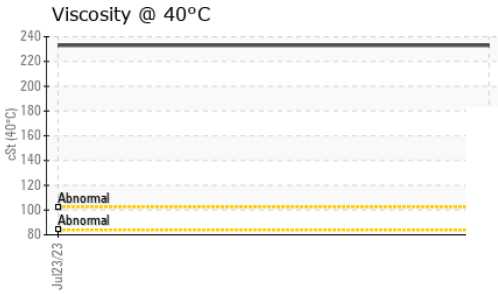
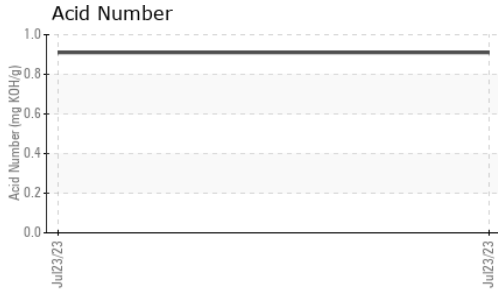


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445  | 233     | ---      | ---      |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

|        |  |  |  |          |          |
|--------|--|--|--|----------|----------|
| Color  |  |  |  | no image | no image |
| Bottom |  |  |  | no image | no image |

## GRAPHS

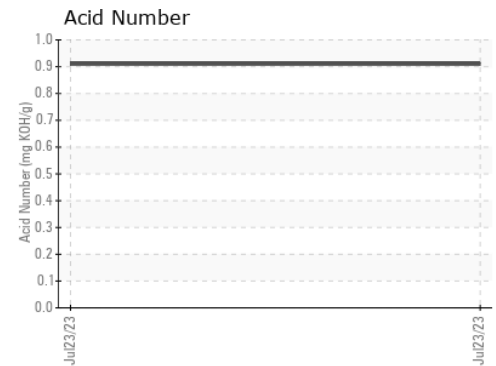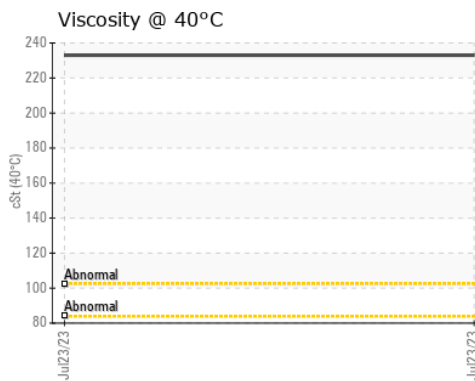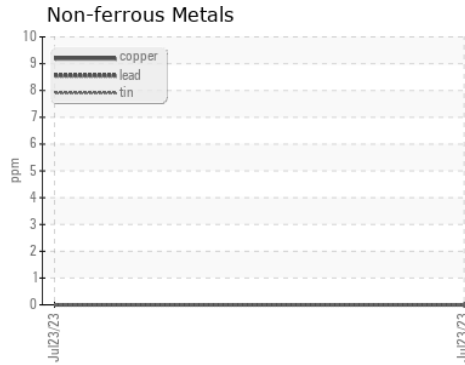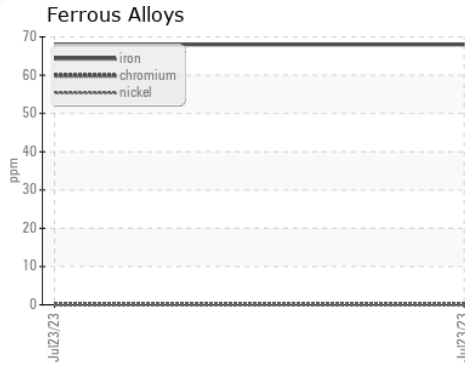

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC05905405 **Received** : 24 Jul 2023  
**Lab Number** : 05905405 **Diagnosed** : 26 Jul 2023  
**Unique Number** : 10566761 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: PrtCount )

**AVERY DENNISON CHEMICAL DIVISION**  
 171 DRAKETOWN RD  
 MILL HALL, PA  
 US 17751  
 Contact: DONALD EYER  
 DONALD.EYER@AVERYDENNISON.COM  
 T:  
 F: (570)748-1813

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)