

Machine Id **TE5** Component **Agitator Gearbox** Fluid **MOBIL MOBILGEAR 630 (5 GAL)**

COMPONENT CONDITION SUMMARY

No relevant graphs to display

RECOMMENDATION

Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

PROBLEMATIC T	EST RE	SULTS				
Sample Status				ABNORMAL	ABNORMAL	NORMAL
Debris	scalar	*Visual	NONE	A MODER	NONE	NONE

Customer Id: AVEMIL Sample No.: WC05905420 Lab Number: 05905420 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDED AC	TIONS		
Action	Status	Date	Done By
Alert			?

Description

We were unable to perform a particle count due to a high concentration of particles present in this sample.

HISTORICAL DIAGNOSIS



16 Feb 2021 Diag: Wes Davis

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.All component wear rates are normal. Particles $>4\mu$ m are abnormally high. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

30 Jan 2019 Diag: Jonathan Hester



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

NORMAL



06 Jan 2017 Diag: Wes Davis

Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the component. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.







OIL ANALYSIS REPORT



VIS DEBRIS



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.


		Mar2010	Mar2011 Mar2012	Apr2013 Feb2014 Jan2019	Jul2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC05905420	WC0507863	WCI2341275
Sample Date		Client Info		23 Jul 2023	16 Feb 2021	30 Jan 2019
Machine Age	mths	Client Info		0	0	0
Oil Age	mths	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	11	16	10
Chromium	ppm	ASTM D5185m	>10	0	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	0
Lead	ppm	ASTM D5185m	>100	<1	0	0
Copper	ppm	ASTM D5185m	>50	<1	0	0
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m	>5		0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		4	6	6
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		0	<1	0
Calcium	ppm	ASTM D5185m		20	26	19
Phosphorus	ppm	ASTM D5185m		224	239	214
Zinc	ppm	ASTM D5185m		8	5	9
Sulfur	ppm	ASTM D5185m		14377	11519	16363
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<1	1	1
Sodium	ppm	ASTM D5185m		0	3	2
Potassium	maa	ASTM D5185m	>20	<1	<1	<1

Sodium	ppm	ASTIVI DST85M		U	3	2
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000		67764	
Particles >6µm		ASTM D7647	>5000		1963	
Particles >14µm		ASTM D7647	>640		33	
Particles >21µm		ASTM D7647	>160		6	
Particles >38µm		ASTM D7647	>40		0	
Particles >71µm		ASTM D7647	>10		0	
Oil Cleanliness		ISO 4406 (c)	>21/19/16		2 3/18/12	
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.64	0.628	0.713


Report Id: AVEMIL [WUSCAR] 05905420 (Generated: 07/25/2023 16:18:10) Rev: 1



OIL ANALYSIS REPORT

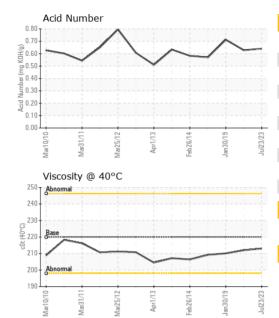

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	MODER	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
FLUID PROPERT Visc @ 40°C	IES cSt	method ASTM D445	limit/base 220	current 213	history1 212	history2 210.1
	cSt					
Visc @ 40°C	cSt	ASTM D445	220	213	212	210.1

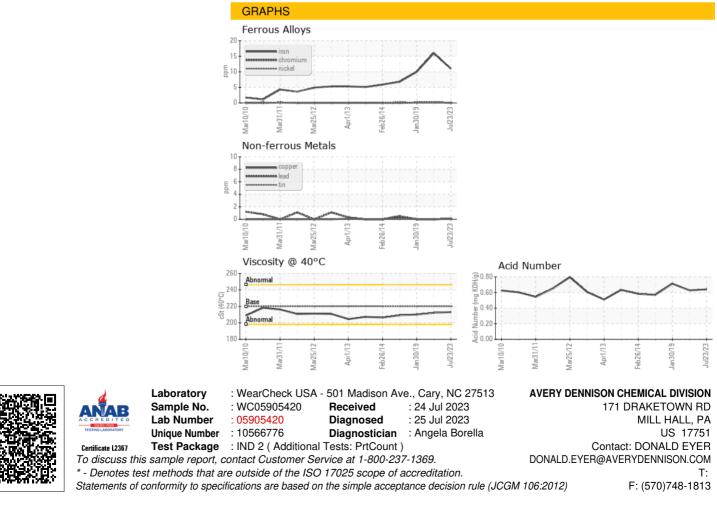

Contact/Location: DONALD EYER - AVEMIL