

PROBLEM SUMMARY

Sample Rating Trend

ISO



TU-4 (S/N 02DEM0792)

Component Agitator Gearbox

NOT GIVEN (--- GAL)

COMPONENT CONDITION SUMMARY



RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

PROBLEMATIC TEST RESULTS							
Sample Status			ATTENTION				
Particles >4µm	ASTM D7647	>20000	<u>28558</u>				
Oil Cleanliness	ISO 4406 (c)	>21/19/16	22/18/13				

Customer Id: AVEMIL Sample No.: WC05905433 Lab Number: 05905433 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS					
Action	Status	Date	Done By	Description	
Information Required			?	Please specify the brand, type, and viscosity of the oil on your next sample.	
HISTORICAL DIAGN	IOSIS				



OIL ANALYSIS REPORT

Acid Number (AN) mg KOH/g ASTM D8045



TU-4 (S/N 02DEM0792) Component

Agitator Gearbox

NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.


	ISO
	<u> </u>
 _	

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC05905433		
Sample Date		Client Info		23 Jul 2023		
Machine Age	mths	Client Info		0		
Oil Age	mths	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	16		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		<1		
Aluminum	ppm	ASTM D5185m	>25	0		
Lead	ppm	ASTM D5185m	>100	<1		
Copper	ppm	ASTM D5185m	>50	9		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<1		
Barium	ppm	ASTM D5185m		<1		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		2		
Phosphorus	ppm	ASTM D5185m		246		
Zinc	ppm	ASTM D5185m		15		
Sulfur	ppm	ASTM D5185m		16581		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	1		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	1		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	28558		
Particles >6µm		ASTM D7647	>5000	1874		
Particles >14μm		ASTM D7647	>640	79		
Particles >21µm		ASTM D7647	>160	12		
Particles >38μm		ASTM D7647	>40	1		
Particles >71μm		ASTM D7647	>10	0		
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<u>22/18/13</u>		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	та КОЦ/а	ACTM DODAE		0.61		

0.61



OIL ANALYSIS REPORT

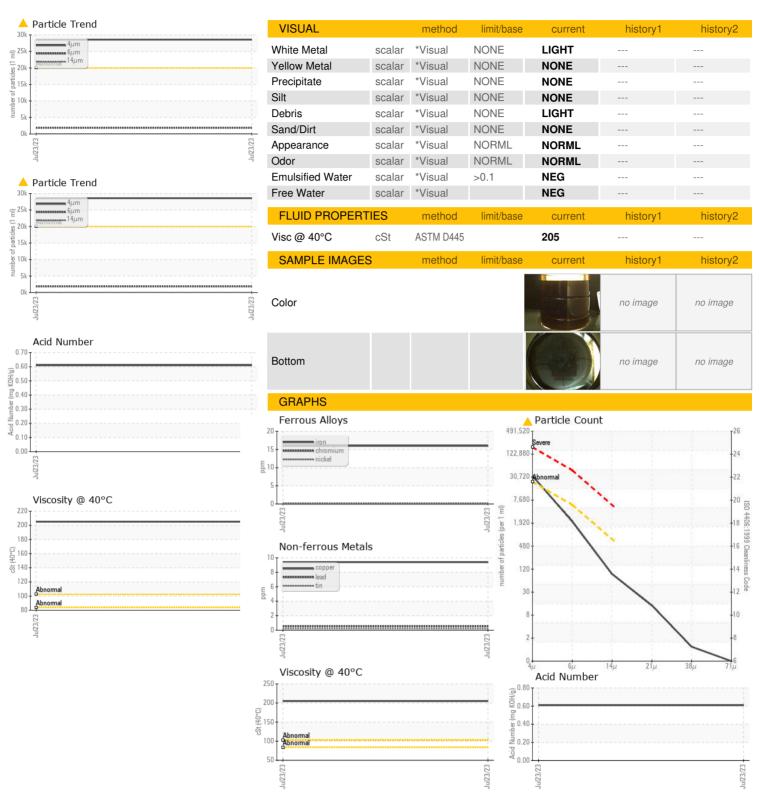





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: WC05905433 : 05905433

: 10566789

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 24 Jul 2023 Diagnosed

Diagnostician

: 25 Jul 2023 : Angela Borella

Test Package : IND 2 (Additional Tests: PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

AVERY DENNISON CHEMICAL DIVISION

171 DRAKETOWN RD MILL HALL, PA

US 17751 Contact: DONALD EYER

DONALD.EYER@AVERYDENNISON.COM

Contact/Location: DONALD EYER - AVEMIL

F: (570)748-1813

T: