



PROBLEM SUMMARY

Sample Rating Trend


VISCOSITY



Machine Id
T-401 (S/N 1-93405-1)


Component
Agitator Gearbox

Fluid
MOBIL MOBILGEAR 630 (1 GAL)

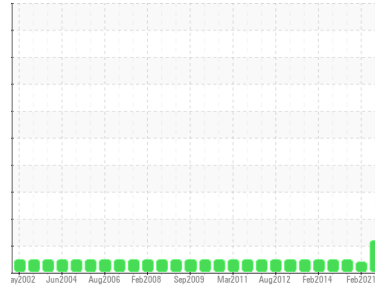


COMPONENT CONDITION SUMMARY

▲ Particle Trend

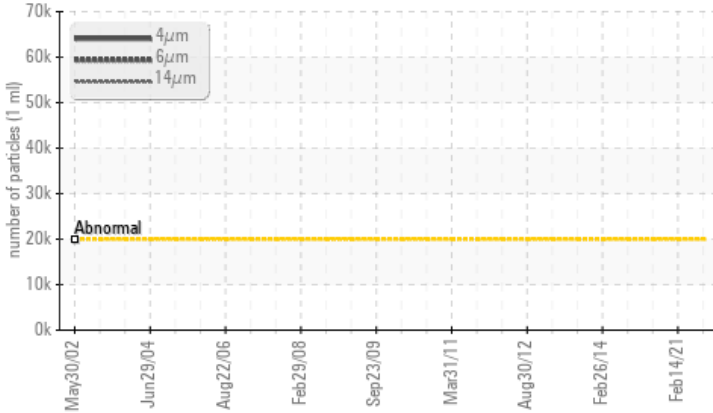

▲ Viscosity @ 40°C

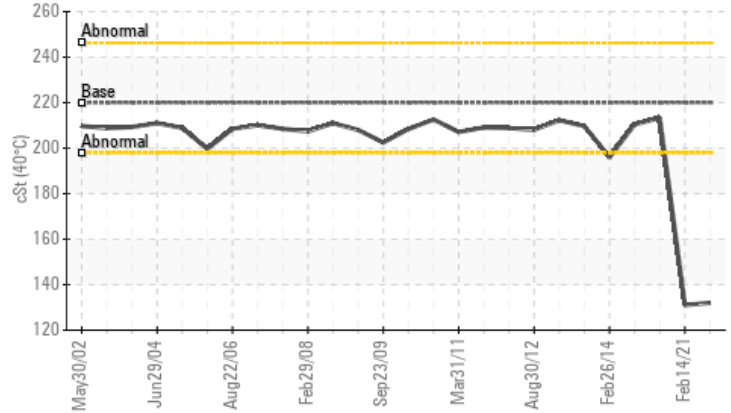

RECOMMENDATION

No corrective action is recommended at this time.
Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ATTENTION	NORMAL
Particles >4µm	ASTM D7647	>20000	▲ 61850	---	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 23/19/12	---	---
Visc @ 40°C	cSt ASTM D445	220	▲ 132	▲ 131	213.4

Customer Id: AVEMIL
Sample No.: WC05905450
Lab Number: 05905450
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Angela Borella +1 800-237-1369
angela.borella@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

14 Feb 2021 Diag: Jonathan Hester

VISCOSITY



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. Viscosity of sample indicates oil is within ISO 150 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid.

view report



30 Jan 2019 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the component. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



06 Jan 2017 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the component. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

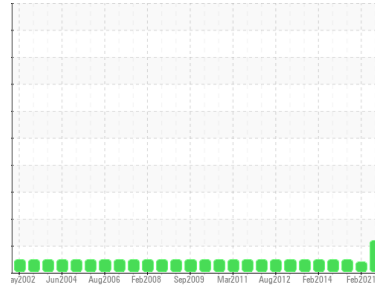

VISCOSITY



Machine Id
T-401 (S/N 1-93405-1)

Component
Agitator Gearbox

Fluid
MOBIL MOBILGEAR 630 (1 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

Viscosity of sample indicates oil is within ISO 150 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC05905450	WCI2341350	WCI2341326
Sample Date	Client Info		23 Jul 2023	14 Feb 2021	30 Jan 2019
Machine Age	mths	Client Info	0	0	0
Oil Age	mths	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ATTENTION	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	11	9	7
Chromium	ppm	ASTM D5185m >10	0	0	0
Nickel	ppm	ASTM D5185m >10	0	<1	<1
Titanium	ppm	ASTM D5185m	0	<1	0
Silver	ppm	ASTM D5185m	<1	3	0
Aluminum	ppm	ASTM D5185m >25	0	<1	0
Lead	ppm	ASTM D5185m >100	1	<1	<1
Copper	ppm	ASTM D5185m >50	8	<1	<1
Tin	ppm	ASTM D5185m >10	0	<1	0
Antimony	ppm	ASTM D5185m >5	---	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	5	1	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	7	2
Barium	ppm	ASTM D5185m	1	0	1
Molybdenum	ppm	ASTM D5185m	2	2	1
Manganese	ppm	ASTM D5185m	0	<1	<1
Magnesium	ppm	ASTM D5185m	2	5	0
Calcium	ppm	ASTM D5185m	10	13	1
Phosphorus	ppm	ASTM D5185m	260	259	227
Zinc	ppm	ASTM D5185m	239	226	328
Sulfur	ppm	ASTM D5185m	10566	8847	20002

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	1	1	1
Sodium	ppm	ASTM D5185m	0	<1	1
Potassium	ppm	ASTM D5185m >20	1	<1	<1

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 61850	---	---
Particles >6µm	ASTM D7647	>5000	2948	---	---
Particles >14µm	ASTM D7647	>640	38	---	---
Particles >21µm	ASTM D7647	>160	6	---	---
Particles >38µm	ASTM D7647	>40	1	---	---
Particles >71µm	ASTM D7647	>10	1	---	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 23/19/12	---	---


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.39	0.412	0.684




OIL ANALYSIS REPORT


▲ Particle Trend

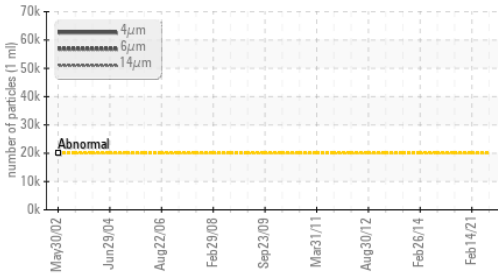


▲ Particle Trend

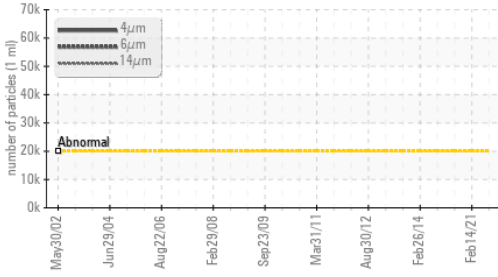

▲ Viscosity @ 40°C

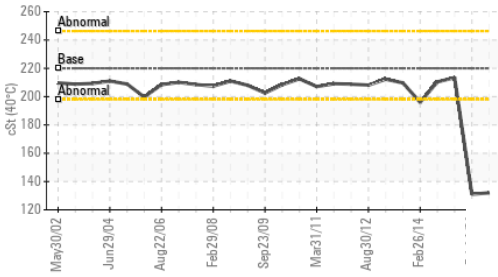


Acid Number

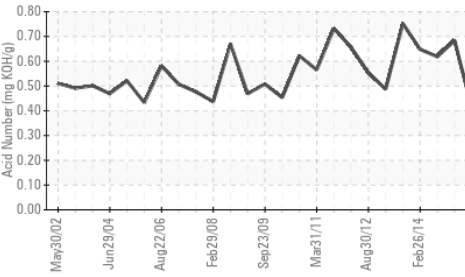





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 220	▲ 132	▲ 131	213.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

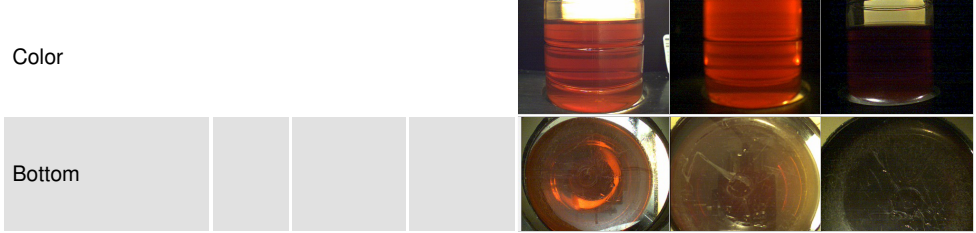

GRAPHS

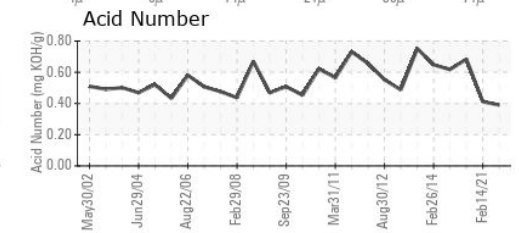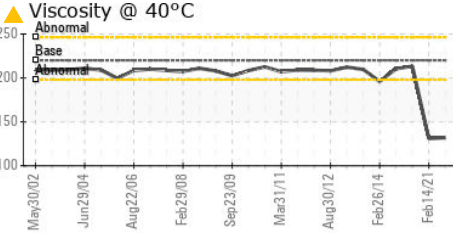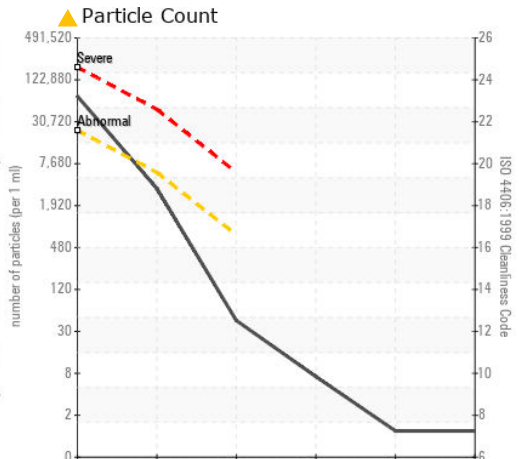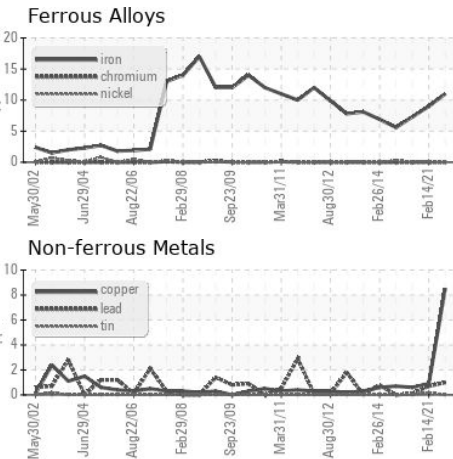

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC05905450 Received : 24 Jul 2023
 Lab Number : 05905450 Diagnosed : 25 Jul 2023
 Unique Number : 10566806 Diagnostician : Angela Borella
 Test Package : IND 2 (Additional Tests: PrtCount)

AVERY DENNISON CHEMICAL DIVISION
 171 DRAKETOWN RD
 MILL HALL, PA
 US 17751
 Contact: DONALD EYER
 DONALD.EYER@AVERYDENNISON.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (570)748-1813