


PROBLEM SUMMARY

Sample Rating Trend




MYCOM LSB-2-ER-1 (S/N SU1426)

Refrigeration Compressor

USPI ALT-68 SC (--- GAL)

COMPONENT CONDITION SUMMARY

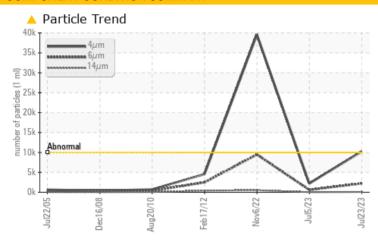

RECOMMENDATION

Resample at the next service interval to monitor.

PROBLEMATIC TEST	RESULTS				
Sample Status			ATTENTION	NORMAL	ABNORMAL
Particles >4µm	ASTM D7647	>10000	<u> </u>	2204	△ 39600
Oil Cleanliness	ISO 4406 (c)	>20/18/15	<u> </u>	18/16/12	22/20/16

Customer Id: ADVORA Sample No.: USPM5905481 Lab Number: 05905481 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

05 Jul 2023 Diag: Doug Bogart

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



06 Nov 2022 Diag: Doug Bogart

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



17 Feb 2012 Diag: Don Baldridge

150




No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of particulates present in the oil. The condition of oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend

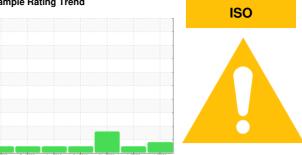

MYCOM LSB-2-ER-1 (S/N SU1426)

Refrigeration Compressor

USPI ALT-68 SC (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 6 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Jui2005 Dec2008 Aug2010 Feb2012 Nev2022 Jui2023 Jui2023							
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		USPM5905481	USP243431	USP226040	
Sample Date		Client Info		23 Jul 2023	05 Jul 2023	06 Nov 2022	
Machine Age	hrs	Client Info		0	0	0	
Oil Age	hrs	Client Info		0	0	0	
Oil Changed		Client Info		N/A	Not Changd	Not Changd	
Sample Status				ATTENTION	NORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>8	0	<1	<1	
Chromium	ppm	ASTM D5185m	>2	0	0	0	
Nickel	ppm	ASTM D5185m		0	0	0	
Titanium	ppm	ASTM D5185m		0	0	0	
Silver	ppm	ASTM D5185m	>2	<1	0	0	
Aluminum	ppm	ASTM D5185m	>3	0	<1	0	
Lead	ppm	ASTM D5185m	>2	0	0	0	
Copper	ppm	ASTM D5185m	>8	0	<1	0	
Tin	ppm	ASTM D5185m	>4	0	0	0	
Antimony	ppm	ASTM D5185m					
Vanadium	ppm	ASTM D5185m		0	<1	0	
Cadmium	ppm	ASTM D5185m		0	0	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	0	
Barium	ppm	ASTM D5185m		<1	<1	0	
Molybdenum	ppm	ASTM D5185m		0	0	0	
Manganese	ppm	ASTM D5185m		0	0	0	
Magnesium	ppm	ASTM D5185m		0	0	0	
Calcium	ppm	ASTM D5185m		0	0	0	
Phosphorus	ppm	ASTM D5185m		0	<1	0	
Zinc	ppm	ASTM D5185m		0	0	0	
Sulfur	ppm	ASTM D5185m	50	0	0	0	
CONTAMINANTS	3	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	2	1	2	
Sodium	ppm	ASTM D5185m		0	<1	0	
Potassium	ppm	ASTM D5185m	>20	<1	1	0	
Water	%	ASTM D6304	>0.01	0.007	0.003	0.003	
ppm Water	ppm	ASTM D6304	>100	70.8	32.6	32.2	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2	
Particles >4μm		ASTM D7647	>10000	<u> </u>	2204	△ 39600	
Particles >6µm		ASTM D7647	>2500	2228	595	△ 9478	
Particles >14μm		ASTM D7647	>320	84	23	<u>▲</u> 517	
Particles >21µm		ASTM D7647	>80	22	4	77	
Particles >38μm		ASTM D7647	>20	1	0	4	
Particles >71μm		ASTM D7647	>4	0	0	0	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<u>21/18/14</u>	18/16/12	<u>22/20/16</u>	
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2	



OIL ANALYSIS REPORT

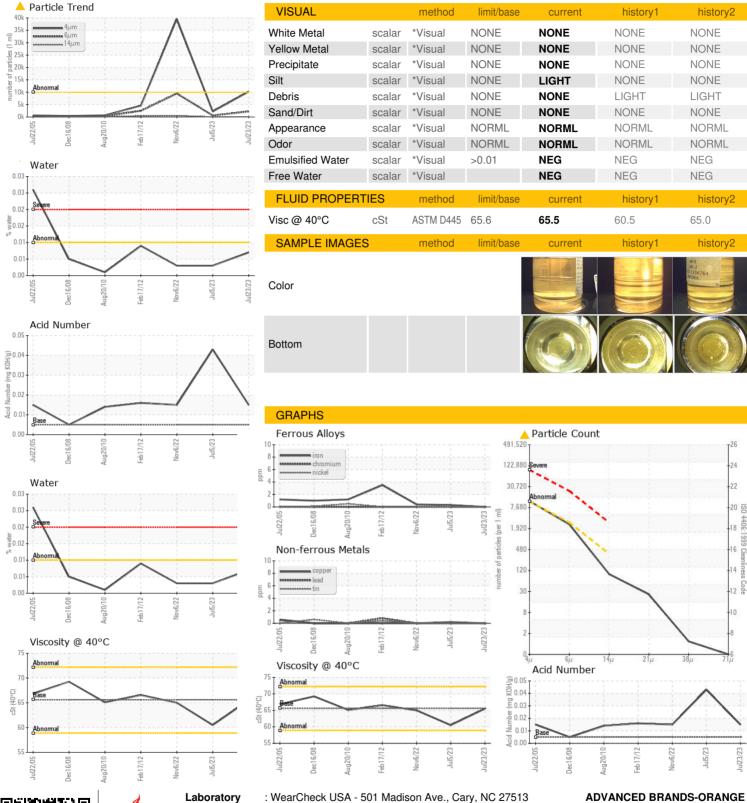





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

Test Package

: USPM5905481 : 05905481

Received : 10566837

: 24 Jul 2023 Diagnosed : 25 Jul 2023 Diagnostician : Doug Bogart 101 14TH ST. SE

ORANGE, IA US 51041

Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

: IND 2

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (712)737-4820 F: