




PROBLEM SUMMARY

Sample Rating Trend

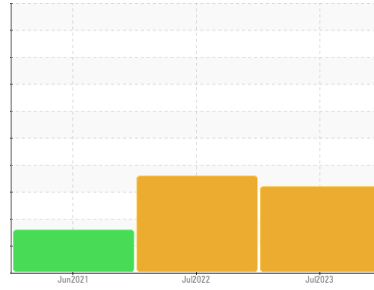

SEDIMENT




Machine Id
KAESER SK 20 7023278 (S/N 1046)

Component
Compressor

Fluid
KAESER SIGMA (OEM) S-460 (--- QTS)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

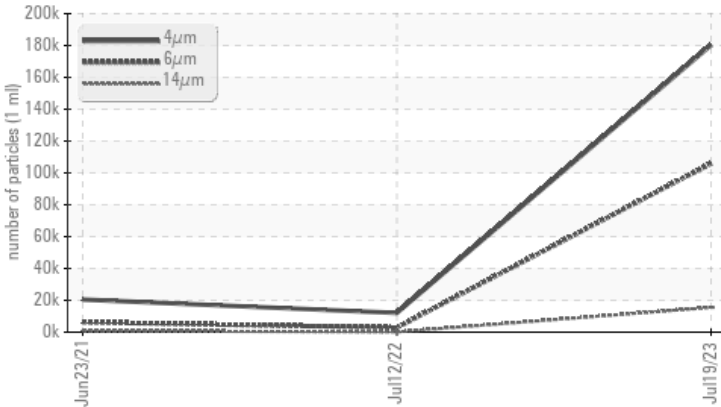

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ABNORMAL	ABNORMAL
Particles >6µm	ASTM D7647	>1300	▲ 105856	▲ 2823	▲ 6223
Particles >14µm	ASTM D7647	>80	▲ 15502	▲ 131	▲ 763
Particles >21µm	ASTM D7647	>20	▲ 4514	▲ 35	▲ 253
Particles >38µm	ASTM D7647	>4	▲ 193	▲ 5	▲ 14
Particles >71µm	ASTM D7647	>3	▲ 10	0	0
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 25/24/21	▲ 21/19/14	▲ 20/17
Silt	scalar	*Visual	▲ MODER	NONE	NONE

Customer Id: GOLWAT
 Sample No.: KC05905533
 Lab Number: 05905533
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

12 Jul 2022 Diag: Jonathan Hester

WATER



Oil and filter change at the time of sampling has been noted. We recommend an early resample in 500 hours to monitor this condition. All component wear rates are normal. There is a high amount of particulates present in the oil. There is a light concentration of water present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



23 Jun 2021 Diag: Don Baldrige

ISO




No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

view report



OIL ANALYSIS REPORT

Sample Rating Trend

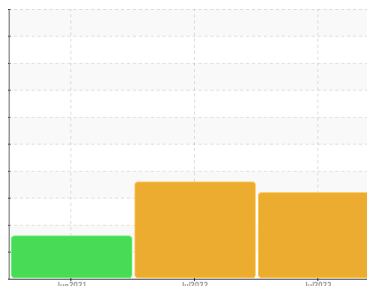

SEDIMENT



Machine Id
KAESER SK 20 7023278 (S/N 1046)

Component
Compressor

Fluid
KAESER SIGMA (OEM) S-460 (--- QTS)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the oil. There is a moderate amount of visible silt present in the sample.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KC05905533	KC100228	KC78547
Sample Date	Client Info	19 Jul 2023	12 Jul 2022	23 Jun 2021
Machine Age	hrs	2585	2023	1329
Oil Age	hrs	0	694	1329
Oil Changed	Client Info	N/A	Changed	Changed
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >50	1	<1	<1
Chromium ppm	ASTM D5185m >10	0	0	0
Nickel ppm	ASTM D5185m >3	0	<1	0
Titanium ppm	ASTM D5185m >3	0	0	0
Silver ppm	ASTM D5185m >2	<1	<1	0
Aluminum ppm	ASTM D5185m >10	<1	<1	<1
Lead ppm	ASTM D5185m >10	<1	0	0
Copper ppm	ASTM D5185m >50	14	2	2
Tin ppm	ASTM D5185m >10	0	<1	<1
Antimony ppm	ASTM D5185m	---	---	0
Vanadium ppm	ASTM D5185m	0	0	0
Cadmium ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	0	<1	13
Barium ppm	ASTM D5185m 90	<1	4	<1
Molybdenum ppm	ASTM D5185m	0	0	0
Manganese ppm	ASTM D5185m	0	<1	0
Magnesium ppm	ASTM D5185m 90	17	61	66
Calcium ppm	ASTM D5185m 2	0	<1	1
Phosphorus ppm	ASTM D5185m	0	8	2
Zinc ppm	ASTM D5185m	3	3	0

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >25	1	<1	0
Sodium ppm	ASTM D5185m	9	13	17
Potassium ppm	ASTM D5185m >20	23	4	6
Water %	ASTM D6304 >0.05	0.014	▲ 0.082	0.049
ppm Water	ASTM D6304 >500	143.5	▲ 821.9	494.3






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	180247	12066	20489
Particles >6µm	ASTM D7647 >1300	▲ 105856	▲ 2823	▲ 6223
Particles >14µm	ASTM D7647 >80	▲ 15502	▲ 131	▲ 763
Particles >21µm	ASTM D7647 >20	▲ 4514	▲ 35	▲ 253
Particles >38µm	ASTM D7647 >4	▲ 193	▲ 5	▲ 14
Particles >71µm	ASTM D7647 >3	▲ 10	0	0
Oil Cleanliness	ISO 4406 (c) >--/17/13	▲ 25/24/21	▲ 21/19/14	▲ 20/17

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045 0.4	0.15	0.40	0.305

OIL ANALYSIS REPORT

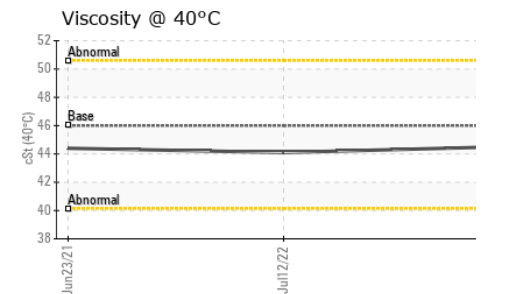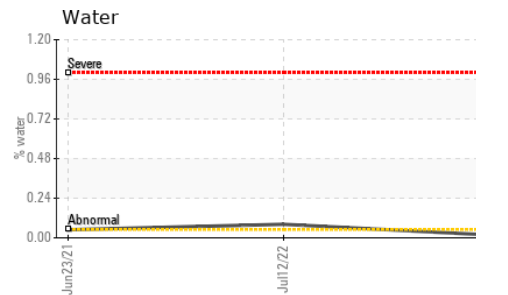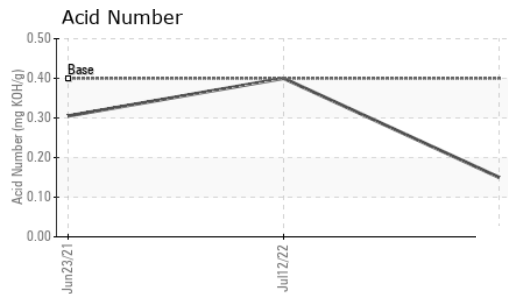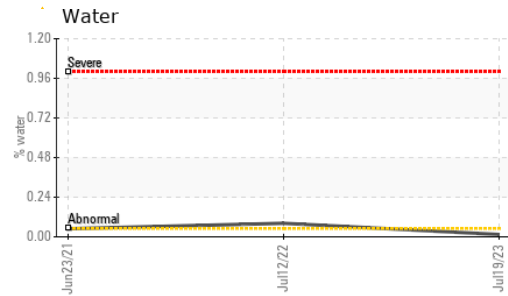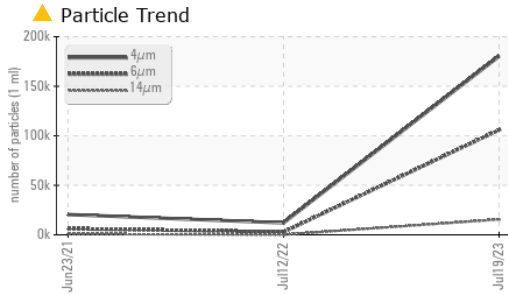






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	▲ MODER	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.5	44.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------



GRAPHS

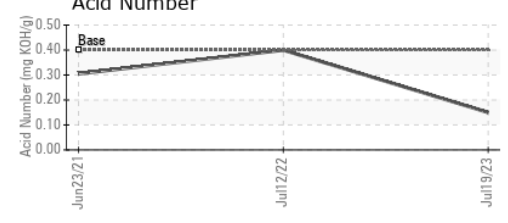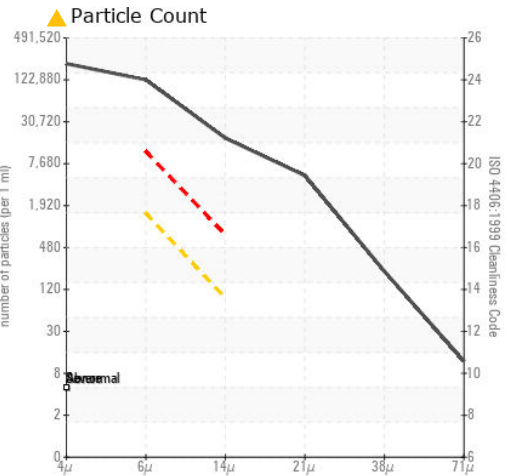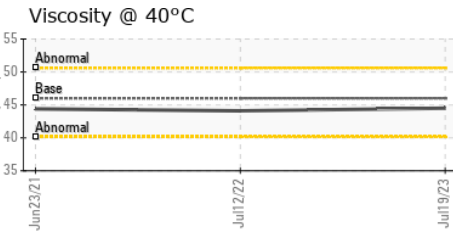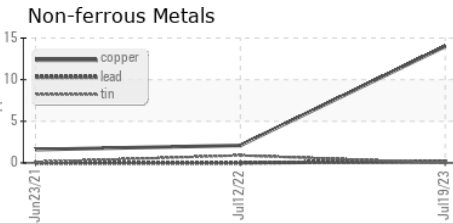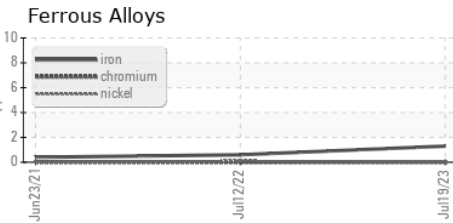

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : KC05905533
 Lab Number : 05905533
 Unique Number : 10566889
 Test Package : IND 2
 Received : 24 Jul 2023
 Diagnosed : 25 Jul 2023
 Diagnostician : Don Baldrige

GOLDEN PLAIN FARMS INC
 8940 INDUSTRIAL DR
 WATERVLIET, MI
 US 49098
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: