




PROBLEM SUMMARY

Area
MASS-46
 Machine Id
QUINCY UTY201562 - HUTCHINSON
 Component
Compressor

Sample Rating Trend

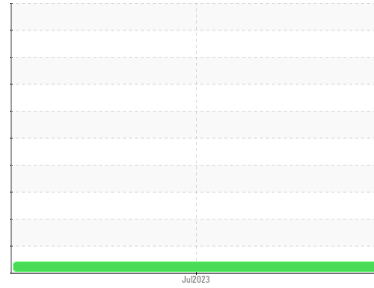


VISCOSITY



COMPONENT CONDITION SUMMARY

▲ Viscosity @ 40°C

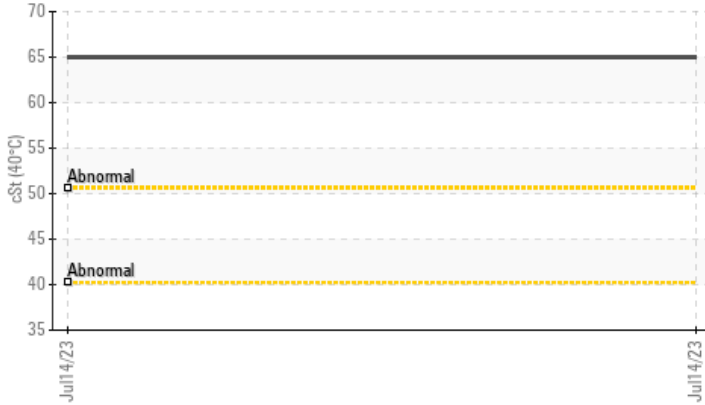

RECOMMENDATION

Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

| Sample Status | | | ATTENTION | --- | --- |
|---------------|-----|-----------|-----------|-----|-----|
| Visc @ 40°C | cSt | ASTM D445 | ▲ 65.0 | --- | --- |

Customer Id: UCMICGRA
 Sample No.: UCH05905616
 Lab Number: 05905616
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS




OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY

Area
MASS-46
Machine Id
QUINCY UTY201562 - HUTCHINSON
Component
Compressor

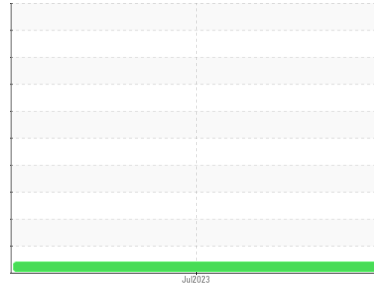

DIAGNOSIS

▲ Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

▲ Fluid Condition

The oil viscosity is higher than normal. Confirm oil type. The AN level is acceptable for this fluid.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | UCH05905616 | --- | --- |
| Sample Date | Client Info | | 14 Jul 2023 | --- | --- |
| Machine Age | hrs | Client Info | 43795 | --- | --- |
| Oil Age | hrs | Client Info | 7200 | --- | --- |
| Oil Changed | Client Info | | Not Chngd | --- | --- |
| Sample Status | | | ATTENTION | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >50 | <1 | --- | --- |
| Chromium | ppm | ASTM D5185m >10 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185m | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m >25 | <1 | --- | --- |
| Lead | ppm | ASTM D5185m >25 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m >50 | <1 | --- | --- |
| Tin | ppm | ASTM D5185m >15 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185m | 0 | --- | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | 0 | --- | --- |
| Barium | ppm | ASTM D5185m | 2 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m | <1 | --- | --- |
| Calcium | ppm | ASTM D5185m | 2 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 448 | --- | --- |
| Zinc | ppm | ASTM D5185m | 0 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 763 | --- | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | 1 | --- | --- |
| Sodium | ppm | ASTM D5185m | 0 | --- | --- |
| Potassium | ppm | ASTM D5185m >20 | 0 | --- | --- |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.61 | --- | --- |


VISUAL

| | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|--------------|----------|----------|
| White Metal | scalar | *Visual NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual NONE | NONE | --- | --- |
| Precipitate | scalar | *Visual NONE | NONE | --- | --- |
| Silt | scalar | *Visual NONE | NONE | --- | --- |
| Debris | scalar | *Visual NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual NONE | NONE | --- | --- |
| Appearance | scalar | *Visual NORML | NORML | --- | --- |
| Odor | scalar | *Visual NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual >0.1 | NEG | --- | --- |
| Free Water | scalar | *Visual | NEG | --- | --- |




OIL ANALYSIS REPORT

▲ Viscosity @ 40°C

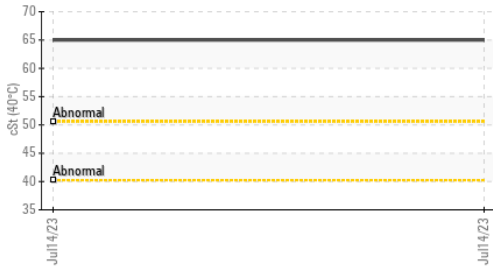

Acid Number

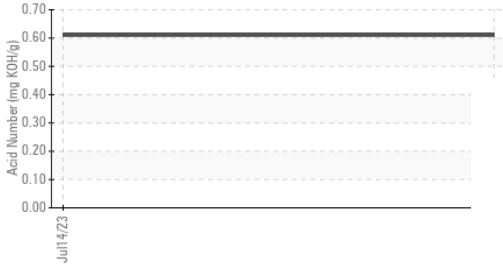

FLUID PROPERTIES


| method | limit/base | current | history1 | history2 | |
|-------------|------------|-----------|----------|----------|-----|
| Visc @ 40°C | cSt | ASTM D445 | ▲ 65.0 | --- | --- |

SAMPLE IMAGES


| method | limit/base | current | history1 | history2 |
|--------|------------|---------|----------|----------|
| Color | | | no image | no image |
| Bottom | | | no image | no image |

GRAPHS


Ferrous Alloys

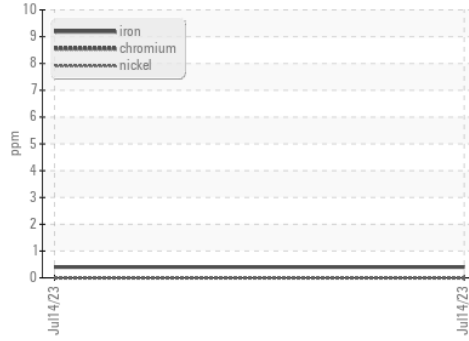

Non-ferrous Metals

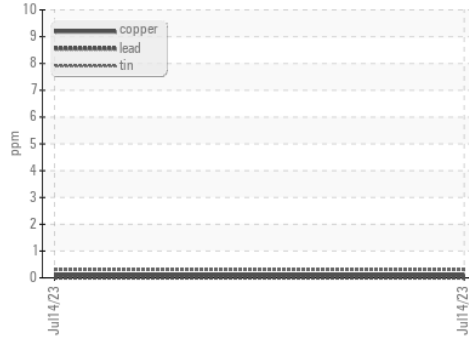

▲ Viscosity @ 40°C

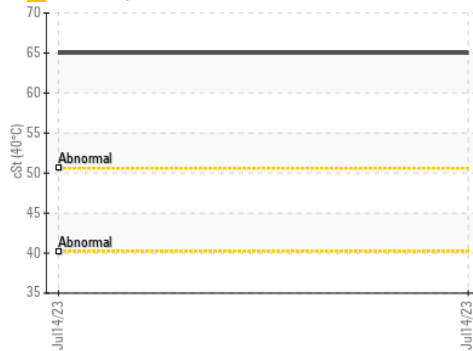

Acid Number



Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : UCH05905616 **Received** : 24 Jul 2023
Lab Number : 05905616 **Diagnosed** : 26 Jul 2023
Unique Number : 10566972 **Diagnostician** : Don Baldrige
Test Package : IND 2

MICHIGAN AIR SOLUTIONS
 4511 CLAY AVE SW
 GRAND RAPIDS, MI
 US 49548
 Contact: KEVIN GEERTMAN
 kevin@mi-air.com
 T:
 F: (616)531-0084

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)