




# PROBLEM SUMMARY

Area  
**MASS-46**  
 Machine Id  
**QUINCY UTY201561 - HUTCHINSON**  
 Component  
**Compressor**

Sample Rating Trend

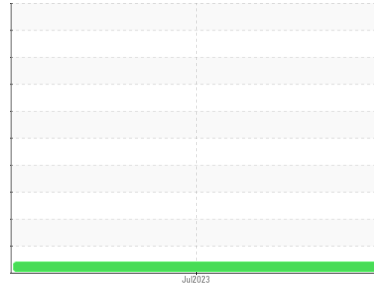


## VISCOSITY



### COMPONENT CONDITION SUMMARY

▲ Viscosity @ 40°C

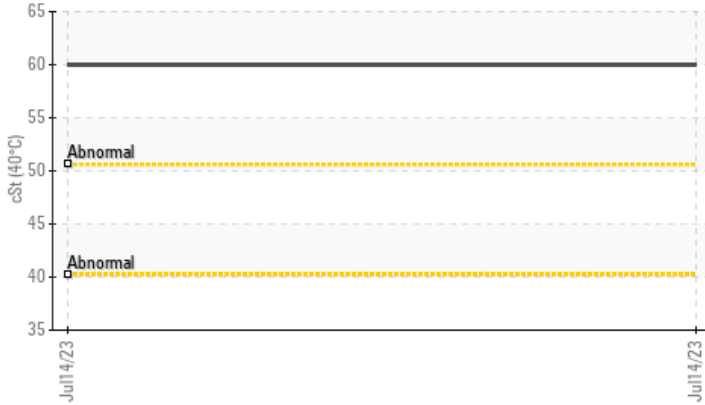

### RECOMMENDATION

Resample at the next service interval to monitor.

### PROBLEMATIC TEST RESULTS

| Sample Status |     |           | ATTENTION | --- | --- |
|---------------|-----|-----------|-----------|-----|-----|
| Visc @ 40°C   | cSt | ASTM D445 | ▲ 60.0    | --- | --- |

Customer Id: UCMICGRA  
 Sample No.: UCH05905617  
 Lab Number: 05905617  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS




# OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY

Area  
**MASS-46**  
Machine Id  
**QUINCY UTY201561 - HUTCHINSON**  
Component  
**Compressor**

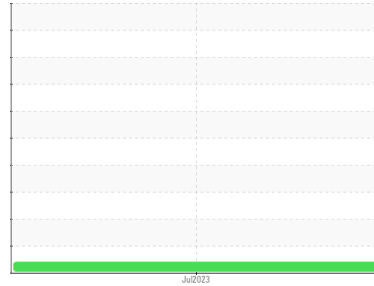

## DIAGNOSIS

### ▲ Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### ▲ Fluid Condition

The oil viscosity is higher than normal. Confirm oil type. The AN level is acceptable for this fluid.

## SAMPLE INFORMATION

| method        | limit/base      | current            | history1 | history2 |
|---------------|-----------------|--------------------|----------|----------|
| Sample Number | Client Info     | <b>UCH05905617</b> | ---      | ---      |
| Sample Date   | Client Info     | <b>14 Jul 2023</b> | ---      | ---      |
| Machine Age   | hrs Client Info | <b>43612</b>       | ---      | ---      |
| Oil Age       | hrs Client Info | <b>3500</b>        | ---      | ---      |
| Oil Changed   | Client Info     | <b>Not Chngd</b>   | ---      | ---      |
| Sample Status |                 | <b>ATTENTION</b>   | ---      | ---      |

## WEAR METALS

| method                   | limit/base | current      | history1 | history2 |
|--------------------------|------------|--------------|----------|----------|
| Iron ppm ASTM D5185m     | >50        | <b>&lt;1</b> | ---      | ---      |
| Chromium ppm ASTM D5185m | >10        | <b>0</b>     | ---      | ---      |
| Nickel ppm ASTM D5185m   |            | <b>0</b>     | ---      | ---      |
| Titanium ppm ASTM D5185m |            | <b>0</b>     | ---      | ---      |
| Silver ppm ASTM D5185m   |            | <b>0</b>     | ---      | ---      |
| Aluminum ppm ASTM D5185m | >25        | <b>1</b>     | ---      | ---      |
| Lead ppm ASTM D5185m     | >25        | <b>0</b>     | ---      | ---      |
| Copper ppm ASTM D5185m   | >50        | <b>&lt;1</b> | ---      | ---      |
| Tin ppm ASTM D5185m      | >15        | <b>0</b>     | ---      | ---      |
| Vanadium ppm ASTM D5185m |            | <b>0</b>     | ---      | ---      |
| Cadmium ppm ASTM D5185m  |            | <b>0</b>     | ---      | ---      |

## ADDITIVES

| method                     | limit/base | current      | history1 | history2 |
|----------------------------|------------|--------------|----------|----------|
| Boron ppm ASTM D5185m      |            | <b>0</b>     | ---      | ---      |
| Barium ppm ASTM D5185m     |            | <b>&lt;1</b> | ---      | ---      |
| Molybdenum ppm ASTM D5185m |            | <b>0</b>     | ---      | ---      |
| Manganese ppm ASTM D5185m  |            | <b>&lt;1</b> | ---      | ---      |
| Magnesium ppm ASTM D5185m  |            | <b>&lt;1</b> | ---      | ---      |
| Calcium ppm ASTM D5185m    |            | <b>1</b>     | ---      | ---      |
| Phosphorus ppm ASTM D5185m |            | <b>567</b>   | ---      | ---      |
| Zinc ppm ASTM D5185m       |            | <b>0</b>     | ---      | ---      |
| Sulfur ppm ASTM D5185m     |            | <b>761</b>   | ---      | ---      |

## CONTAMINANTS

| method                    | limit/base | current  | history1 | history2 |
|---------------------------|------------|----------|----------|----------|
| Silicon ppm ASTM D5185m   | >25        | <b>2</b> | ---      | ---      |
| Sodium ppm ASTM D5185m    |            | <b>0</b> | ---      | ---      |
| Potassium ppm ASTM D5185m | >20        | <b>0</b> | ---      | ---      |

## FLUID DEGRADATION

| method                               | limit/base | current     | history1 | history2 |
|--------------------------------------|------------|-------------|----------|----------|
| Acid Number (AN) mg KOH/g ASTM D8045 |            | <b>0.67</b> | ---      | ---      |

## VISUAL

| method                          | limit/base | current      | history1 | history2 |
|---------------------------------|------------|--------------|----------|----------|
| White Metal scalar *Visual      | NONE       | <b>NONE</b>  | ---      | ---      |
| Yellow Metal scalar *Visual     | NONE       | <b>NONE</b>  | ---      | ---      |
| Precipitate scalar *Visual      | NONE       | <b>NONE</b>  | ---      | ---      |
| Silt scalar *Visual             | NONE       | <b>NONE</b>  | ---      | ---      |
| Debris scalar *Visual           | NONE       | <b>NONE</b>  | ---      | ---      |
| Sand/Dirt scalar *Visual        | NONE       | <b>NONE</b>  | ---      | ---      |
| Appearance scalar *Visual       | NORML      | <b>NORML</b> | ---      | ---      |
| Odor scalar *Visual             | NORML      | <b>NORML</b> | ---      | ---      |
| Emulsified Water scalar *Visual | >0.1       | <b>NEG</b>   | ---      | ---      |
| Free Water scalar *Visual       |            | <b>NEG</b>   | ---      | ---      |




# OIL ANALYSIS REPORT

▲ Viscosity @ 40°C



Acid Number

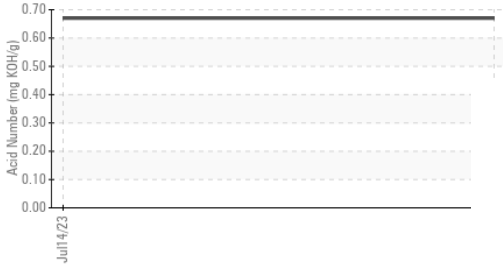

### FLUID PROPERTIES

| method      | limit/base | current | history1 | history2 |
|-------------|------------|---------|----------|----------|
| Visc @ 40°C | cSt        | ▲ 60.0  | ---      | ---      |

### SAMPLE IMAGES


| method | limit/base | current | history1 | history2 |
|--------|------------|---------|----------|----------|
| Color  |            |         | no image | no image |
| Bottom |            |         | no image | no image |

### GRAPHS


Ferrous Alloys



Non-ferrous Metals

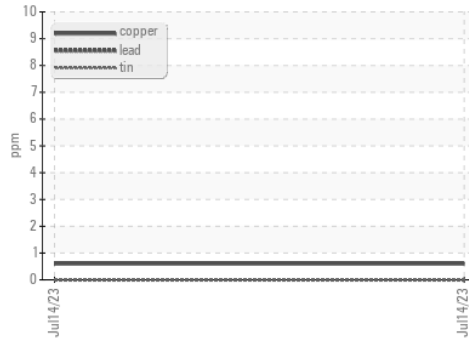

▲ Viscosity @ 40°C

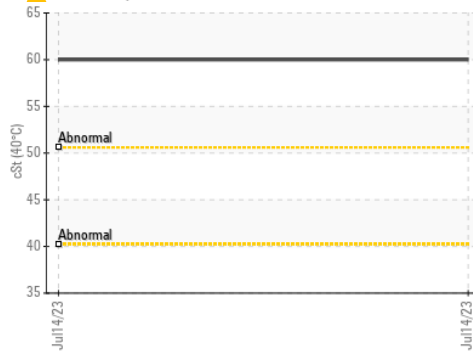

Acid Number



Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : UCH05905617 Received : 24 Jul 2023  
 Lab Number : 05905617 Diagnosed : 26 Jul 2023  
 Unique Number : 10566973 Diagnostician : Don Baldrige  
 Test Package : IND 2

**MICHIGAN AIR SOLUTIONS**  
 4511 CLAY AVE SW  
 GRAND RAPIDS, MI  
 US 49548  
 Contact: KEVIN GEERTMAN  
 kevin@mi-air.com  
 T:  
 F: (616)531-0084

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)