

# **OIL ANALYSIS REPORT**

Γ ,

Sample Rating Trend

ISO

# BULK TANK

Component

New (Unused) Oil

{not provided} (--- GAL)

### DIAGNOSIS

#### Recommendation

This is a baseline read-out on the submitted sample.


#### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

|                  |          |              |            | Aug2023       |          |          |
|------------------|----------|--------------|------------|---------------|----------|----------|
| SAMPLE INFORM    | MATION   | method       | limit/base | current       | history1 | history2 |
| Sample Number    |          | Client Info  |            | KL0012527     |          |          |
| Sample Date      |          | Client Info  |            | 04 Aug 2023   |          |          |
| Machine Age      | hrs      | Client Info  |            | 0             |          |          |
| Oil Age          | hrs      | Client Info  |            | 0             |          |          |
| Oil Changed      |          | Client Info  |            | N/A           |          |          |
| Sample Status    |          |              |            | ABNORMAL      |          |          |
| WEAR METALS      |          | method       | limit/base | current       | history1 | history2 |
| Iron             | ppm      | ASTM D5185m  |            | 1             |          |          |
| Chromium         | ppm      | ASTM D5185m  |            | <1            |          |          |
| Nickel           | ppm      | ASTM D5185m  |            | 0             |          |          |
| Titanium         | ppm      | ASTM D5185m  |            | 0             |          |          |
| Silver           | ppm      | ASTM D5185m  |            | 0             |          |          |
| Aluminum         | ppm      | ASTM D5185m  |            | 2             |          |          |
| Lead             | ppm      | ASTM D5185m  |            | 0             |          |          |
| Copper           | ppm      | ASTM D5185m  |            | 0             |          |          |
| Tin              | ppm      | ASTM D5185m  |            | 0             |          |          |
| Vanadium         | ppm      | ASTM D5185m  |            | 0             |          |          |
| Cadmium          | ppm      | ASTM D5185m  |            | 0             |          |          |
| ADDITIVES        |          | method       | limit/base | current       | history1 | history2 |
| Boron            | ppm      | ASTM D5185m  |            | 483           |          |          |
| Barium           | ppm      | ASTM D5185m  |            | 1             |          |          |
| Molybdenum       | ppm      | ASTM D5185m  |            | 76            |          |          |
| Manganese        | ppm      | ASTM D5185m  |            | 0             |          |          |
| Magnesium        | ppm      | ASTM D5185m  |            | 341           |          |          |
| Calcium          | ppm      | ASTM D5185m  |            | 1340          |          |          |
| Phosphorus       | ppm      | ASTM D5185m  |            | 962           |          |          |
| Zinc             | ppm      | ASTM D5185m  |            | 1147          |          |          |
| Sulfur           | ppm      | ASTM D5185m  |            | 3249          |          |          |
| CONTAMINANTS     |          | method       | limit/base | current       | history1 | history2 |
| Silicon          | ppm      | ASTM D5185m  |            | 5             |          |          |
| Sodium           | ppm      | ASTM D5185m  |            | 2             |          |          |
| Potassium        | ppm      | ASTM D5185m  | >20        | <1            |          |          |
| FLUID CLEANLIN   | ESS      | method       | limit/base | current       | history1 | history2 |
| Particles >4µm   |          | ASTM D7647   |            | 65685         |          |          |
| Particles >6µm   |          | ASTM D7647   | >1300      | <b>4</b> 3665 |          |          |
| Particles >14μm  |          | ASTM D7647   | >160       | 71            |          |          |
| Particles >21µm  |          | ASTM D7647   | >40        | 7             |          |          |
| Particles >38μm  |          | ASTM D7647   | >10        | 0             |          |          |
| Particles >71μm  |          | ASTM D7647   | >3         | 0             |          |          |
| Oil Cleanliness  |          | ISO 4406 (c) | >17/14     | <u> </u>      |          |          |
| FLUID DEGRADA    | TION     | method       | limit/base | current       | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045   |            | 2.19          |          |          |
| Base Number (BN) | mg KOH/g | ASTM D2896   |            | 9.60          |          |          |



## **OIL ANALYSIS REPORT**

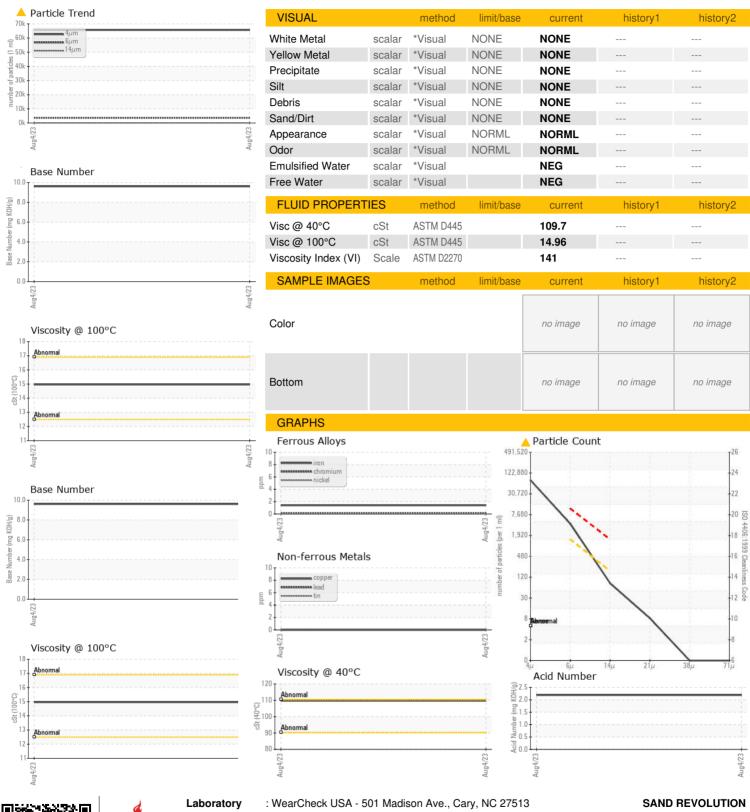



Sample No. Lab Number **Unique Number** 

: 10601840

: KL0012527 : 05921893

Received Diagnosed

: 10 Aug 2023 : 15 Aug 2023 Diagnostician : Jonathan Hester 10800 W CO RD 72 MIDLAND, TX

US 79703

T: F:

Test Package : MOB 2 ( Additional Tests: FT-IR, ICP-NewOil, KF, KV100, PrtCount, TBN, VI ) Contact: Service Manager Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)