

OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



VILTER 2

Component Compressor

MOBIL SHC 627 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

v/017 Mar2018 Nov2018 Sep2019 Jul2020 Mar2021 Jan2022 Sep2022							
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		WC0745752	WC0745739	WC0745733	
Sample Date		Client Info		02 Aug 2023	02 Mar 2023	05 Jan 2023	
Machine Age	hrs	Client Info		88400	84704	83370	
Oil Age	hrs	Client Info		88400	84704	83370	
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd	
Sample Status				NORMAL	NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>50	0	4	0	
Chromium	ppm	ASTM D5185m	>10	0	0	0	
Nickel	ppm	ASTM D5185m		0	0	0	
Titanium	ppm	ASTM D5185m		0	0	0	
Silver	ppm	ASTM D5185m		0	0	0	
Aluminum	ppm	ASTM D5185m	>25	1	<1	0	
Lead	ppm	ASTM D5185m	>25	0	0	0	
Copper	ppm	ASTM D5185m	>50	<1	0	0	
Tin	ppm		>15	0	<1	<1	
Vanadium	ppm	ASTM D5185m	7.0	<1	0	0	
Cadmium	ppm	ASTM D5185m		0	0	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	0	
Barium	ppm	ASTM D5185m		0	0	0	
Molybdenum	ppm	ASTM D5185m		0	6	0	
Manganese	ppm	ASTM D5185m		<1	0	0	
Magnesium	ppm	ASTM D5185m		0	<1	0	
Calcium	ppm	ASTM D5185m		0	12	0	
Phosphorus	ppm	ASTM D5185m		49	45	65	
Zinc	ppm	ASTM D5185m		0	0	0	
Sulfur	ppm	ASTM D5185m		1963	1486	1708	
CONTAMINANTS		method	limit/base	current	history1	history2	
Silicon	ppm		>25	16	16	16	
Sodium	ppm	ASTM D5185m	0.0	4	0	2	
Potassium	ppm	ASTM D5185m	>20	<1	0	0	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2	
Particles >4μm		ASTM D7647	>20000	1584	1515	1977	
Particles >6µm		ASTM D7647	>2500	327	291	512	
Particles >14µm		ASTM D7647	>320	21	3	29	
Particles >21µm		ASTM D7647	>80	6	1	8	
Particles >38µm		ASTM D7647	>20	1	0	0	
Particles >71µm		ASTM D7647	>4	1	0	0	
Oil Cleanliness		ISO 4406 (c)	>21/18/15	18/16/12	18/15/9	18/16/12	
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2	

Acid Number (AN) mg KOH/g ASTM D8045


0.47


0.49


0.56





OIL ANALYSIS REPORT









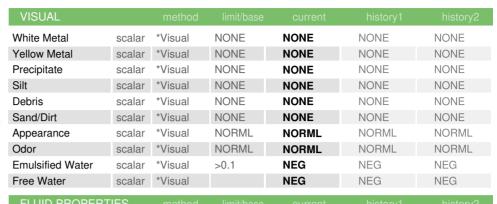

FLUID FROFER	IIES	memou			HISTOLAL	HISTORY
Visc @ 40°C	cSt	ASTM D445	99.1	144	141	138

SAMPLE IMAGE	S r

Color


Bottom









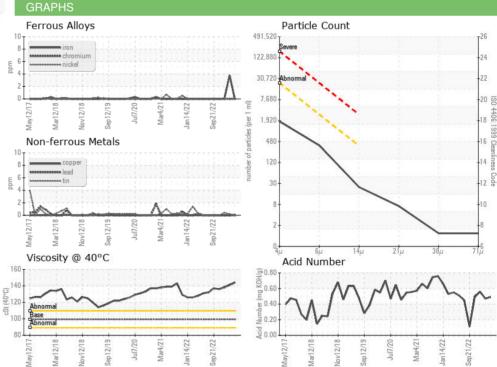





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: WC0745752 : 05922155 : 10602102

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received

: 11 Aug 2023 Diagnosed : 14 Aug 2023 Diagnostician

: Jonathan Hester

Test Package : IND 2 (Additional Tests: PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

GREENE VALLEY LANDFILL

9 SOUTH 610 GREENE ROAD NAPERVILLE, IL

US 60565 Contact: CHRIS ADEN

> caden@wm.com T: (630)743-4479

F: (630)983-1535