


# **OIL ANALYSIS REPORT**

Sample Rating Trend



**NORMAL** 



# KAESER 7540778

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

### Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Jun 202	1 Mar2022	Feb 2023 Ju	12023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA005534	KCP55099	KCP44736
Sample Date		Client Info		31 Jul 2023	16 Feb 2023	29 Mar 2022
Machine Age	hrs	Client Info		5363	3465	2373
Oil Age	hrs	Client Info		0	1091	2374
Oil Changed		Client Info		N/A	Not Changd	Changed
Sample Status				NORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	3	<1	2
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	9	6	3
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	13	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	90	7	48	35
Calcium	ppm	ASTM D5185m	2	<1	<1	0
Phosphorus	ppm	ASTM D5185m		3	0	4
Zinc	ppm	ASTM D5185m		2	12	8
Sulfur	ppm	ASTM D5185m		20613	19358	16687
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		4	13	7
Potassium	ppm	ASTM D5185m	>20	1	5	6
Water	%	ASTM D6304	>0.05	0.011	0.026	0.016
ppm Water	ppm	ASTM D6304	>500	119.2	265.2	169.5
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		686	6219	1129
Particles >6µm		ASTM D7647	>1300	211	<u>▲</u> 1830	233
Particles >14µm		ASTM D7647	>80	22	<u> </u>	18
Particles >21µm		ASTM D7647	>20	4	<b>△</b> 31	6
Particles >38µm		ASTM D7647	>4	0	4	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	17/15/12	<u>^</u> 20/18/14	15/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2



## **OIL ANALYSIS REPORT**

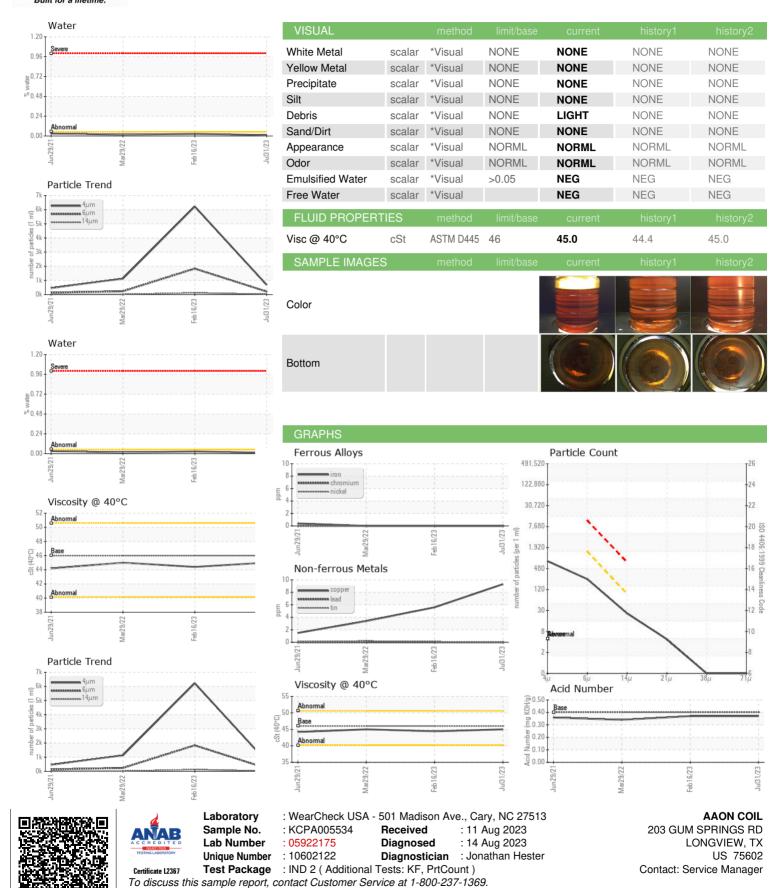

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: