


PROBLEM SUMMARY

KAESER AIRCENTER 7.5 4645782 (S/N 1032)

Compressor



COMPONENT CONDITION SUMMARY

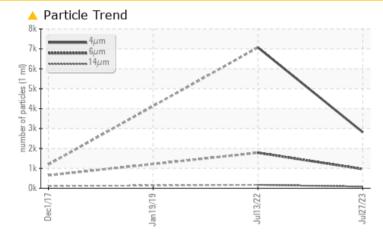

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS							
Sample Status			ATTENTION	ABNORMAL	ABNORMAL		
Particles >14µm	ASTM D7647	>80	<u> </u>	🔺 171			
Oil Cleanliness	ISO 4406 (c)	>/17/13	19/17/14	🔺 20/18/15			


Customer Id: CREIRV Sample No.: KCPA005501 Lab Number: 05922180 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 <u>jhester@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

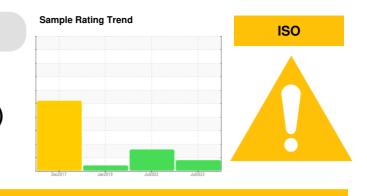

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

13 Jul 2022 Diag: Don Baldridge

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

19 Jan 2019 Diag: Jonathan Hester



01 Dec 2017 Diag: Doug Bogart

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

view report



Oil and filter change at the time of sampling has been noted. We recommend an early resample in 500 hours to monitor this condition.All component wear rates are normal. There is a moderate amount of particulates present in the oil. Free water present. There is a light concentration of water present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.





OIL ANALYSIS REPORT

Sample Rating Trend

KAESER AIRCENTER 7.5 4645782 (S/N 1032)

Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


IATION	method	limit/base	current	history i	history2
	Client Info		KCPA005501	KCP51530	KCP00860
	Client Info		27 Jul 2023	13 Jul 2022	19 Jan 2019
hrs	Client Info		2499	2295	1536
hrs	Client Info		0	759	227
	Client Info		N/A	Changed	Changed
			ATTENTION	ABNORMAL	ABNORMAL
	method	limit/base	current	history1	history2
ppm	ASTM D5185m	>50	<1	0	2
	ASTM D5185m	>10	0	0	0
	ASTM D5185m	>3	0	0	<1
ppm	ASTM D5185m	>3	0	0	0
ppm	ASTM D5185m	>2	0	0	0
ppm	ASTM D5185m	>10	1	<1	0
ppm	ASTM D5185m	>10	0	0	0
ppm	ASTM D5185m	>50	7	24	9
ppm	ASTM D5185m	>10	0	<1	<1
ppm	ASTM D5185m				0
ppm	ASTM D5185m		<1	0	0
ppm	ASTM D5185m		0	0	0
	method	limit/base	current	history1	history2
nnm					<1
					<1
			-		0
		0	-		<1
		100			29
					<1
			-		<1
					56
		•			26027
ppin	ACTIVI DOTODITI	20000		21000	
		11 11 11			
	method	limit/base	current	history1	history2
ppm	ASTM D5185m		<1	0	<mark>history2</mark> <1
ppm ppm	ASTM D5185m ASTM D5185m	>25	<1 12	0	history2 <1 12
ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20	<1 12 <1	0 0 1	history2 <1 12 2
ppm ppm ppm %	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>25 >20 >0.05	<1 12 <1 0.020	0 0 1 0.005	history2 <1 12 2 0.012
ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20 >0.05	<1 12 <1	0 0 1	history2 <1 12 2 0.012 120
ppm ppm ppm %	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>25 >20 >0.05	<1 12 <1 0.020	0 0 1 0.005	history2 <1 12 2 0.012
ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>25 >20 >0.05 >500 limit/base	<1 12 <1 0.020 202.3 current 2815	0 0 1 0.005 52.2 history1 7067	history2 <1 12 2 0.012 120
ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base	<1 12 <1 0.020 202.3 <u>current</u> 2815 965	0 0 1 0.005 52.2 history1 7067 ▲ 1783	history2 <1 12 2 0.012 120 history2
ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80	<1 12 <1 0.020 202.3 current 2815 965 ▲ 81	0 0 1 0.005 52.2 history1 7067 ▲ 1783 ▲ 171	history2 <1 12 2 0.012 120 history2
ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80	<1 12 <1 0.020 202.3 <u>current</u> 2815 965	0 0 1 0.005 52.2 history1 7067 ▲ 1783	history2 <1
ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	<1 12 <1 0.020 202.3 current 2815 965 ▲ 81 17 1	0 0 1 0.005 52.2 history1 7067 ▲ 1783 ▲ 171	history2 <1 12 2 0.012 120 history2
ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	<1 12 <1 0.020 202.3 2815 965 81 17 1 0	0 0 1 0.005 52.2 history1 7067 ▲ 1783 ▲ 171 ▲ 60 4 0	<1
ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	<1 12 <1 0.020 202.3 current 2815 965 ▲ 81 17 1	0 0 1 0.005 52.2 history1 7067 ▲ 1783 ▲ 171 ▲ 60 4	history2 <1 12 2 0.012 120 history2
ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	<1 12 <1 0.020 202.3 2815 965 81 17 1 0	0 0 1 0.005 52.2 history1 7067 ▲ 1783 ▲ 171 ▲ 60 4 0	<1
	hrs hrs hrs ppm ppm ppm ppm ppm ppm ppm ppm ppm pp	Client InfoClient InfoNrsClient InfohrsClient InfoClient InfoClient InfoClient InfoClient InfoDrmASTM D5185mppmASTM D5185m	Client InfoClient InfoNrsClient InfoInrsClient InfoClient InfoIntoClient InfoIntoClient InfoIntoClient InfoInti/baseppmASTM D5185mSATM D5185m>30ppmASTM D5185mppmASTM D5185m <t< th=""><td>Client InfoKCPA005501InsClient Info27 Jul 2023hrsClient Info2499hrsClient Info0Client InfoN/AClient InfoM/AClient InfoM/ATomethodImit/basecurrentppmASTM D5185m>50ppmASTM D5185m>3ppmASTM D5185m>3ppmASTM D5185m>3ppmASTM D5185m>3ppmASTM D5185m>10ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m100ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m<</td><td>Client Info KCPA005501 KCP51530 Client Info 27 Jul 2023 13 Jul 2022 hrs Client Info 2499 2295 hrs Client Info 0 759 Client Info M/A Changed D ATTENTION ABNORMAL method Imit/base current history1 ppm ASTM D5185m >50 <1</td> 0 ppm ASTM D5185m >10 0 0 ppm ASTM D5185m >3 0 0 ppm ASTM D5185m >10 0 0 ppm ASTM D5185m >2 0 0 ppm ASTM D5185m >10 1 <1 ppm ASTM D5185m >10 0 0 ppm ASTM D5185m >10 0 1 ppm ASTM D5185m >10 0 1 ppm ASTM D5185m >10 0 0 ppm ASTM D5185m 0 0 0 ppm ASTM D5185m<</t<>	Client InfoKCPA005501InsClient Info27 Jul 2023hrsClient Info2499hrsClient Info0Client InfoN/AClient InfoM/AClient InfoM/ATomethodImit/basecurrentppmASTM D5185m>50ppmASTM D5185m>3ppmASTM D5185m>3ppmASTM D5185m>3ppmASTM D5185m>3ppmASTM D5185m>10ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m100ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m0ppmASTM D5185m<	Client Info KCPA005501 KCP51530 Client Info 27 Jul 2023 13 Jul 2022 hrs Client Info 2499 2295 hrs Client Info 0 759 Client Info M/A Changed D ATTENTION ABNORMAL method Imit/base current history1 ppm ASTM D5185m >50 <1


Report Id: CREIRV [WUSCAR] 05922180 (Generated: 08/14/2023 13:10:49) Rev: 1

Contact/Location: Service Manager - CREIRV




OIL ANALYSIS REPORT

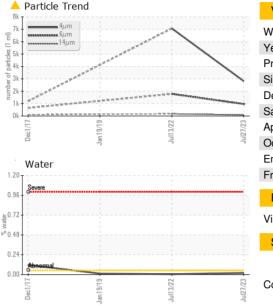

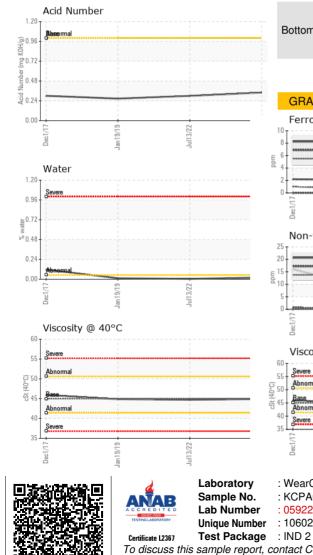

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	LIGHT	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	44.9	44.7	44.86
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color						

Bottom

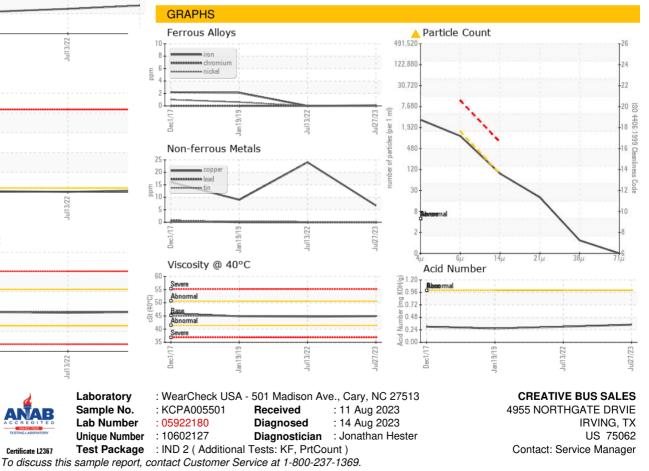

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - CREIRV