




# PROBLEM SUMMARY

Sample Rating Trend

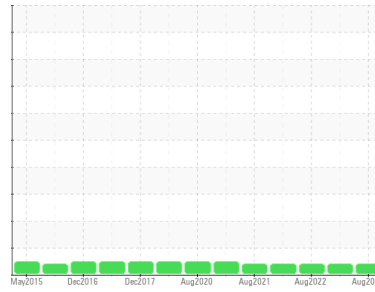

VIS DEBRIS



Machine Id  
**LINE 7 SIDE (S/N X56A0100045)**  
 Component  
**Gearbox**  
 Fluid  
**SHELL OMALA 320 (--- GAL)**

## COMPONENT CONDITION SUMMARY

No relevant graphs to display

## RECOMMENDATION

No corrective action is recommended at this time.  
 Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	ABNORMAL	ABNORMAL
Debris	scalar *Visual	NONE	▲ MODER	▲ MODER

Customer Id: TAPFRA  
 Sample No.: RP0021596  
 Lab Number: 05922276  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Angela Borella +1 800-237-1369  
[angela.borella@wearcheckusa.com](mailto:angela.borella@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

### 06 Feb 2023 Diag: Angela Borella

#### VIS DEBRIS



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 15 Aug 2022 Diag: Don Baldrige

#### VIS DEBRIS



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 02 Feb 2022 Diag: Jonathan Hester

#### VIS DEBRIS



We suspect abnormal contamination may be due to sampling method. No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report




# OIL ANALYSIS REPORT

Sample Rating Trend

VIS DEBRIS

Machine Id  
**LINE 7 SIDE (S/N X56A0100045)**

Component  
**Gearbox**  
Fluid  
**SHELL OMALA 320 (--- GAL)**

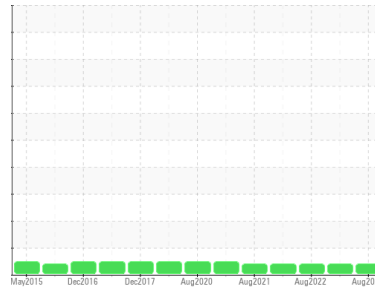

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Moderate concentration of visible dirt/debris present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>RP0021596</b>	RP0029312	RP0021527
Sample Date	Client Info		<b>07 Aug 2023</b>	06 Feb 2023	15 Aug 2022
Machine Age	mths	Client Info	<b>0</b>	0	0
Oil Age	mths	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>76</b>	40	40
Chromium	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >15	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	0	<1
Lead	ppm	ASTM D5185m >100	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >200	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m >25	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185m >5	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 5.5	<b>0</b>	<1	3
Barium	ppm	ASTM D5185m 0.4	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0.5	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 23	<b>0</b>	<1	<1
Calcium	ppm	ASTM D5185m 13	<b>3</b>	4	4
Phosphorus	ppm	ASTM D5185m 450	<b>310</b>	260	271
Zinc	ppm	ASTM D5185m 9.9	<b>7</b>	9	12




## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>3</b>	2	2
Sodium	ppm	ASTM D5185m	<b>1</b>	0	0
Potassium	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Water	%	ASTM D6304 >0.2	<b>0.003</b>	0.003	0.005
ppm Water	ppm	ASTM D6304 >2000	<b>37.4</b>	30.3	56.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.48</b>	0.53	0.48


# OIL ANALYSIS REPORT

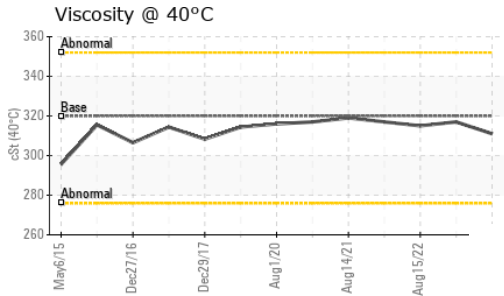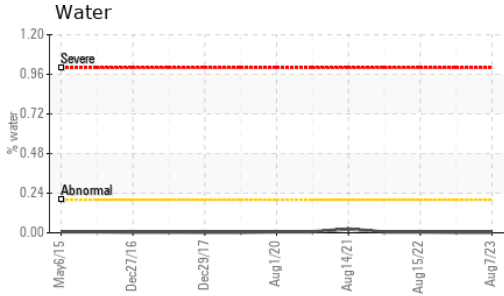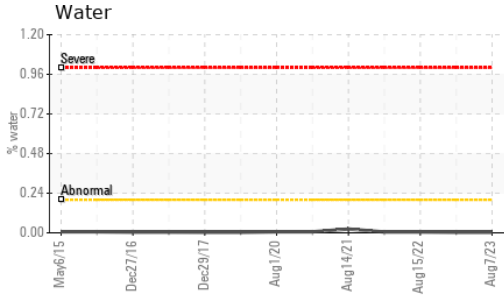





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	▲ MODER	▲ MODER	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	311	317

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

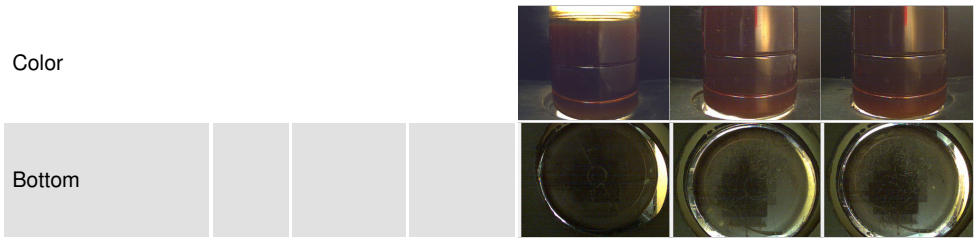

## GRAPHS

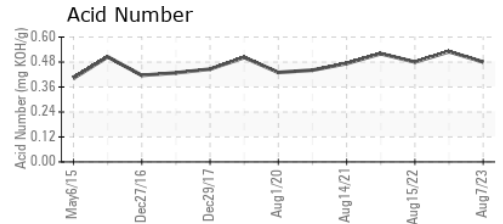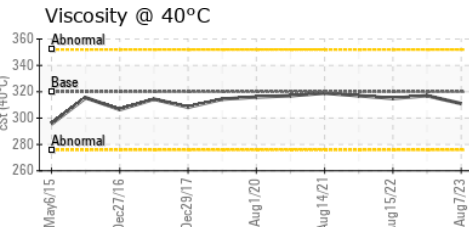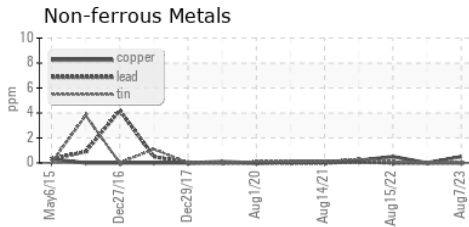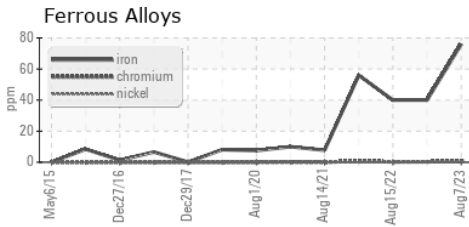

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RP0021596 **Received** : 11 Aug 2023  
**Lab Number** : 05922276 **Diagnosed** : 14 Aug 2023  
**Unique Number** : 10602223 **Diagnostician** : Angela Borella  
**Test Package** : IND 2

**WESTLAKE CHEMICAL - FRANKLIN**  
 200 SHOTWELL DR  
 FRANKLIN, OH  
 US 45005  
 Contact: Bill Eisaman  
 bill.eisaman@westlake.net  
 T: (419)788-9155  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)