
<u>Sullivan</u>

OIL ANALYSIS REPORT

PAL 32 FS CURTIS 05H100001 - ADM

Compressor

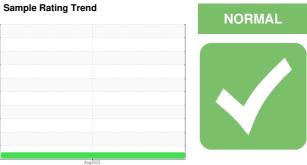

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | | Aug2023 | | |
|------------------|----------|-----------------|-----------------|-------------|----------------|---------------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| | VIATION | | IIIIII/Dase | | | HISTOTYZ |
| Sample Number | | Client Info | | UCS05922290 | | |
| Sample Date | | Client Info | | 03 Aug 2023 | | |
| Machine Age | hrs | Client Info | | 10403 | | |
| Oil Age | hrs | Client Info | | 1200 | | |
| Oil Changed | | Client Info | | Changed | | |
| Sample Status | | | | NORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | <1 | | |
| Chromium | ppm | ASTM D5185m | >10 | 0 | | |
| Nickel | ppm | ASTM D5185m | | <1 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >25 | 1 | | |
| Lead | ppm | ASTM D5185m | >25 | 0 | | |
| Copper | ppm | ASTM D5185m | >50 | <1 | | |
| Tin | ppm | ASTM D5185m | >15 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVEC | • • | and the section | Para Difference | | le faction and | la la tarre O |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 1 | 0 | | |
| Barium | ppm | ASTM D5185m | 730 | 0 | | |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | | |
| Manganese | ppm | ASTM D5185m | 0.0 | <1 | | |
| Magnesium | ppm | ASTM D5185m | 0 | <1 | | |
| Calcium | ppm | ASTM D5185m | 0 | 0 | | |
| Phosphorus | ppm | ASTM D5185m | 0 | 439 | | |
| Zinc | ppm | ASTM D5185m | 0 | 0 | | |
| Sulfur | ppm | ASTM D5185m | 590 | 1528 | | |
| CONTAMINANTS | 5 | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | <1 | | |
| Sodium | ppm | ASTM D5185m | | <1 | | |
| Potassium | ppm | ASTM D5185m | >20 | 1 | | |
| FLUID DEGRADA | ATION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.14 | 0.31 | | |
| VISUAL | | method | limit/base | current | history1 | history2 |
| White Metal | scalar | *Visual | NONE | NONE | | |
| Yellow Metal | scalar | *Visual | NONE | NONE | | |
| Precipitate | scalar | *Visual | NONE | NONE | | |
| Silt | scalar | *Visual | NONE | NONE | | |
| Debris | scalar | *Visual | NONE | NONE | | |
| Sand/Dirt | scalar | *Visual | NONE | NONE | | |
| Appearance | scalar | *Visual | NORML | NORML | | |
| Odor | scalar | *Visual | NORML | NORML | | |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | | |
| Free Water | scalar | *Visual | 20.1 | NEG | | |
| | | | | | | |

Sullivan

OIL ANALYSIS REPORT

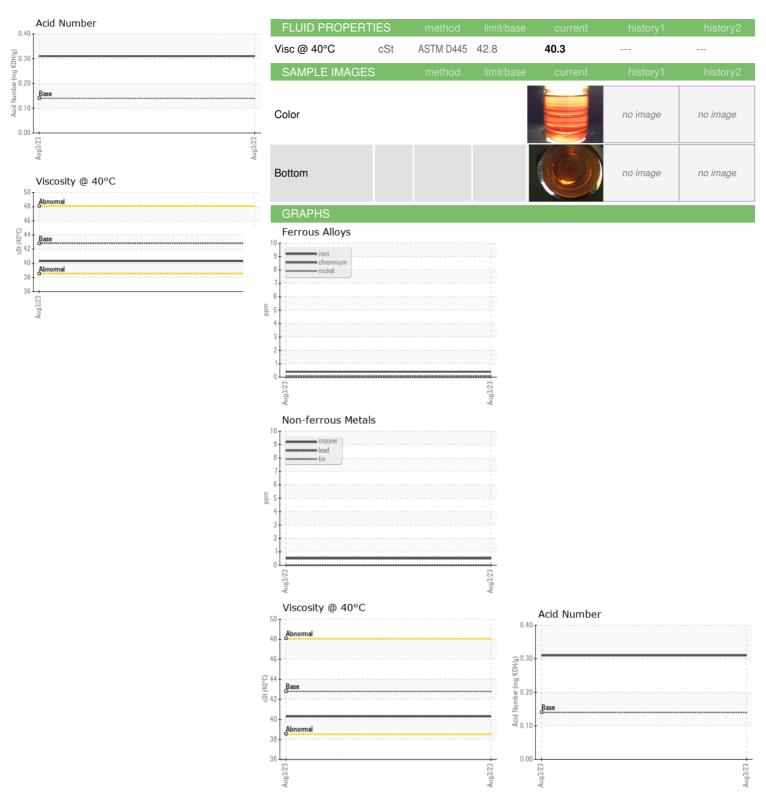





Certificate L2367

Laboratory

Sample No. Lab Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Unique Number : 10602237

: UCS05922290 : 05922290 Test Package : IND 2

Received Diagnosed

: 11 Aug 2023

: 14 Aug 2023 Diagnostician : Don Baldridge

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) **JEMCO-MAXAIR**

WEST FARGO, ND US 58078

Contact: DALE K dalek@jemco-maxair.com

T: (701)281-0362 F: x: