




# OIL ANALYSIS REPORT

Sample Rating Trend

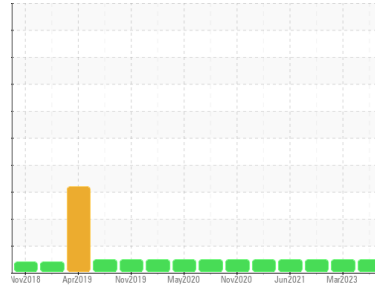

**NORMAL**



Area  
**Stoneway Concrete Renton**  
 Machine Id  
**[Stoneway Concrete Renton] 10-520**  
 Component  
**Diesel Engine**  
 Fluid  
**CASTROL Vecton LD 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PE0002240</b>	PE0001825	PE12292738
Sample Date	Client Info		<b>28 Jul 2023</b>	08 Mar 2023	30 Sep 2021
Machine Age	hrs	Client Info	<b>9578</b>	8805	6498
Oil Age	hrs	Client Info	<b>773</b>	1351	615
Oil Changed	Client Info		<b>N/A</b>	Changed	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>7</b>	11	8
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	5	2
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	<1	1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	0
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>79</b>	43	46
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>7</b>	43	67
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	<b>58</b>	392	1107
Calcium	ppm	ASTM D5185m	<b>2188</b>	1797	1072
Phosphorus	ppm	ASTM D5185m	<b>991</b>	974	1117
Zinc	ppm	ASTM D5185m	<b>1204</b>	1247	1349
Sulfur	ppm	ASTM D5185m	<b>4172</b>	3542	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	3	3
Sodium	ppm	ASTM D5185m	<b>2</b>	1	1
Potassium	ppm	ASTM D5185m >20	<b>9</b>	18	3



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.5	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.7</b>	9.9	11
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.4</b>	22.6	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.9</b>	19.5	19
Base Number (BN)	mg KOH/g	ASTM D2896	<b>5.8</b>	6.1	7.29





# OIL ANALYSIS REPORT

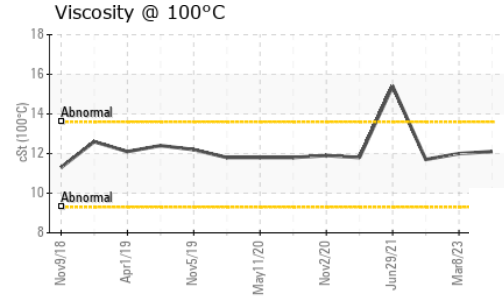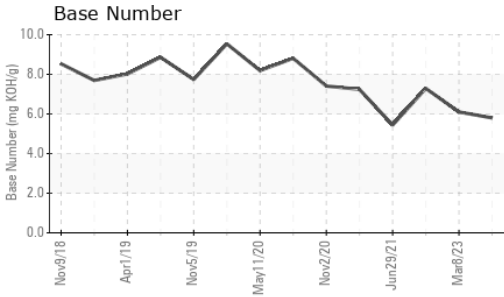

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>12.1</b>	12.0	11.7

## GRAPHS

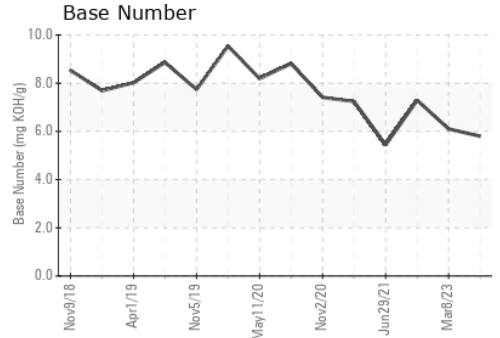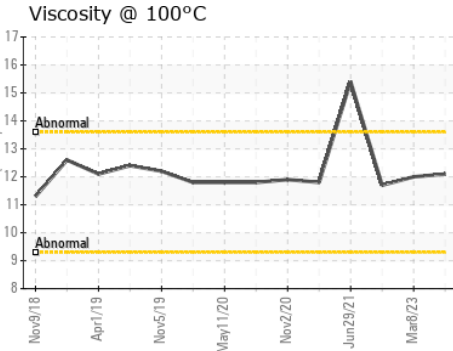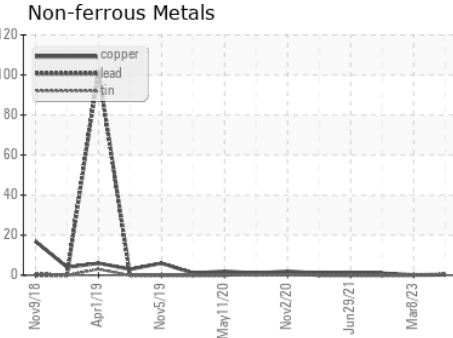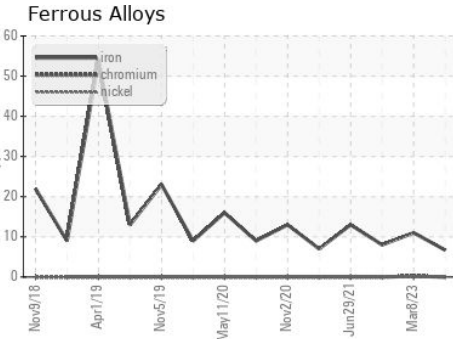

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PE0002240 **Received** : 11 Aug 2023  
**Lab Number** : **05922648** **Diagnosed** : 14 Aug 2023  
**Unique Number** : 10602595 **Diagnostician** : Don Baldrige  
**Test Package** : CONST ( Additional Tests: FT-IR, ICP, KV100, SCREEN, TBN )

**Gary Merlino Construction - Off Road Shop**  
 9125 10TH AVE SOUTH  
 SEATTLE, WA  
 US 98108  
 Contact: Tony  
 oilsamples@gmccinc.com

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)