




# OIL ANALYSIS REPORT

Sample Rating Trend

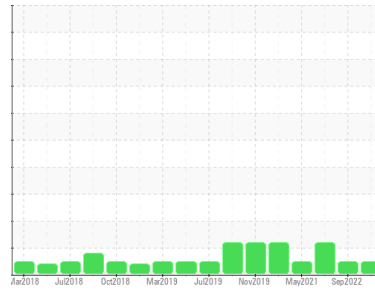

**NORMAL**



Area  
**GM Seattle Off Road Shop**  
 Machine Id  
**[GM Seattle Off Road Shop] 26-523**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON DELO 400 LE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PE0002197</b>	PE0000113	PE12291007
Sample Date	Client Info			<b>17 Jul 2023</b>	27 Sep 2022	07 Jan 2022
Machine Age	hrs Client Info			<b>7662</b>	7068	6885
Oil Age	hrs Client Info			<b>594</b>	493	310
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	MARGINAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>10</b>	11	6
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	1	1
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>4</b>	4	3
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	0
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>55</b>	31	36
Barium	ppm	ASTM D5185m		<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m		<b>45</b>	24	27
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>687</b>	396	453
Calcium	ppm	ASTM D5185m		<b>1695</b>	1811	2047
Phosphorus	ppm	ASTM D5185m	1200	<b>1077</b>	931	1085
Zinc	ppm	ASTM D5185m	1300	<b>1277</b>	1114	1250
Sulfur	ppm	ASTM D5185m	3200	<b>4360</b>	3912	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	3	2
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	2
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.4	0.35
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.6</b>	7.3	7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.2</b>	18.4	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>12.0</b>	11.4	12
Base Number (BN)	mg KOH/g	ASTM D2896	9.6	<b>8.5</b>	9.0	▲ 4.54





# OIL ANALYSIS REPORT

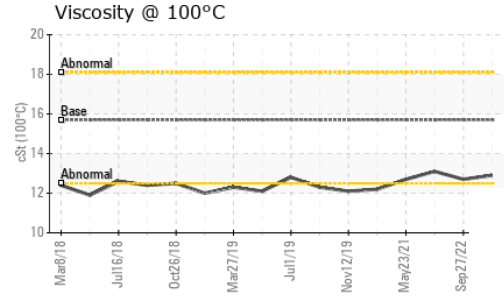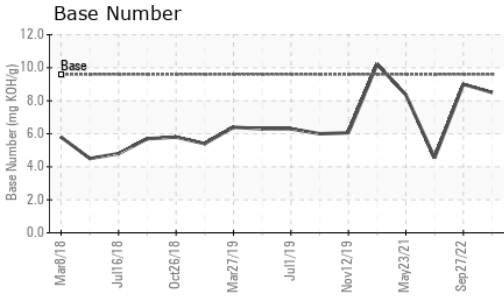

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.7	<b>12.9</b>	12.7	13.1

### GRAPHS

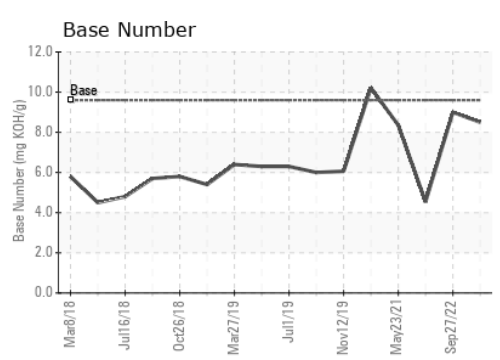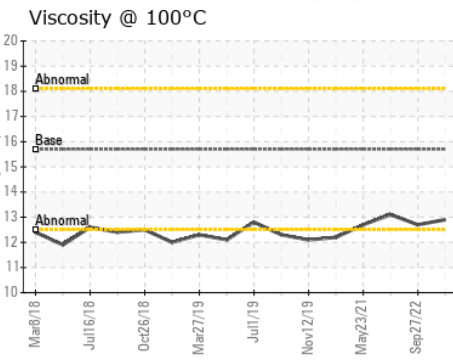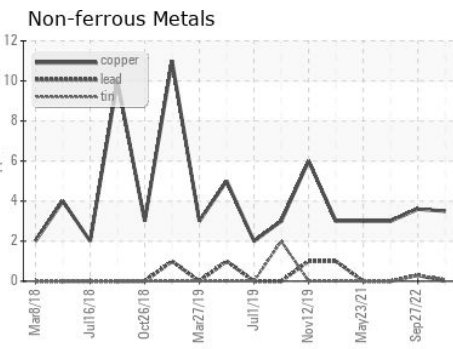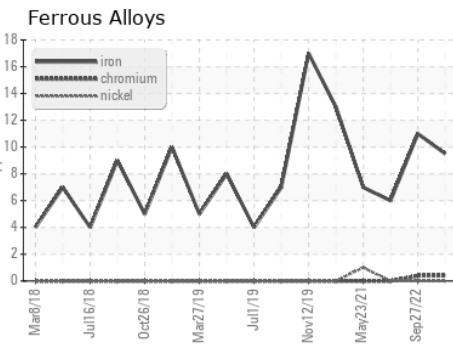

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PE0002197 **Received** : 11 Aug 2023  
**Lab Number** : **05922754** **Diagnosed** : 14 Aug 2023  
**Unique Number** : 10602701 **Diagnostician** : Don Baldrige  
**Test Package** : CONST ( Additional Tests: FT-IR, ICP, KV100, SCREEN, TBN )

**Gary Merlino Construction - Off Road Shop**  
 9125 10TH AVE SOUTH  
 SEATTLE, WA  
 US 98108  
 Contact: Jesse Patterson  
 oilsamples@gmccinc.com  
 T: 1(866)292-1303  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)