




OIL ANALYSIS REPORT

Sample Rating Trend

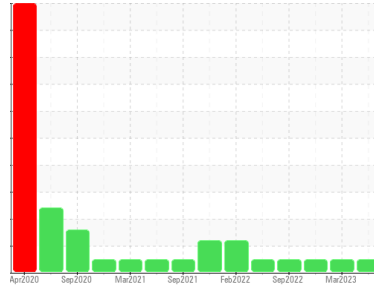

NORMAL



Area
GM Seattle Off Road Shop
 Machine Id
[GM Seattle Off Road Shop] 16-760
 Component
Diesel Engine
 Fluid
CASTROL CRB Multi 15W-40 CK-4 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PE0001089	PE0001086	PE0000364
Sample Date	Client Info		26 Jul 2023	08 Mar 2023	15 Nov 2022
Machine Age	hrs	Client Info	6142	5382	4828
Oil Age	hrs	Client Info	760	1789	1235
Oil Changed	Client Info		Oil Added	Changed	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	16	35	22
Chromium	ppm	ASTM D5185m >4	<1	2	2
Nickel	ppm	ASTM D5185m >2	0	0	0
Titanium	ppm	ASTM D5185m	0	<1	<1
Silver	ppm	ASTM D5185m >2	<1	<1	<1
Aluminum	ppm	ASTM D5185m >25	4	6	5
Lead	ppm	ASTM D5185m >45	2	9	3
Copper	ppm	ASTM D5185m >85	3	6	6
Tin	ppm	ASTM D5185m >4	<1	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	45	14	19
Barium	ppm	ASTM D5185m	0	0	2
Molybdenum	ppm	ASTM D5185m	70	41	43
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	120	449	418
Calcium	ppm	ASTM D5185m	2250	1950	1968
Phosphorus	ppm	ASTM D5185m	1056	965	986
Zinc	ppm	ASTM D5185m	1302	1245	1206
Sulfur	ppm	ASTM D5185m	4151	3843	4362

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	7	8	7
Sodium	ppm	ASTM D5185m	5	6	3
Potassium	ppm	ASTM D5185m >20	6	15	12



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.5	1	0.8
Nitration	Abs/cm	*ASTM D7624 >20	10.5	11.5	11.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.4	26.2	25.3

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	17.8	21.1	19.2
Base Number (BN)	mg KOH/g	ASTM D2896 10	5.7	5.4	7.1





OIL ANALYSIS REPORT

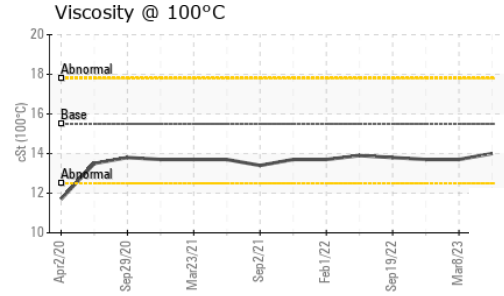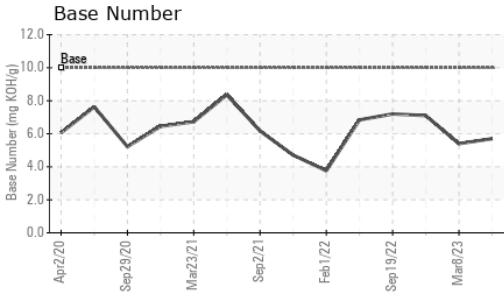

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.5	14.0	13.7	13.7

GRAPHS

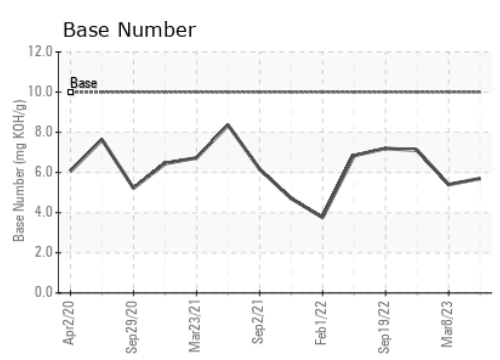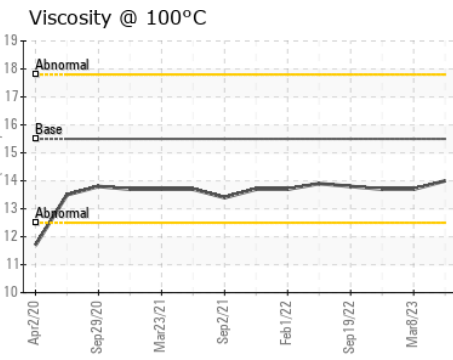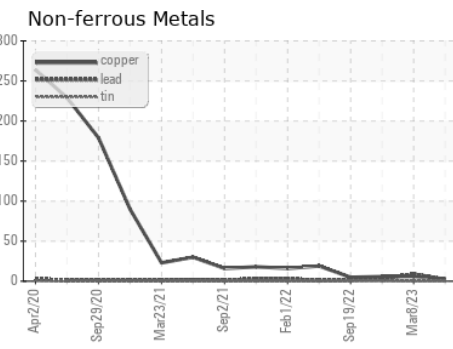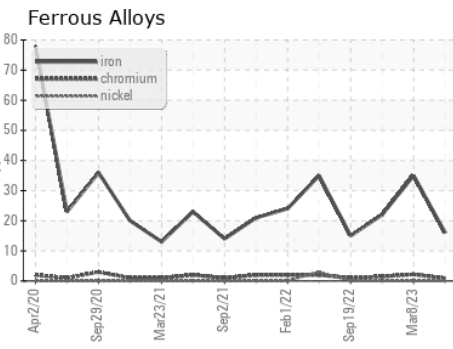

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0001089 **Received** : 11 Aug 2023
Lab Number : **05922755** **Diagnosed** : 14 Aug 2023
Unique Number : 10602702 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: FT-IR, ICP, KV100, SCREEN, TBN)

Gary Merlino Construction - Off Road Shop
 9125 10TH AVE SOUTH
 SEATTLE, WA
 US 98108
 Contact: Jesse Patterson
 oilsamples@gmccinc.com
 T: 1(866)292-1303
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)