




# OIL ANALYSIS REPORT

Sample Rating Trend

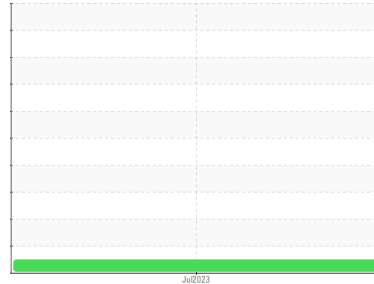

**NORMAL**



Machine Id  
**8479026 (S/N 1231)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KC101163</b>	---	---
Sample Date	Client Info		<b>31 Jul 2023</b>	---	---
Machine Age	hrs Client Info		<b>6421</b>	---	---
Oil Age	hrs Client Info		<b>4119</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>50	<b>0</b>	---	---
Chromium	ppm ASTM D5185m	>10	<b>0</b>	---	---
Nickel	ppm ASTM D5185m	>3	<b>0</b>	---	---
Titanium	ppm ASTM D5185m	>3	<b>0</b>	---	---
Silver	ppm ASTM D5185m	>2	<b>0</b>	---	---
Aluminum	ppm ASTM D5185m	>10	<b>1</b>	---	---
Lead	ppm ASTM D5185m	>10	<b>0</b>	---	---
Copper	ppm ASTM D5185m	>50	<b>9</b>	---	---
Tin	ppm ASTM D5185m	>10	<b>0</b>	---	---
Vanadium	ppm ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium	ppm ASTM D5185m		<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m		<b>0</b>	---	---
Barium	ppm ASTM D5185m	90	<b>0</b>	---	---
Molybdenum	ppm ASTM D5185m		<b>0</b>	---	---
Manganese	ppm ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm ASTM D5185m	90	<b>0</b>	---	---
Calcium	ppm ASTM D5185m	2	<b>0</b>	---	---
Phosphorus	ppm ASTM D5185m		<b>3</b>	---	---
Zinc	ppm ASTM D5185m		<b>0</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>25	<b>&lt;1</b>	---	---
Sodium	ppm ASTM D5185m		<b>&lt;1</b>	---	---
Potassium	ppm ASTM D5185m	>20	<b>0</b>	---	---
Water	% ASTM D6304	>0.05	<b>0.005</b>	---	---
ppm Water	ppm ASTM D6304	>500	<b>56.5</b>	---	---



## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>188</b>	---	---
Particles >6µm	ASTM D7647	>1300	<b>78</b>	---	---
Particles >14µm	ASTM D7647	>80	<b>12</b>	---	---
Particles >21µm	ASTM D7647	>20	<b>5</b>	---	---
Particles >38µm	ASTM D7647	>4	<b>0</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	<b>15/13/11</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	0.4	<b>0.35</b>	---	---


# OIL ANALYSIS REPORT

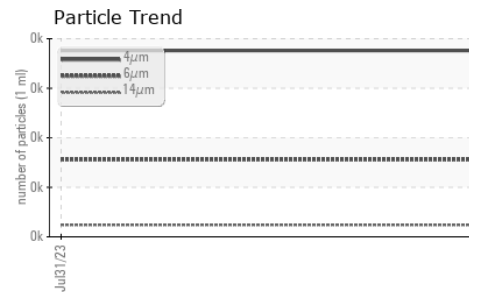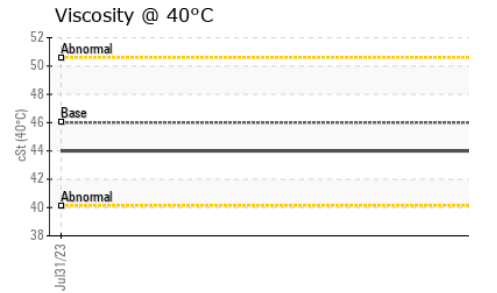






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.0	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

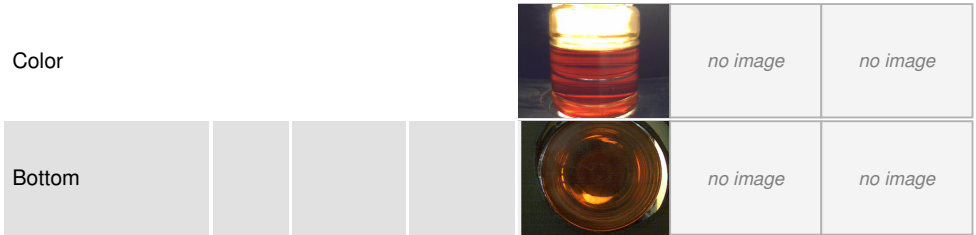

## GRAPHS

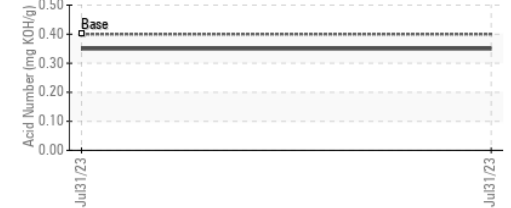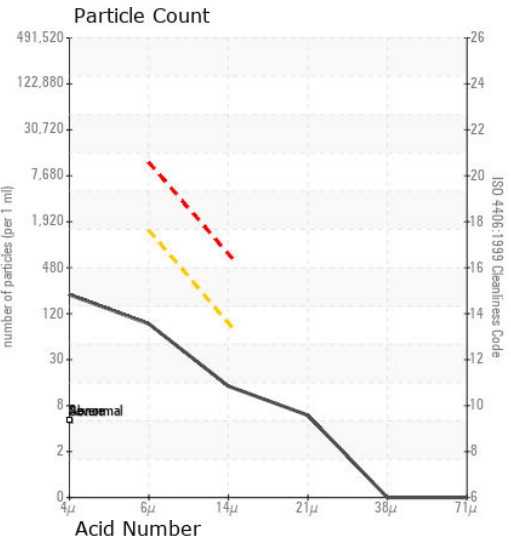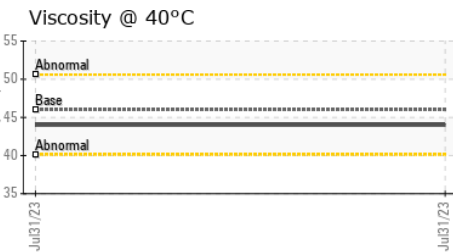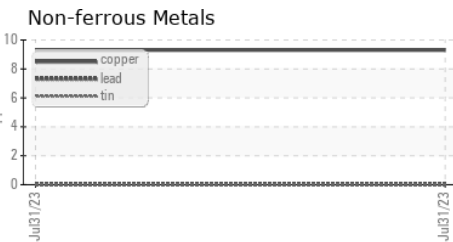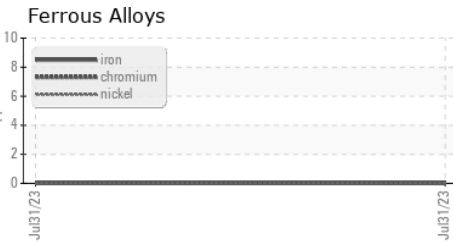

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC101163  
**Lab Number** : 05922823  
**Unique Number** : 10602770  
**Test Package** : IND 2

**NEWS PAPER PRINTING COMPANY**  
 5210 S LOIS AVE  
 TAMPA, FL  
 US 33611  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: