




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**OKLAHOMA/3/EG - TRUCK-OFF-HWY-HEAVY HAUL**  
 Machine Id  
**69.79L [OKLAHOMA^3^EG - TRUCK-OFF-HWY-HEAVY HAUL]**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

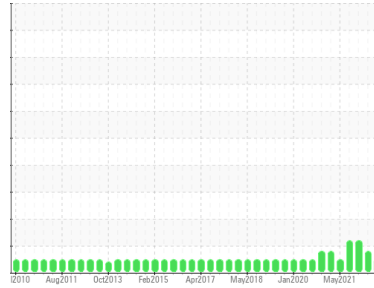

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0834067</b>	WC0800746	WC0758763
Sample Date	Client Info		<b>05 Aug 2023</b>	09 May 2023	23 Nov 2022
Machine Age	hrs	Client Info	<b>19394</b>	19064	18661
Oil Age	hrs	Client Info	<b>275</b>	18661	17117
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	MARGINAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	▲ 3.4	▲ 4.9
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>26</b>	40	65
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	1	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>3</b>	3	5
Lead	ppm	ASTM D5185m >40	<b>1</b>	2	4
Copper	ppm	ASTM D5185m >330	<b>5</b>	6	8
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>52</b>	41	28
Barium	ppm	ASTM D5185m 0	<b>2</b>	2	0
Molybdenum	ppm	ASTM D5185m 0	<b>45</b>	42	38
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 0	<b>488</b>	476	474
Calcium	ppm	ASTM D5185m	<b>1801</b>	1685	1702
Phosphorus	ppm	ASTM D5185m	<b>785</b>	755	705
Zinc	ppm	ASTM D5185m	<b>950</b>	897	832
Sulfur	ppm	ASTM D5185m	<b>2900</b>	2609	2732

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	5	5
Sodium	ppm	ASTM D5185m	<b>4</b>	2	4
Potassium	ppm	ASTM D5185m >20	<b>10</b>	6	9

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1</b>	1.1	1.8
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.2</b>	9.2	12.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.1</b>	24.0	26.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.0</b>	20.7	23.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	<b>9.7</b>	9.5	9.2







# OIL ANALYSIS REPORT

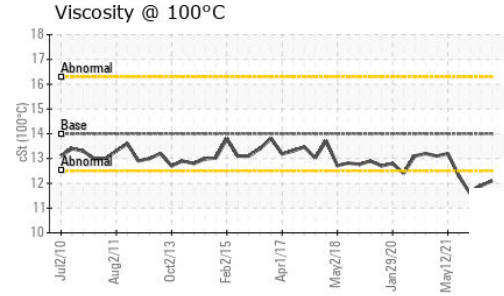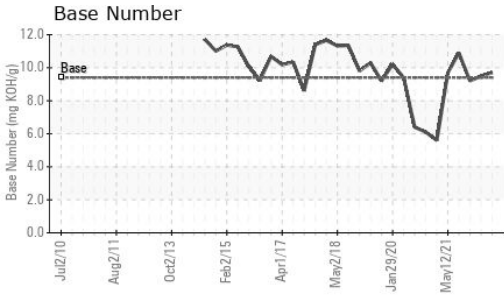

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	<b>12.1</b>	11.9	▲ 11.6

## GRAPHS

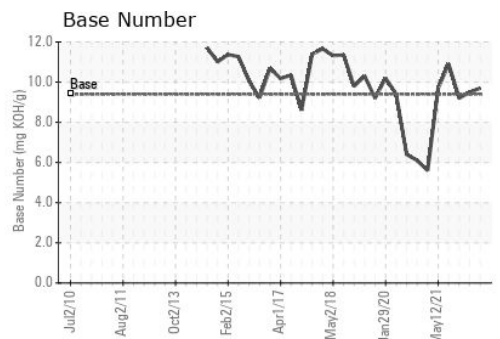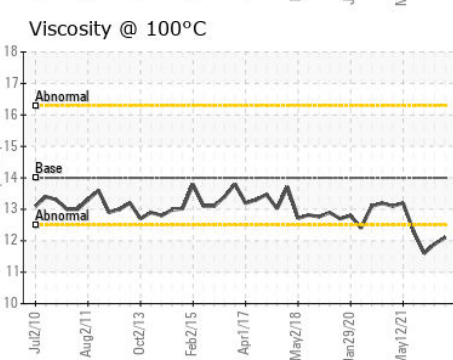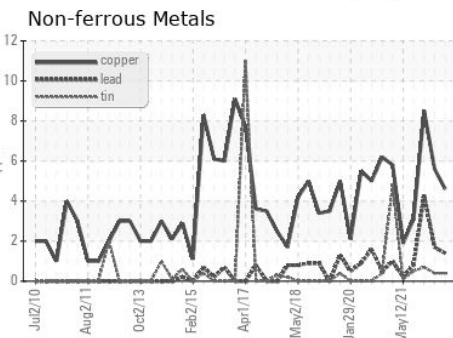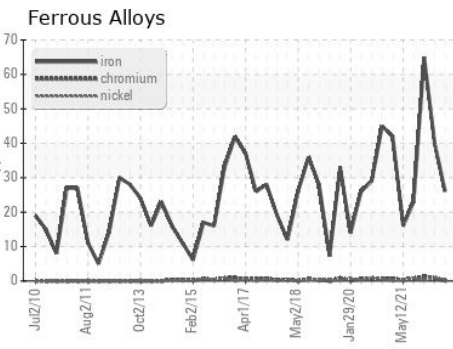

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0834067 **Received** : 14 Aug 2023  
**Lab Number** : **05923178** **Diagnosed** : 14 Aug 2023  
**Unique Number** : 10603125 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)