




PROBLEM SUMMARY

Area
OKLAHOMA/102/EG - OTHER SERVICE
 Machine Id
06.55 [OKLAHOMA^102^EG - OTHER SERVICE]
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)



Sample Rating Trend

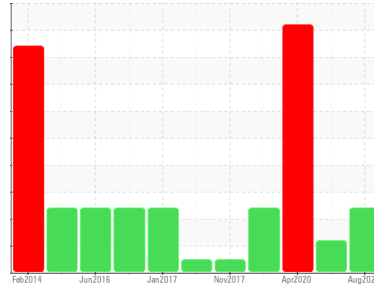

FUEL



COMPONENT CONDITION SUMMARY

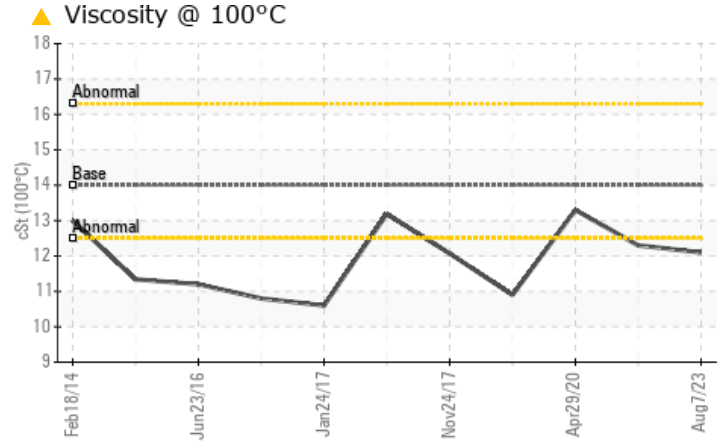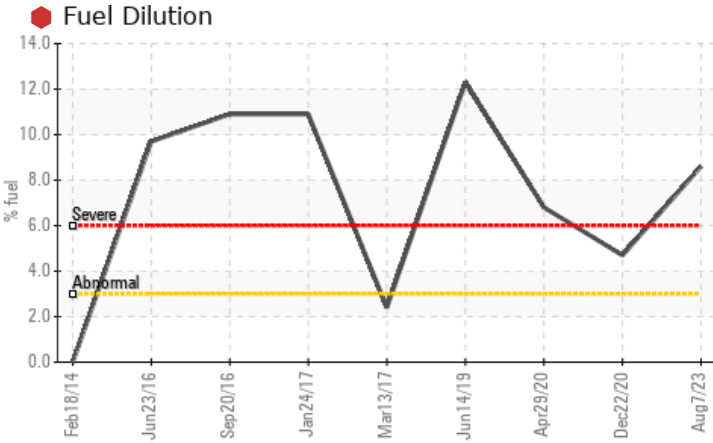

RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	ABNORMAL	SEVERE
Fuel	%	ASTM D3524 >3.0	8.6	4.7	6.8
Visc @ 100°C	cSt	ASTM D445 14	12.1	12.3	13.3

Customer Id: SHEWIC
 Sample No.: WC0834017
 Lab Number: 05923194
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

22 Dec 2020 Diag: Jonathan Hester

FUEL



We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

[view report](#)



29 Apr 2020 Diag: Doug Bogart

WEAR



We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition. Cylinder, crank, or cam shaft wear is indicated. Valve wear is indicated. Bearing and/or bushing wear is indicated. There is a moderate amount of fuel present in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

[view report](#)



14 Jun 2019 Diag: Jonathan Hester

FUEL



We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.


[view report](#)





OIL ANALYSIS REPORT

Sample Rating Trend

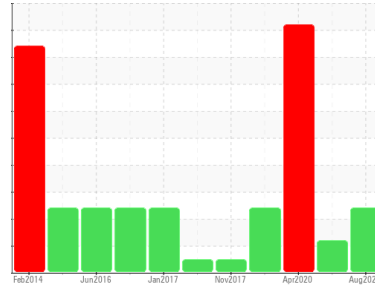

FUEL



Area
OKLAHOMA/102/EG - OTHER SERVICE
 Machine Id
06.55 [OKLAHOMA^102^EG - OTHER SERVICE]

Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0834017	WC0521082	WC0451211
Sample Date	Client Info		07 Aug 2023	22 Dec 2020	29 Apr 2020
Machine Age	hrs	Client Info	10198	600	233525
Oil Age	hrs	Client Info	300	300	0
Oil Changed	Client Info		Changed	Changed	N/A
Sample Status			SEVERE	ABNORMAL	SEVERE

CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	36	102	252
Chromium	ppm	ASTM D5185m >20	<1	2	6
Nickel	ppm	ASTM D5185m >2	1	2	6
Titanium	ppm	ASTM D5185m >2	<1	<1	<1
Silver	ppm	ASTM D5185m >2	<1	0	0
Aluminum	ppm	ASTM D5185m >20	3	0	10
Lead	ppm	ASTM D5185m >40	1	13	58
Copper	ppm	ASTM D5185m >330	2	9	16
Tin	ppm	ASTM D5185m >15	<1	2	5
Antimony	ppm	ASTM D5185m	---	0	0
Vanadium	ppm	ASTM D5185m	0	<1	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	42	40	47
Barium	ppm	ASTM D5185m 0	5	0	0
Molybdenum	ppm	ASTM D5185m 0	39	22	49
Manganese	ppm	ASTM D5185m	<1	1	2
Magnesium	ppm	ASTM D5185m 0	474	598	486
Calcium	ppm	ASTM D5185m	1547	1472	1965
Phosphorus	ppm	ASTM D5185m	754	735	870
Zinc	ppm	ASTM D5185m	883	838	1048
Sulfur	ppm	ASTM D5185m	2644	2191	2073

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	5	4	15
Sodium	ppm	ASTM D5185m	0	2	6
Potassium	ppm	ASTM D5185m >20	2	2	4
Fuel	%	ASTM D3524 >3.0	8.6	4.7	6.8

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	0.6	1.4	2.5
Nitration	Abs/cm	*ASTM D7624 >20	9.8	13	17.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.0	25.7	33.1


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	19.5	22.7	35.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	8.0	7.7	6.3




OIL ANALYSIS REPORT


Fuel Dilution

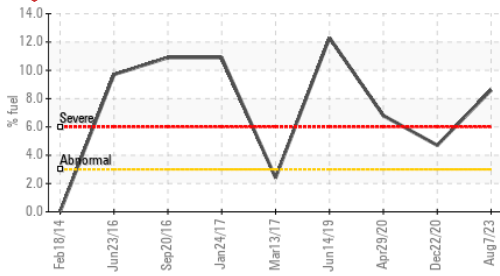

Viscosity @ 100°C

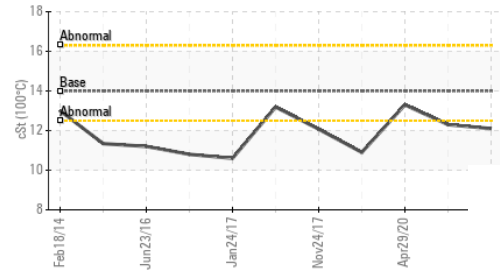

Base Number

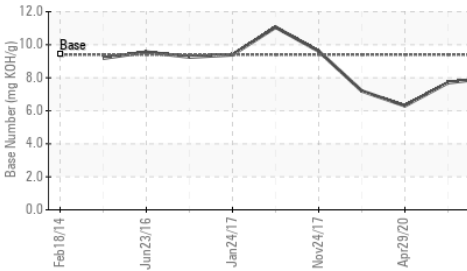


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	▲ 12.1	▲ 12.3	13.3

GRAPHS


Ferrous Alloys

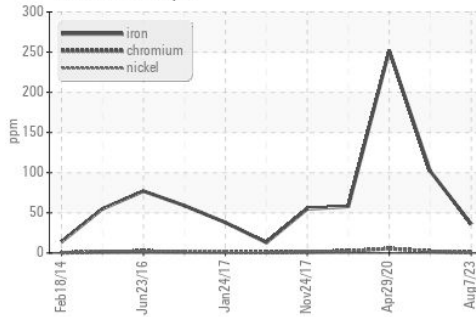


Non-ferrous Metals

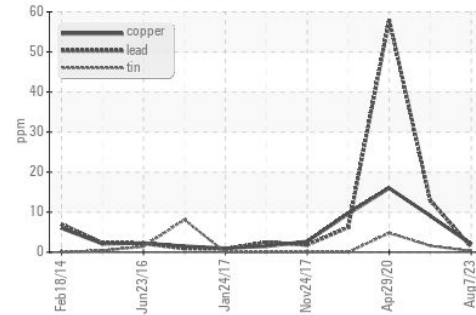

Viscosity @ 100°C

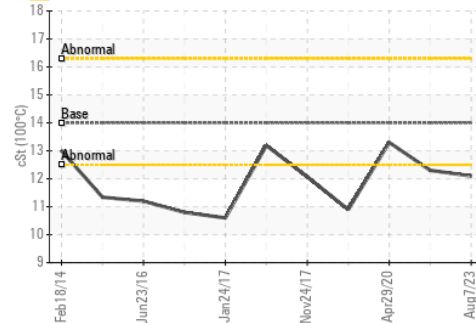

Base Number

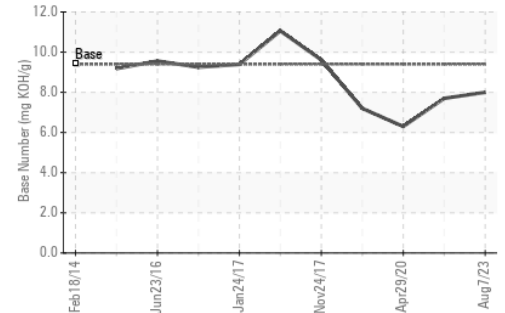

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0834017 Received : 14 Aug 2023
 Lab Number : 05923194 Diagnosed : 15 Aug 2023
 Unique Number : 10603141 Diagnostician : Wes Davis
 Test Package : CONST (Additional Tests: PercentFuel, TBN)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)