

74 BANBURY MOTOR

COMPONENT CONDITION SUMMARY

Inboard Journal Bearing


ESSO NUTO H ISO 68 (1 QTS)

^{Area} **412**

Component

Fluid

PROBLEM SUMMARY

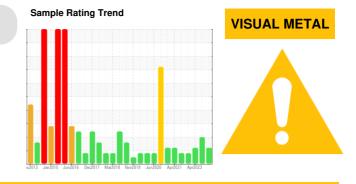

No relevant graphs to display

RECOMMENDATION

No corrective action is recommended at this time. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to metal particles present in this sample.

PROBLEMATIC TEST RESULTS						
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
White Metal	scalar	*Visual	NONE	🔺 MODER	🔺 MODER	NONE

Customer Id: BRIDES Sample No.: WC0397551 Lab Number: 05923338 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED A	CTIONS					
Action	Status	Date	Done By			
Alert			?			

Description

We were unable to perform a particle count due to metal particles present in this sample.

HISTORICAL DIAGNOSIS

05 Jul 2023 Diag: Angela Borella



The oil change at the time of sampling has been noted. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition. We were unable to perform a particle count due to metal particles present in this sample. The tin level is abnormal. Moderate concentration of visible metal present. Bearing wear is indicated. All other component wear rates are normal. No other contaminants were detected in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.



view report

09 Apr 2023 Diag: Angela Borella




The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

25 Nov 2021 Diag: Don Baldridge

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.







OIL ANALYSIS REPORT

412 Machine Id 74 BANBURY MOTOR

Component Inboard Journal Bearing Fluid ESSO NUTO H ISO 68 (1 QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to metal particles present in this sample.

🔺 Wear

Moderate concentration of visible metal present. All component wear rates are normal.

Contamination

No other contaminants were detected in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


Sample Rating Trend VISUAL METAL


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0397551	WC0569522	WC0569581
Sample Date		Client Info		07 Aug 2023	05 Jul 2023	09 Apr 2023
Machine Age	mths	Client Info		1	6	0
Oil Age	mths	Client Info		0	0	4
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		9	12	9
Iron	ppm	ASTM D5185m	>60	0	3	0
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>4	¢ <1	<1	0
Lead	ppm	ASTM D5185m		11	37	8
Copper	ppm	ASTM D5185m	>125	12	26	50
Tin	ppm	ASTM D5185m		44	<u>↓</u> 146	45
Antimony	ppm	ASTM D5185m	200			40
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	<1	0
	ррпп	ASTIVI DUTOJIII		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	<1	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	<1	<1
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	5	6	0	4
Calcium	ppm	ASTM D5185m	50	41	38	48
Phosphorus	ppm	ASTM D5185m	330	332	332	337
Zinc	ppm	ASTM D5185m	420	400	408	406
Sulfur	ppm	ASTM D5185m	3100	3093	2999	2826
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	3	3	2
Sodium						
	ppm	ASTM D5185m		2	0	0
	ppm	ASTM D5185m ASTM D5185m	>20	2 <1	0	0
	ppm		>20 limit/base		0 1 history1	
Potassium FLUID CLEANLIN Particles >4µm	ppm	ASTM D5185m method ASTM D7647	limit/base >10000	<1	1	0 history2 ▲ 108998
Potassium FLUID CLEANLIN Particles >4µm Particles >6µm	ppm	ASTM D5185m method	limit/base	<1 current	1 history1	0 history2
Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm	ASTM D5185m method ASTM D7647	limit/base >10000	<1 current 	1 history1	0 history2 ▲ 108998
Potassium FLUID CLEANLIN	ppm	ASTM D5185m method ASTM D7647 ASTM D7647	limit/base >10000 >2500 >160	<1 current 	1 history1 	0 history2 ▲ 108998 ▲ 5639
Potassium FLUID CLEANLIN Particles >4μm Particles >6μm Particles >14μm Particles >21μm	ppm	ASTM D5185m method ASTM D7647 ASTM D7647 ASTM D7647	limit/base >10000 >2500 >160	<1 current 	1 history1 	0 history2 ▲ 108998 ▲ 5639 31
Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm	ASTM D5185m method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	limit/base >10000 >2500 >160 >40 >10	<1 current 	1 history1 	0 history2 ▲ 108998 ▲ 5639 31 5
Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm	ASTM D5185m method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	limit/base >10000 >2500 >160 >40 >10	<1 current 	1 history1 	0 history2 ▲ 108998 ▲ 5639 31 5 0
Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm IESS	ASTM D5185m method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	limit/base >10000 >2500 >160 >40 >10 >3	<1 current 	1 history1 	0 history2 ▲ 108998 ▲ 5639 31 5 0 0 0
Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm Oil Cleanliness	ppm IESS	ASTM D5185m method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ISO 4406 (c)	limit/base >10000 >2500 >160 >40 >10 >3 >20/18/14	<1 current 	1 history1 	0 history2 ▲ 108998 ▲ 5639 31 5 0 0 0 0 24/20/12



OIL ANALYSIS REPORT









VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	A MODER	🔺 MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPER	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	68.8	66.5	69.0	68.1
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color						ned Journal Bearing Nek Dese <u>1/9</u> /23





Bottom

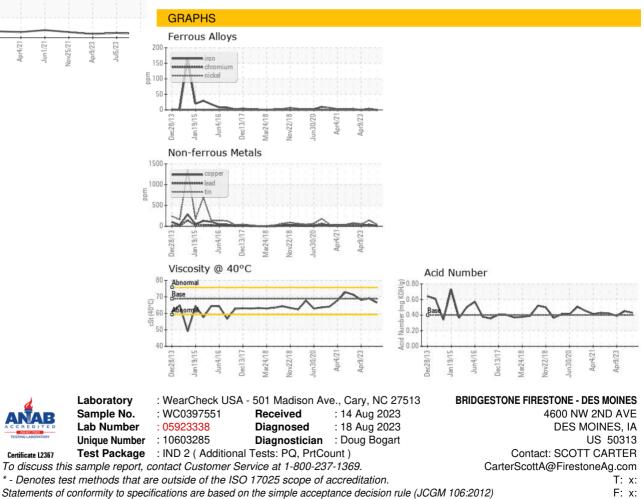

Contact/Location: SCOTT CARTER - BRIDES