


OIL ANALYSIS REPORT



Sample Rating Trend



W11 Component **Hydraulic System** MIL-PRF-83282 (--- GAL)

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target SAE AS4059 (replaces NAS 1638) cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


				Aug2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0768781		
Sample Date		Client Info		08 Aug 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>10	<1		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>75	<1		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		12		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		6		
Calcium	ppm	ASTM D5185m		0		
Phosphorus	ppm	ASTM D5185m		597		
Zinc	ppm	ASTM D5185m		15		
Sulfur	ppm	ASTM D5185m		25		
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	3		
Sodium	ppm	ASTM D5185m		1		
Potassium	ppm	ASTM D5185m	>20	<1		
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	779		
Particles >6μm		ASTM D7647	>1300	248		
Particles >14μm		ASTM D7647	>160	23		
Particles >21μm		ASTM D7647	>40	4		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/12		
FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2
Acid Number (AN)	ma KOU/a	VCTM D004E	0.1	0.20		

Acid Number (AN) mg KOH/g ASTM D8045 0.1

0.20



OIL ANALYSIS REPORT

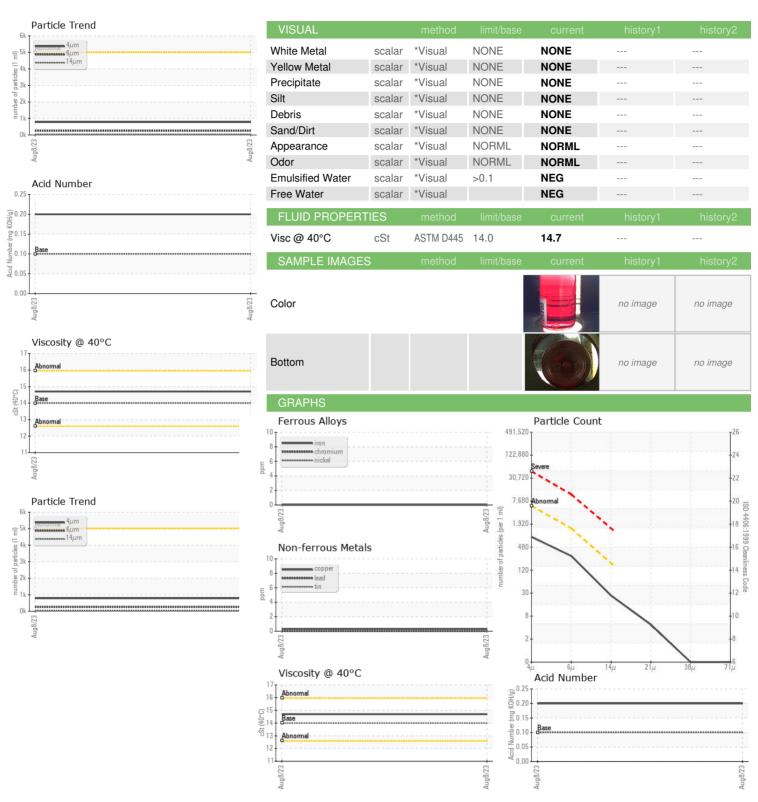





Certificate L2367

Unique Number

Laboratory Sample No. Lab Number

: WC0768781 : 05923362 : 10603309 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 14 Aug 2023 : 15 Aug 2023 Diagnosed

: Wes Davis

Diagnostician

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

DENNIS K BURKE INC

555 CONSTITUTION DR TAUNTON, MA US 02780

Contact: GREG DUNKER greg.dunker@burkeoil.com

T: (800)289-2875 F: (617)889-6422