




# OIL ANALYSIS REPORT

Sample Rating Trend

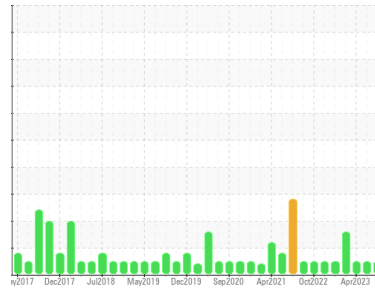

**NORMAL**



Area  
**MP-105**  
 Machine Id  
**B51036 - PUMP VACUUM BUSCH RA0630 TOPPINGS MULTIVAC (S/N U081602621)**  
 Component  
**Pump**  
 Fluid  
**PETRO CANADA PURITY FG SYNTHETIC 100 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0820589</b>	WC0810182	WC0736046
Sample Date	Client Info		<b>30 Jul 2023</b>	08 Jun 2023	03 Apr 2023
Machine Age	wks Client Info		<b>0</b>	0	0
Oil Age	wks Client Info		<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>90	<b>0</b>	1	1
Chromium	ppm ASTM D5185m	>5	<b>0</b>	0	0
Nickel	ppm ASTM D5185m	>5	<b>0</b>	<1	0
Titanium	ppm ASTM D5185m	>3	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m	>7	<b>&lt;1</b>	0	0
Lead	ppm ASTM D5185m	>12	<b>0</b>	0	0
Copper	ppm ASTM D5185m	>30	<b>&lt;1</b>	0	<1
Tin	ppm ASTM D5185m	>9	<b>&lt;1</b>	0	0
Vanadium	ppm ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m		<b>0</b>	0	0
Barium	ppm ASTM D5185m		<b>1</b>	5	0
Molybdenum	ppm ASTM D5185m		<b>0</b>	0	0
Manganese	ppm ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm ASTM D5185m		<b>7</b>	6	1
Calcium	ppm ASTM D5185m		<b>&lt;1</b>	7	<1
Phosphorus	ppm ASTM D5185m		<b>386</b>	449	397
Zinc	ppm ASTM D5185m		<b>16</b>	29	0
Sulfur	ppm ASTM D5185m		<b>1092</b>	1382	1157

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>60	<b>3</b>	1	4
Sodium	ppm ASTM D5185m		<b>4</b>	2	<1
Potassium	ppm ASTM D5185m	>20	<b>1</b>	1	1

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	<b>3492</b>	238	4223
Particles >6µm	ASTM D7647	>2500	<b>882</b>	71	1891
Particles >14µm	ASTM D7647	>320	<b>83</b>	7	222
Particles >21µm	ASTM D7647	>80	<b>24</b>	2	34
Particles >38µm	ASTM D7647	>20	<b>2</b>	0	0
Particles >71µm	ASTM D7647	>4	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>20/18/15	<b>19/17/14</b>	15/13/10	19/18/15


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	0.5	<b>0.04</b>	0.09	0.18




# OIL ANALYSIS REPORT


Particle Trend

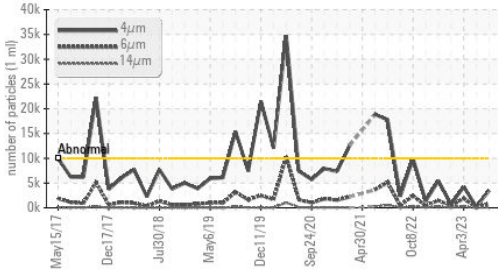


Acid Number

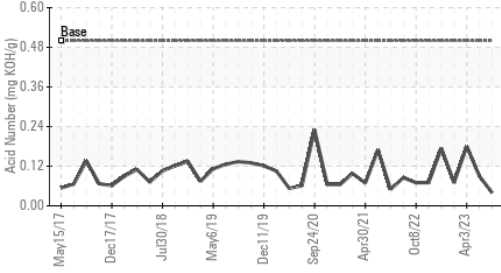

Viscosity @ 40°C

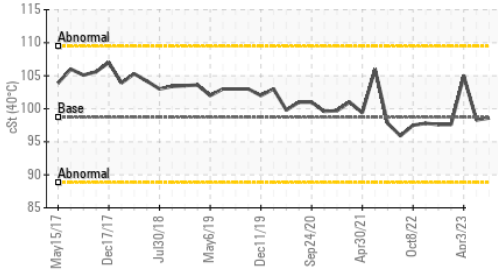


Particle Trend

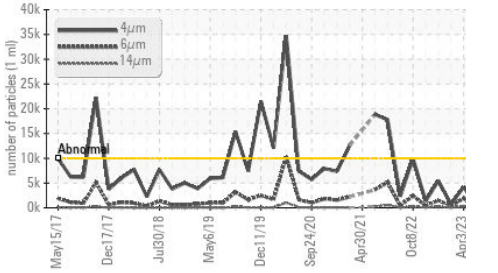

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	98.7	98.6	98.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

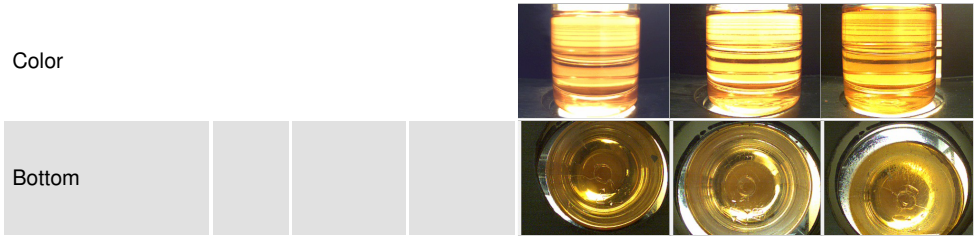


## GRAPHS


Ferrous Alloys

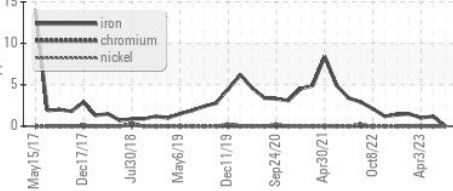


Non-ferrous Metals

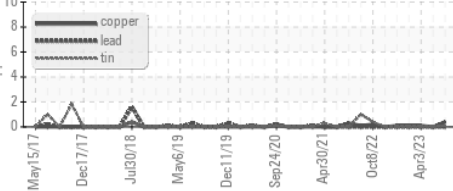


Viscosity @ 40°C

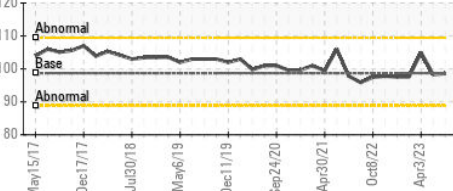

Particle Count

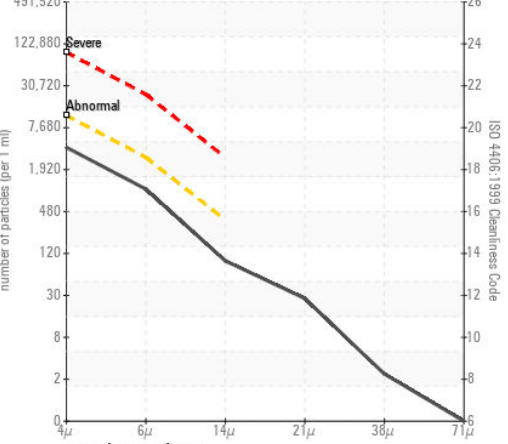

Acid Number

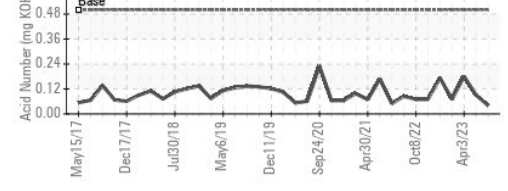

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0820589 Received : 14 Aug 2023  
 Lab Number : 05923364 Diagnosed : 15 Aug 2023  
 Unique Number : 10603311 Diagnostician : Don Baldrige  
 Test Package : IND 2 ( Additional Tests: PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**HORMEL FOODS - AUSTIN**  
 1101 NORTH MAIN ST  
 AUSTIN, MN  
 US 55912  
 Contact: RYAN LOWE  
 rslowe@hormel.com  
 T: (507)437-5674  
 F: (507)437-9805