


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id **29** Component **Turbine**

R&O OIL ISO 68 (--- QTS)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


v2015 May2009 May2007 Sap2008 Oct2009 May2011 Jan2015 Aug2019							
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		WC0813272	WC0700743	WC0577565	
Sample Date		Client Info		13 Aug 2023	14 Sep 2022	16 Nov 2021	
Machine Age	hrs	Client Info		0	0	0	
Oil Age	hrs	Client Info		0	0	0	
Oil Changed		Client Info		N/A	N/A	N/A	
Sample Status				NORMAL	NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>15	5	7	8	
Chromium	ppm	ASTM D5185m	>4	0	0	0	
Nickel	ppm	ASTM D5185m	>2	0	0	0	
Titanium	ppm	ASTM D5185m		<1	0	0	
Silver	ppm	ASTM D5185m		0	0	0	
Aluminum	ppm	ASTM D5185m	>10	<1	1	0	
Lead	ppm	ASTM D5185m		0	0	0	
Copper	ppm	ASTM D5185m	>5	2	2	2	
Tin	ppm	ASTM D5185m	>5	0	0	0	
Antimony	ppm	ASTM D5185m				0	
Vanadium	ppm	ASTM D5185m		<1	0	0	
Cadmium	ppm	ASTM D5185m		0	0	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	5	0	0	0	
Barium	ppm	ASTM D5185m	5	<1	0	0	
Molybdenum	ppm	ASTM D5185m	5	0	0	0	
Manganese	ppm	ASTM D5185m		<1	<1	<1	
Magnesium	ppm	ASTM D5185m	5	6	0	0	
Calcium	ppm	ASTM D5185m	5	0	0	0	
Phosphorus	ppm	ASTM D5185m	100	3	<1	2	
Zinc	ppm	ASTM D5185m	25	33	13	1	
Sulfur	ppm	ASTM D5185m	1500	121	115	186	
CONTAMINANTS	3	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	3	2	2	
Sodium	ppm	ASTM D5185m		1	0	0	
Potassium	ppm	ASTM D5185m	>20	<1	2	0	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647		2811	12382	8375	
Particles >6µm		ASTM D7647	>1300	73	301	167	
Particles >14μm		ASTM D7647	>160	5	2	5	
Particles >21µm		ASTM D7647	>40	2	0	1	
Particles >38µm		ASTM D7647	>10	0	0	0	
Particles >71µm		ASTM D7647	>3	0	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/14	19/13/10	21/15/9	20/15/10	
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.08	0.088	0.063	0.06	




OIL ANALYSIS REPORT










VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.03	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES		method				history2	
Visc @ 40°C	cSt	ASTM D445	68	66.4	66.7	66.6	


SAMPLE IMAGES

Color

Bottom





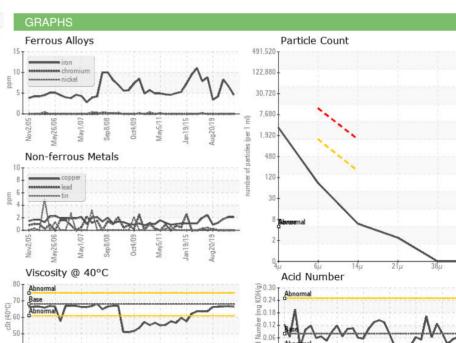

: 14 Aug 2023

: 15 Aug 2023





Certificate L2367

Laboratory

Sample No. Lab Number

Unique Number

: WC0813272 : 05923410

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received Diagnosed

Diagnostician : Don Baldridge

: 10603357 Test Package : IND 2 (Additional Tests: KF)

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

AURIA SOLUTIONS

P.O. Box 580 Albemarle, NC US 28001

Contact: STEPHEN MOSS smoss@iacna.com

Contact/Location: STEPHEN MOSS - COLALB

T: (704)983-8334 F: (704)983-8372

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)