


PROBLEM SUMMARY

Sample Rating Trend




ISO

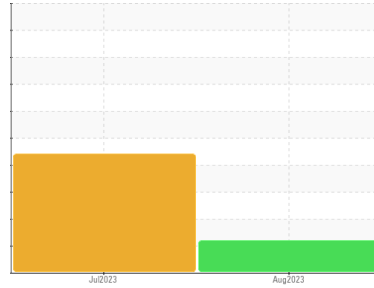

Machine Id
ENTRY SYS - PARAGON MUSKOGEE
 Component
Hydraulic System
 Fluid
TULCO LUBSOIL SUPER HYDRAULIC AW 46 (110 GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

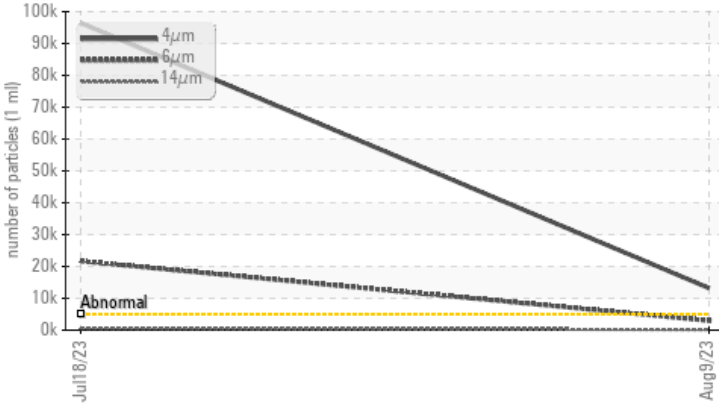

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	SEVERE	---
Particles >4µm	ASTM D7647	>5000	▲ 13199	● 96451	---
Particles >6µm	ASTM D7647	>1300	▲ 2950	● 21639	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 21/19/14	● 24/22/16	---

Customer Id: UCTULTUL
 Sample No.: TO10001889
 Lab Number: 05923445
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

18 Jul 2023 Diag: Wes Davis

ISO




We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. All component wear rates are normal. There is a high amount of particulates (2 to 100 microns in size) present in the oil. The water content is negligible. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report



Machine Id
ENTRY SYS - PARAGON MUSKOGEE
 Component
Hydraulic System
 Fluid
TULCO LUBSOIL SUPER HYDRAULIC AW 46 (110 GAL)

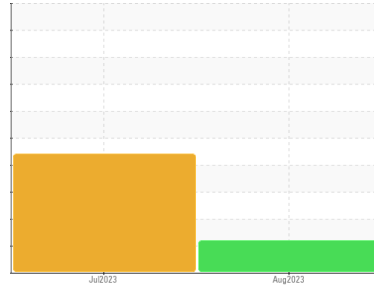

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	TO10001889	TO10001923	---
Sample Date	Client Info	09 Aug 2023	18 Jul 2023	---
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	---
Sample Status		ABNORMAL	SEVERE	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >20	3	6	---
Chromium ppm	ASTM D5185m >20	0	0	---
Nickel ppm	ASTM D5185m >20	0	0	---
Titanium ppm	ASTM D5185m	<1	0	---
Silver ppm	ASTM D5185m	0	0	---
Aluminum ppm	ASTM D5185m >20	<1	1	---
Lead ppm	ASTM D5185m >20	0	0	---
Copper ppm	ASTM D5185m >20	3	2	---
Tin ppm	ASTM D5185m >20	<1	0	---
Vanadium ppm	ASTM D5185m	<1	0	---
Cadmium ppm	ASTM D5185m	0	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	0	0	---
Barium ppm	ASTM D5185m	<1	0	---
Molybdenum ppm	ASTM D5185m	0	0	---
Manganese ppm	ASTM D5185m	<1	0	---
Magnesium ppm	ASTM D5185m	79	77	---
Calcium ppm	ASTM D5185m	104	83	---
Phosphorus ppm	ASTM D5185m 450	291	299	---
Zinc ppm	ASTM D5185m 540	345	374	---
Sulfur ppm	ASTM D5185m 1825	1922	1952	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >15	<1	<1	---
Sodium ppm	ASTM D5185m	3	0	---
Potassium ppm	ASTM D5185m >20	0	<1	---
Water %	ASTM D6304 >0.05	0.011	0.011	---
ppm Water	ASTM D6304 >500	110.4	112.8	---






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	▲ 13199	● 96451	---
Particles >6µm	ASTM D7647 >1300	▲ 2950	● 21639	---
Particles >14µm	ASTM D7647 >160	143	▲ 571	---
Particles >21µm	ASTM D7647 >40	31	▲ 139	---
Particles >38µm	ASTM D7647 >10	1	3	---
Particles >71µm	ASTM D7647 >3	0	0	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	▲ 21/19/14	● 24/22/16	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045 .7	0.41	0.41	---


OIL ANALYSIS REPORT

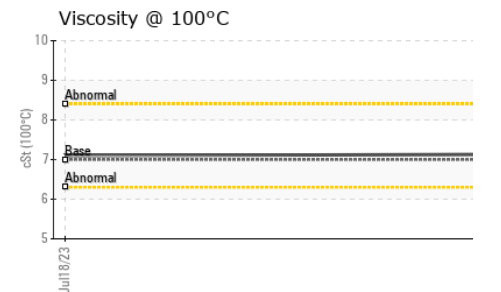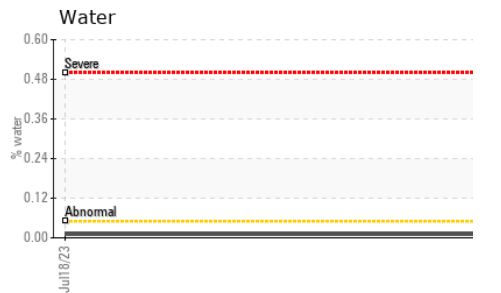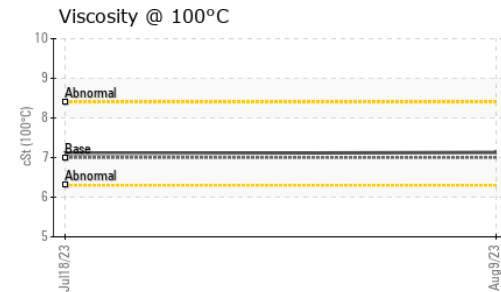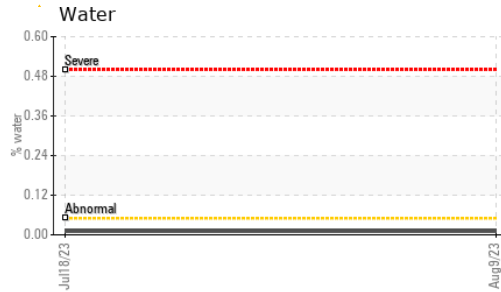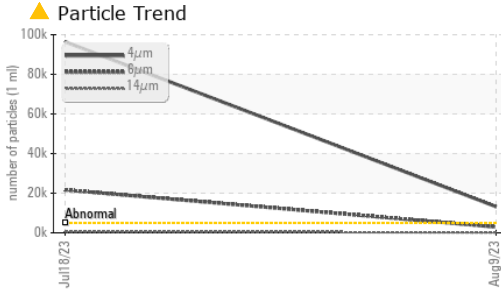



VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	48.2	48.9
Visc @ 100°C	cSt	ASTM D445	7	7.13	7.1
Viscosity Index (VI)	Scale	ASTM D2270	109	105	102

SAMPLE IMAGES

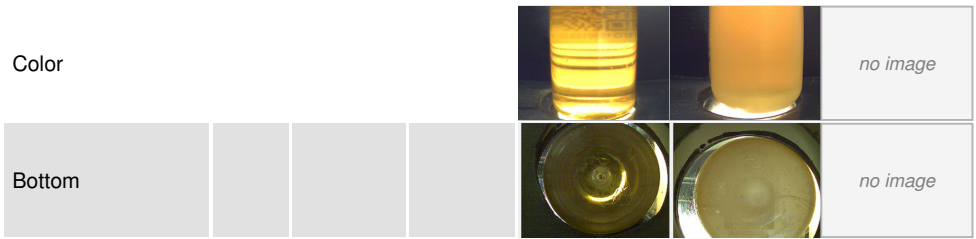

GRAPHS

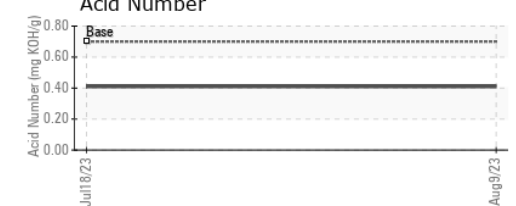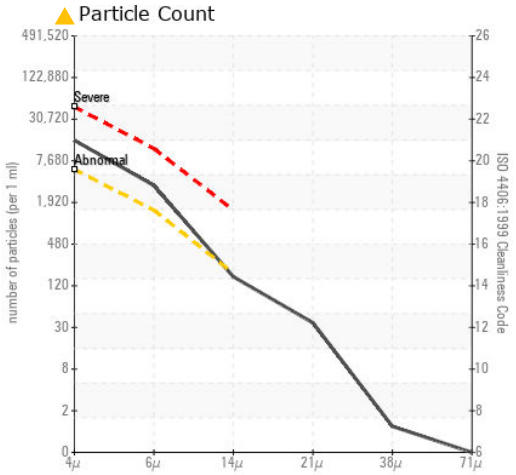

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10001889 **Received** : 14 Aug 2023
Lab Number : 05923445 **Diagnosed** : 16 Aug 2023
Unique Number : 10603392 **Diagnostician** : Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, KV100, VI)

TULCO OILS INC (001-TULSA DIVISION)
 5240 EAST PINE
 TULSA, OK
 US 74115
 Contact: DYLAN COPE
 dylancope@tulco.com
 T: (800)375-2347
 F: x:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)