




OIL ANALYSIS REPORT

Sample Rating Trend

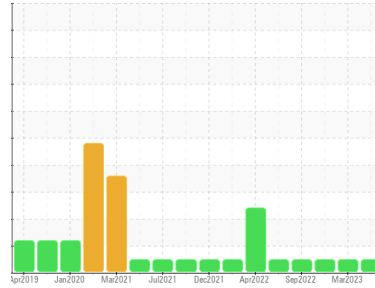

NORMAL



Machine Id
PETERBILT TK9745

Component
Diesel Engine

Fluid
SHELL ROTELLA T 15W40 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0793354	WC0779705	WC0723258
Sample Date	Client Info		02 Aug 2023	07 Mar 2023	23 Nov 2022
Machine Age	hrs	Client Info	9937	9203	8632
Oil Age	hrs	Client Info	1531	2089	1518
Oil Changed	Client Info		Changed	Changed	Not Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	6	19	11
Chromium	ppm	ASTM D5185m >4	<1	<1	<1
Nickel	ppm	ASTM D5185m >2	0	0	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >25	0	2	2
Lead	ppm	ASTM D5185m >45	<1	4	4
Copper	ppm	ASTM D5185m >85	<1	3	2
Tin	ppm	ASTM D5185m >4	<1	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 316	4	23	45
Barium	ppm	ASTM D5185m 0.0	0	0	0
Molybdenum	ppm	ASTM D5185m 1.2	58	20	12
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 24	950	263	125
Calcium	ppm	ASTM D5185m 2292	1246	2027	2251
Phosphorus	ppm	ASTM D5185m 1064	1074	930	904
Zinc	ppm	ASTM D5185m 1160	1329	1132	1185
Sulfur	ppm	ASTM D5185m 4996	4244	4004	4932

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	4	7	6
Sodium	ppm	ASTM D5185m	2	3	3
Potassium	ppm	ASTM D5185m >20	<1	4	2


INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.1	0.2	0.2
Nitration	Abs/cm	*ASTM D7624 >20	8.0	10.0	10.4
Sulfation	Abs./1mm	*ASTM D7415 >30	19.7	25.9	27.0




OIL ANALYSIS REPORT


Particle Trend

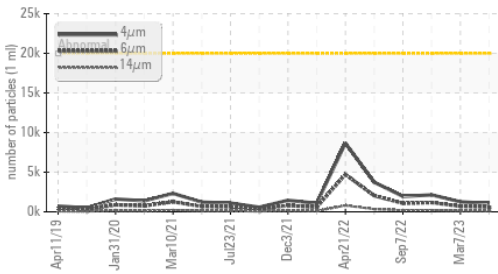


Base Number

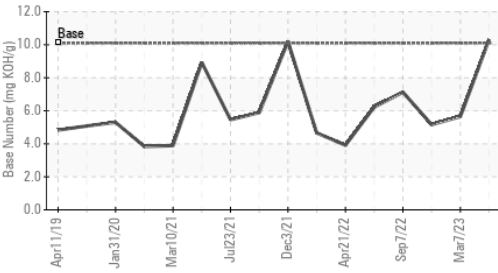

Viscosity @ 100°C

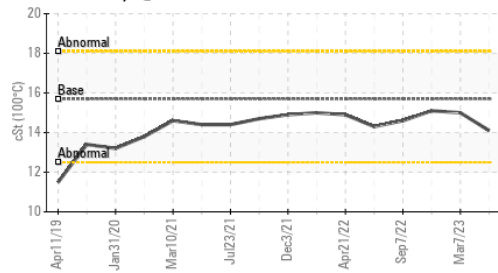

Particle Trend

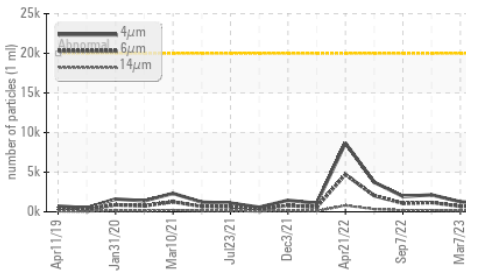

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	1061	1262	2140
Particles >6µm	ASTM D7647	>5000	578	687	1166
Particles >14µm	ASTM D7647	>640	98	117	198
Particles >21µm	ASTM D7647	>160	33	39	67
Particles >38µm	ASTM D7647	>40	5	6	10
Particles >71µm	ASTM D7647	>10	1	1	1
Oil Cleanliness	ISO 4406 (c)	>21/19/16	17/16/14	17/17/14	18/17/15


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	*ASTM D7414	>25	16.0	22.5	23.4
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	10.31	5.65	5.16

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.7	14.1	15.0	15.1

GRAPHS


Ferrous Alloys

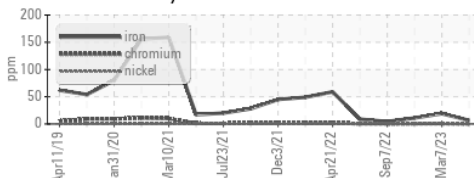


Non-ferrous Metals

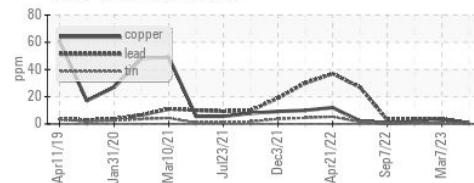


Viscosity @ 100°C

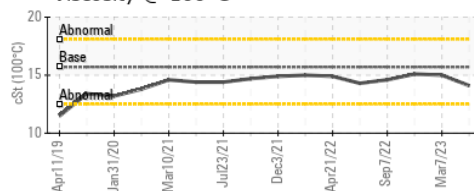

Particle Count

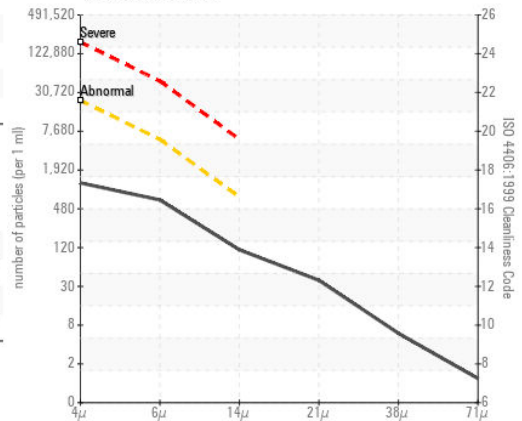

Base Number

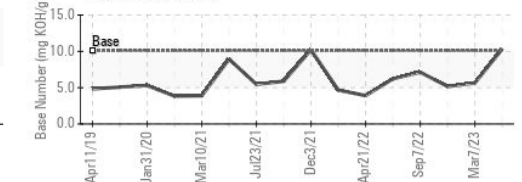

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0793354
 Lab Number : **05923545**
 Unique Number : 10603492
 Test Package : MOB 2 (Additional Tests: PrtCount)

MCMAHAN WELDING SERVICE LTD
 269 US HWY 183 SOUTH
 CUERO, TX
 US 77954
 Contact: BILL FOJTIK
 info@mcmahanservices.com
 T: (361)275-0111
 F: (361)275-0110

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)