




OIL ANALYSIS REPORT

Sample Rating Trend

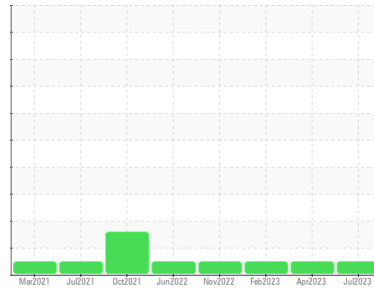

NORMAL



Machine Id
35141

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 40 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KL0012040	KLM2339403	KLM2339407
Sample Date	Client Info			25 Jul 2023	08 Apr 2023	12 Feb 2023
Machine Age	mls	Client Info		65861	59570	153589
Oil Age	mls	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>65	9	4	4
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>5	<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>35	2	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>180	12	3	2
Tin	ppm	ASTM D5185m	>8	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	56	105	98
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	54	51	50
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m	450	961	964	909
Calcium	ppm	ASTM D5185m	3000	1177	1141	1156
Phosphorus	ppm	ASTM D5185m	1150	1039	1058	959
Zinc	ppm	ASTM D5185m	1350	1274	1271	1254
Sulfur	ppm	ASTM D5185m	4250	4155	4401	3993


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	5	4	4
Sodium	ppm	ASTM D5185m	>216	4	2	2
Potassium	ppm	ASTM D5185m	>20	2	1	3

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.3	0.1	0.2
Nitration	Abs/cm	*ASTM D7624	>20	7.4	5.5	5.8
Sulfation	Abs./1mm	*ASTM D7415	>30	19.4	18.8	18.8




OIL ANALYSIS REPORT


Particle Trend

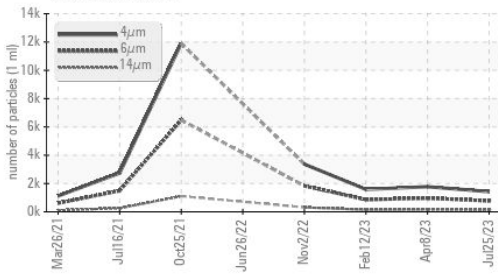


Base Number

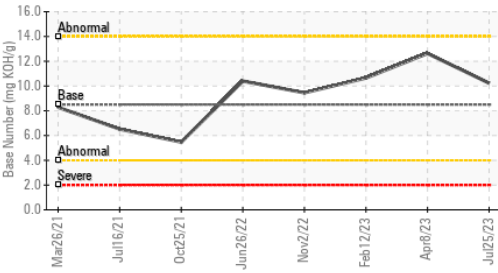

Viscosity @ 100°C

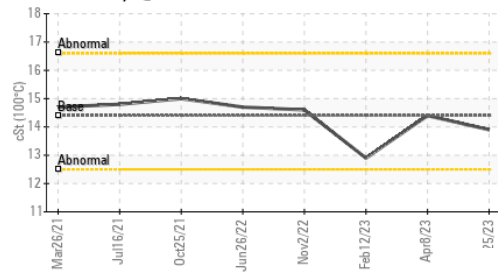

Particle Trend

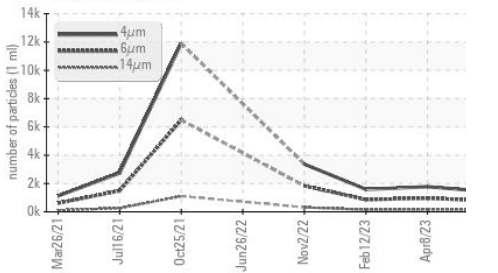

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		1427	1775	1583
Particles >6µm	ASTM D7647	>5000	777	967	862
Particles >14µm	ASTM D7647	>640	132	165	147
Particles >21µm	ASTM D7647	>160	45	55	49
Particles >38µm	ASTM D7647	>40	7	9	8
Particles >71µm	ASTM D7647	>10	1	1	1
Oil Cleanliness	ISO 4406 (c)	>19/16	17/14	17/15	17/14


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	*ASTM D7414	>25	15.2	13.3	13.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	10.23	12.63	10.65

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	13.9	14.4	12.9

GRAPHS


Ferrous Alloys

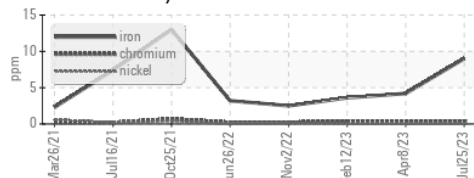


Non-ferrous Metals

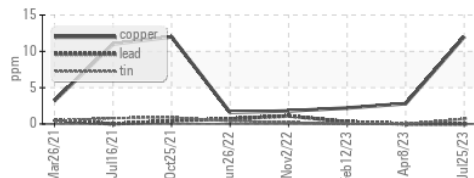


Viscosity @ 100°C

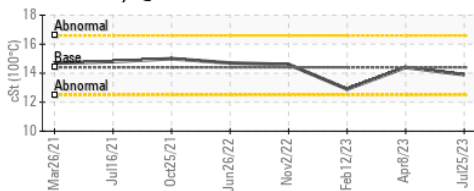

Particle Count

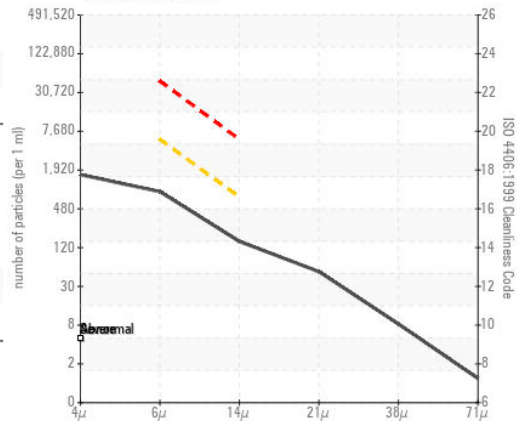

Base Number

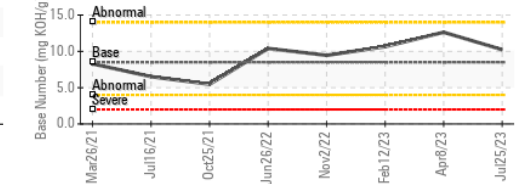

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : KL0012040 Received : 14 Aug 2023
 Lab Number : 05923552 Diagnosed : 15 Aug 2023
 Unique Number : 10603499 Diagnostician : Doug Bogart
 Test Package : MOB 2 (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CITY & COUNTY HONOLULU
 99-999 IWAENA RD
 AIEA, HI
 US 96701
 Contact: CLYDE OMIJA
 comija@honolulu.gov
 T: (575)623-9952
 F: