




# OIL ANALYSIS REPORT

Sample Rating Trend

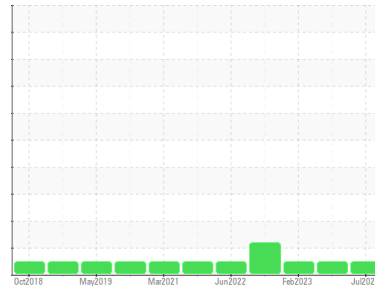

**NORMAL**



Machine Id  
**FREIGHTLINER 35142**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KL0012041</b>	KLM2339433	KLM2339427
Sample Date	Client Info		<b>28 Jul 2023</b>	12 Apr 2023	13 Feb 2023
Machine Age	mls	Client Info	<b>181601</b>	181396	177306
Oil Age	mls	Client Info	<b>0</b>	0	101469
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>65	<b>2</b>	4	8
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>35	<b>&lt;1</b>	<1	4
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>180	<b>1</b>	5	7
Tin	ppm	ASTM D5185m	>8	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	250	<b>123</b>	97	70
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>71</b>	64	59
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m	450	<b>899</b>	1088	1080
Calcium	ppm	ASTM D5185m	3000	<b>1305</b>	1119	1188
Phosphorus	ppm	ASTM D5185m	1150	<b>1100</b>	1054	1006
Zinc	ppm	ASTM D5185m	1350	<b>1312</b>	1289	1345
Sulfur	ppm	ASTM D5185m	4250	<b>4409</b>	4232	3859

## CONTAMINANTS





	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	<b>4</b>	6	6
Sodium	ppm	ASTM D5185m	>158	<b>2</b>	2	4
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	8

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.6</b>	6.9	7.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.5</b>	19.3	20.2



# OIL ANALYSIS REPORT

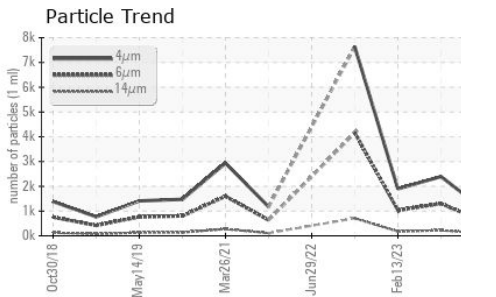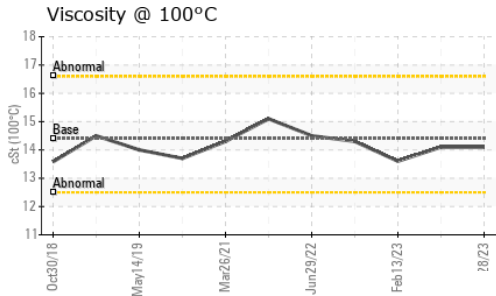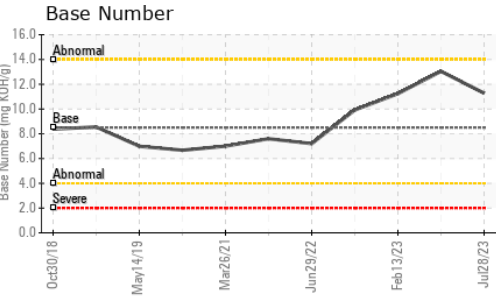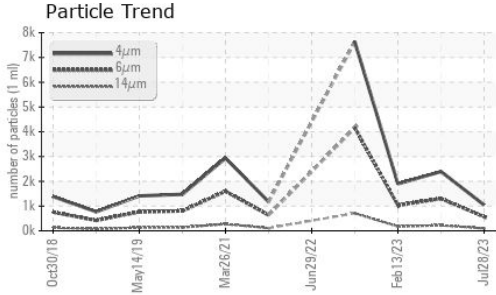




FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>1044</b>	2392	1897
Particles >6µm	ASTM D7647	>5000	<b>569</b>	1303	1033
Particles >14µm	ASTM D7647	>640	<b>97</b>	222	176
Particles >21µm	ASTM D7647	>160	<b>33</b>	75	59
Particles >38µm	ASTM D7647	>40	<b>5</b>	12	9
Particles >71µm	ASTM D7647	>10	<b>1</b>	1	1
Oil Cleanliness	ISO 4406 (c)	>19/16	<b>16/14</b>	18/15	17/15

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	<b>13.3</b>	14.9	15.8
Base Number (BN)	mg KOH/g ASTM D2896	8.5	<b>11.28</b>	13.04	11.24

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar *Visual		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445	14.4	<b>14.1</b>	14.1	13.6

## GRAPHS

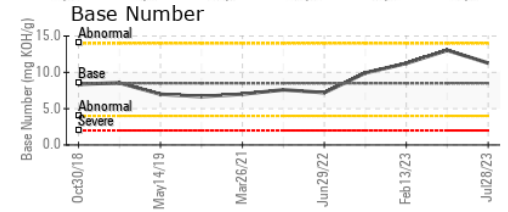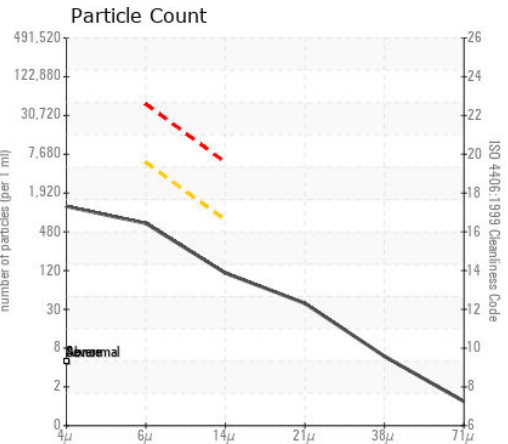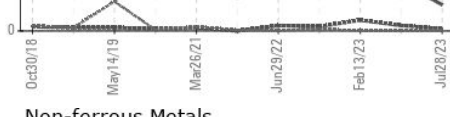

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0012041 **Received** : 14 Aug 2023  
**Lab Number** : 05923553 **Diagnosed** : 15 Aug 2023  
**Unique Number** : 10603500 **Diagnostician** : Doug Bogart  
**Test Package** : MOB 2 ( Additional Tests: PrtCount )

**CITY & COUNTY HONOLULU**  
 99-999 IWAENA RD  
 AIEA, HI  
 US 96701  
 Contact: CLYDE OMIJA  
 comija@honolulu.gov  
 T: (575)623-9952  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)