




OIL ANALYSIS REPORT

Sample Rating Trend

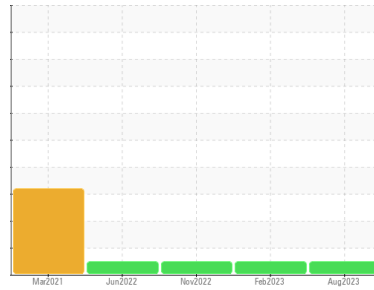

NORMAL



Machine Id
35164

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 40 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KL0012005	KLM2339390	KL0009821
Sample Date	Client Info			02 Aug 2023	10 Feb 2023	03 Nov 2022
Machine Age	mls	Client Info		105628	95963	90197
Oil Age	mls	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>6.0		<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	26	8	4
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	2	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	4	2	<1
Lead	ppm	ASTM D5185m	>40	10	2	1
Copper	ppm	ASTM D5185m	>330	4	3	1
Tin	ppm	ASTM D5185m	>15	2	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	17	52	99
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	65	60	59
Manganese	ppm	ASTM D5185m		<1	1	<1
Magnesium	ppm	ASTM D5185m	450	1107	1110	1111
Calcium	ppm	ASTM D5185m	3000	1088	1080	1140
Phosphorus	ppm	ASTM D5185m	1150	1034	979	1048
Zinc	ppm	ASTM D5185m	1350	1309	1313	1315
Sulfur	ppm	ASTM D5185m	4250	3686	3706	3934

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	6	4	3
Sodium	ppm	ASTM D5185m	>216	27	16	6
Potassium	ppm	ASTM D5185m	>20	7	5	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.7	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	11.0	8.5	6.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.1	21.7	21.3



OIL ANALYSIS REPORT

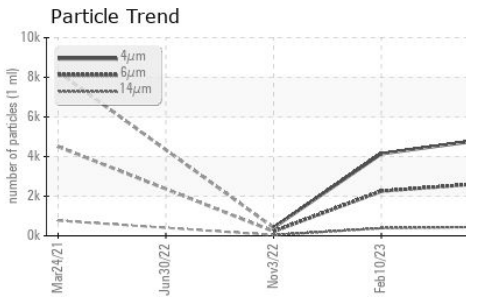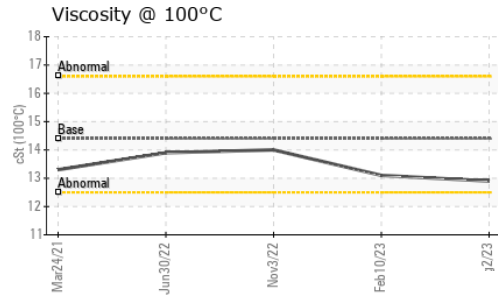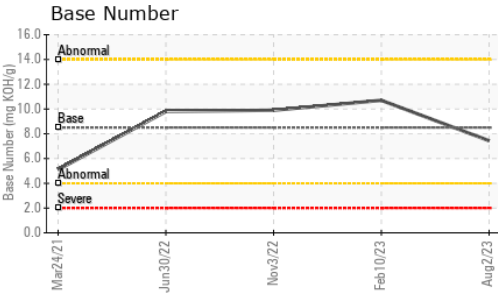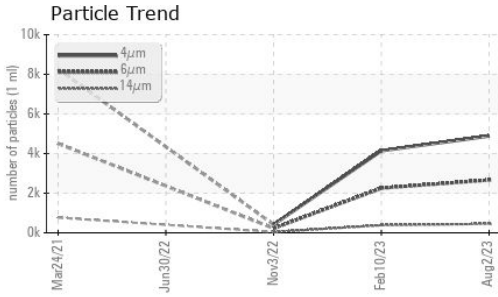






FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		4888	4141	415
Particles >6µm	ASTM D7647	>5000	2663	2256	226
Particles >14µm	ASTM D7647	>640	453	384	39
Particles >21µm	ASTM D7647	>160	153	129	13
Particles >38µm	ASTM D7647	>40	24	20	2
Particles >71µm	ASTM D7647	>10	2	2	0
Oil Cleanliness	ISO 4406 (c)	>19/16	19/16	18/16	15/12

FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	*ASTM D7414	>25	24.9	18.6	16.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.44	10.70	9.90

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	12.9	13.1	14.0

GRAPHS

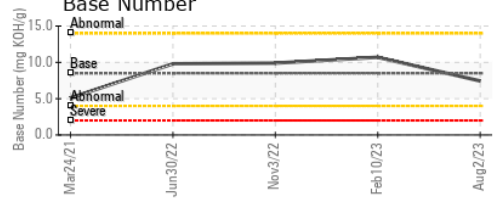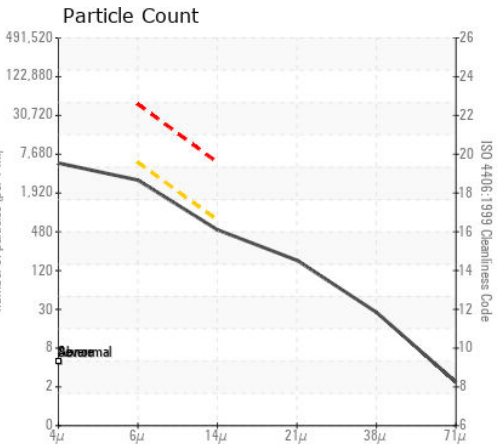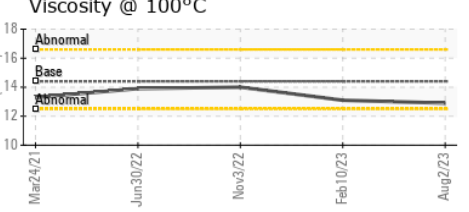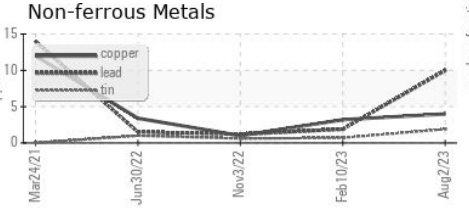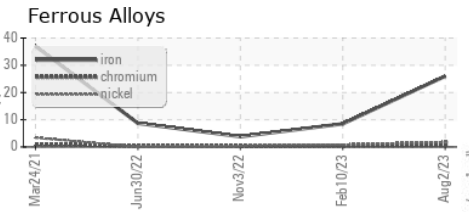

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0012005 **Received** : 14 Aug 2023
Lab Number : 05923560 **Diagnosed** : 15 Aug 2023
Unique Number : 10603507 **Diagnostician** : Doug Bogart
Test Package : MOB 2 (Additional Tests: PrtCount)

CITY & COUNTY HONOLULU
 99-999 IWAENA RD
 AIEA, HI
 US 96701
 Contact: CLYDE OMIJA
 comija@honolulu.gov
 T: (575)623-9952
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)