




OIL ANALYSIS REPORT

Sample Rating Trend

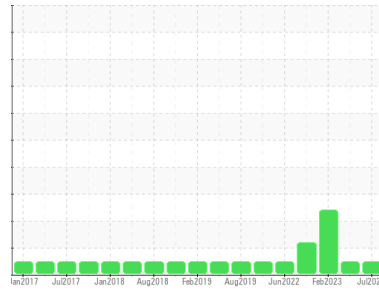

NORMAL



Machine Id
AUTOCAR 27245

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0012052	KLM2339289	KLM2339469
Sample Date	Client Info		25 Jul 2023	10 Apr 2023	10 Feb 2023
Machine Age	mls	Client Info	95111	91980	89761
Oil Age	mls	Client Info	0	0	11754
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	4	19	17
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >4	0	0	0
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	<1	1	2
Lead	ppm	ASTM D5185m >40	0	0	<1
Copper	ppm	ASTM D5185m >330	0	3	2
Tin	ppm	ASTM D5185m >15	0	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	100	37	75
Barium	ppm	ASTM D5185m 10	0	0	0
Molybdenum	ppm	ASTM D5185m 100	69	56	54
Manganese	ppm	ASTM D5185m	<1	<1	2
Magnesium	ppm	ASTM D5185m 450	857	979	964
Calcium	ppm	ASTM D5185m 3000	1356	1102	1144
Phosphorus	ppm	ASTM D5185m 1150	1097	1050	972
Zinc	ppm	ASTM D5185m 1350	1315	1301	1275
Sulfur	ppm	ASTM D5185m 4250	4384	4109	3766

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	3	6	6
Sodium	ppm	ASTM D5185m >158	2	3	14
Potassium	ppm	ASTM D5185m >20	0	2	12


INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	0.5	0.4
Nitration	Abs/cm	*ASTM D7624 >20	6.4	9.1	7.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.2	23.2	21.5




OIL ANALYSIS REPORT


Particle Trend

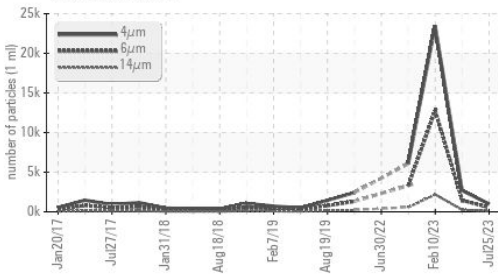


Base Number

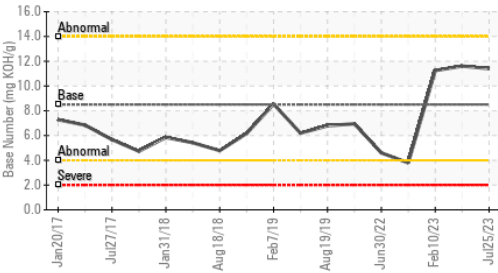

Viscosity @ 100°C

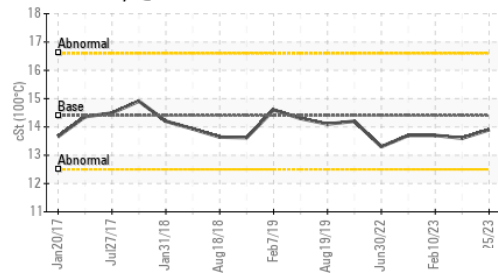

Particle Trend

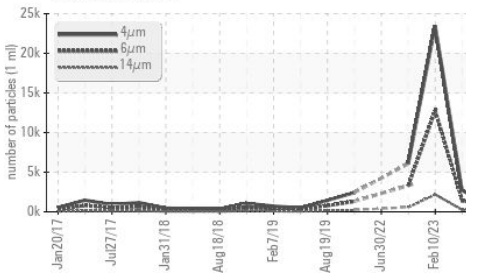

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		992	2680	23463
Particles >6µm	ASTM D7647	>5000	540	1460	▲ 12782
Particles >14µm	ASTM D7647	>640	92	248	▲ 2175
Particles >21µm	ASTM D7647	>160	31	84	▲ 733
Particles >38µm	ASTM D7647	>40	5	13	▲ 113
Particles >71µm	ASTM D7647	>10	0	1	▲ 12
Oil Cleanliness	ISO 4406 (c)	>19/16	16/14	18/15	▲ 21/18


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	*ASTM D7414	>25	14.5	20.7	18.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	11.40	11.61	11.25

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	13.9	13.6	13.7

GRAPHS


Ferrous Alloys

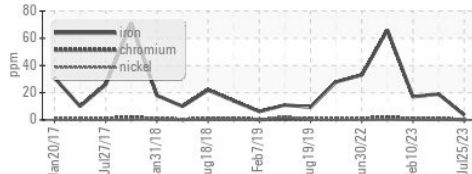


Non-ferrous Metals

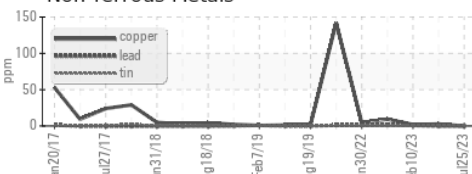


Viscosity @ 100°C

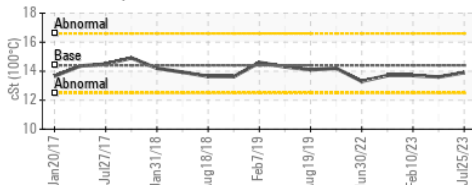

Particle Count

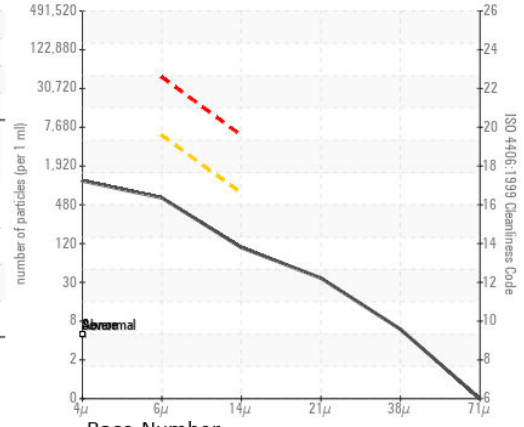

Base Number

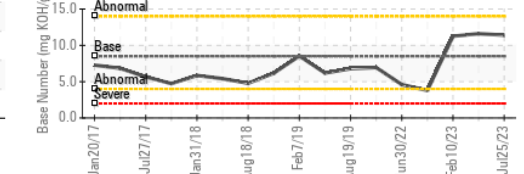

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : KL0012052 Received : 14 Aug 2023
 Lab Number : 05923569 Diagnosed : 16 Aug 2023
 Unique Number : 10603516 Diagnostician : Angela Borella
 Test Package : MOB 2 (Additional Tests: PrtCount)

CITY & COUNTY HONOLULU
 99-999 IWAENA RD
 AIEA, HI
 US 96701
 Contact: CLYDE OMIJA
 comija@honolulu.gov
 T: (575)623-9952
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)